

Modular Preparation 1200 mm Work Top with Upstand

TEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



121138 (TPLA12A)

Work Top with upstand 1200mm

Short Form Specification

Item No.

The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 900mm.

Main Features

- Special shaped front and rear profiles without burrs to avoid water leakage on modules below.
- Extremely easy to clean thanks to the large and smooth seamless surface with Scotch-Brite finishing.

Construction

- 304 AISI stainless steel worktop (CrNi 18/10) 40 mm high, 15/10 (16 gauges) thickness.
- 18mm under panel made of sound deadening material according to E1 European specifications.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- For a work height of 900 mm, worktops can be mounted on: solid bracket, solid bracket plus 50x50mm legs, 710 mm ambient, hot, refrigerated or freezer units with hinged doors or telescopic drawers, placed on oversized (65x65mm) or 150mm high feet (0/+90mm adjustable in height).
- Fully welded and polished corners.
- 100 mm boxed heavy duty splashback with a 45° degrees top angle, folded directly from the worktop, has fully welded sides and rear part completely covered by stainless steel profile to avoid water spillage on modules below.

Optional Accessories


Optional Accessories		
 Double plastic drain syphon 2 " for sinks 	PNC 850022 [
 Drop-in soaking unit 800x500x350mm 	PNC 855216	
 Single plastic drain syphon 1,5 for work tables with bowl 	PNC 855306 [_
 Drop-in Bowl and right-hand drainage 400x400x200mm 	PNC 855800 [_
Drop-in Bowl and right-hand drainage 600x500x250mm	PNC 855801	
• Side upstand, h=100mm	PNC 855802 [
Bowl Skirting (400x400x200) for cantilever execution	PNC 855806 [
 Bowl Skirting (600x500x250) for cantilever execution 	PNC 855807 [
 Bowl Skirting (2x600x500x250) for cantilever execution 	PNC 855808 [_
Stainless steel square tube wall bracket	PNC 855814 [_
 Stainless steel wall bracket with squared leg 50x50mm 	PNC 855815	
Drop-in Bowl and left-hand drainage 400x400x200mm	PNC 855816	_
Drop-in Bowl and left-hand drainage 600x500x250mm	PNC 855817	
False bottom for right hand 600x500mm Bowl	PNC 895100	
 False bottom for left hand 600x500mm Bowl 	PNC 895110	
• Single plastic drain syphon 2" for Sinks	PNC 895313	_

APPROVAL:





Modular Preparation 1200 mm Work Top with Upstand

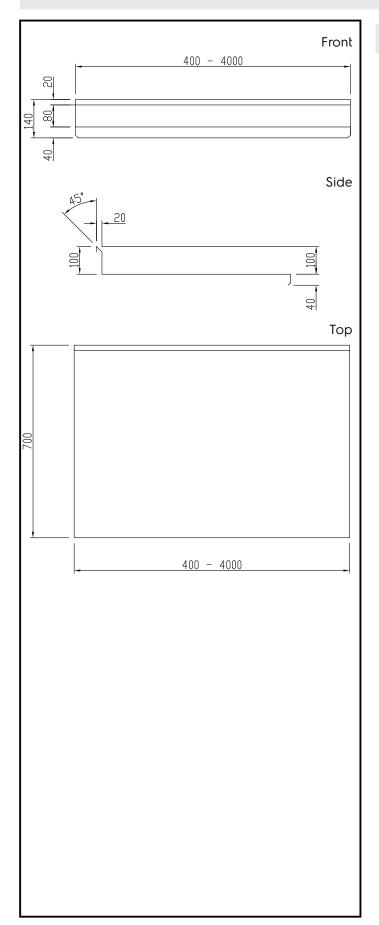

Key Information:

External dimensions, Width:

121138 (TPLA12A)1200 mmExternal dimensions, Depth:700 mmExternal dimensions, Height:140 mmUpstand Dimensions, Height:100 mmUpstand Dimensions, Radius:90°Worktop thickness:40 mmNet weight:41 kg

Modular Preparation 1200 mm Work Top with Upstand