

Standard Preparation 600 mm Ventilated Hot Cupboard with Shelf & 1 Hinged Door - no top



133187 (RHC6001HD)

Hot Cupboard with 1 hinged door - no Top, 600mm

Short Form Specification

Item No.

Made entirely from stainless steel. Inner welded frame in stainless steel. No top unit for integrated solutions. Sound-deadened hinged door. Base panel in 304 AISI stainless steel and heightadjustable intermediate shelf. Mounted on feet, adjustable in height. Ventilated hot air flow system guarantees temperature evenness, air flows underneath the intermediate shelf and throughout the cabinet. Thermostat with digital display to adjust the internal temperature (up to 75°C).

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Ideal for central positioning in the kitchen, either as island installation or back to back.
- Handles in stainless steel for better hygiene and reliability.
- Sturdiness, stability and reliability of table accurately tested.

Construction

- Reinforced side and base panel in 304 AISI stainless steel.
- 304 AISI stainless steel feet, 200 mm high and 54 mm in diameter, adjustable by -50/+30 mm.
- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Equipped with intermediate shelf which can be positioned at three different heights.
- Sturdy sound-deadened hinged doors on tracks located flush to the front of the frame.
- Without top for integrated solutions.
- Hinged door with sound deadening internal panels, fitted with 304 AISI stainless steel hinges on the inner sides.


Optional Accessories

- Stainless steel front kicking PNC 133205 □ strip
- Side kicking strip, 700 mm PNC 133206 🗅

APPROVAL:

Electrolux PROFESSIONAL

Standard Preparation 600 mm Ventilated Hot Cupboard with Shelf & 1 Hinged Door - no top

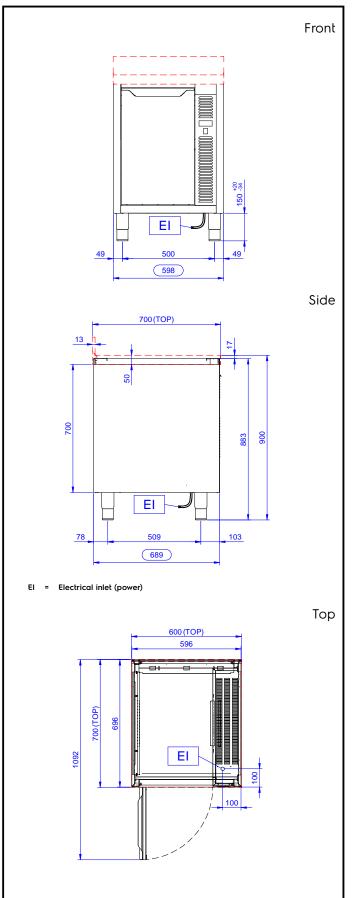

Electric

Supply voltage: 133187 (RHC6001HD) Total Watts:	220-240 V/1N ph/50/60 Hz 2.4 kW
Key Information:	
Cabinet width: Cabinet depth: Cabinet height: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Net weight:	430 mm 645 mm 610 mm 600 mm 700 mm 883 mm 1 Hinged 55 kg

Standard Preparation 600 mm Ventilated Hot Cupboard with Shelf & 1 Hinged Door - no top

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.