

## Modular Preparation 1600 mm Hot Cupboard with Sliding Doors

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**121908 (TE2SE16)**

 Hot Cupboard with 2 sliding  
doors, 1600mm

### Short Form Specification

**Item No.** \_\_\_\_\_

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Sliding doors incorporate sound deadening internal panels. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting. Hot cupboard with channeled ventilation system (2-way output) to allow for a correct airflow and even temperature within the storage area. Fan-assisted heating via armoured elements assures temperature ranges from 30° to 90° C. Removable control panel with mechanical thermostat, green ON/OFF indicator light and orange indicator light for heating element operation.

### Main Features


- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.

### Construction


- Sound deadening reinforcements between internal and external side panels to strengthen structure.
- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Supplied with a channeled ventilation system (2 way outputs) which allows a correct airflow and even temperature inside the storage area.
- Fan assisted heating via armored elements ensuring temperature range from 30° to 90°C.
- Detachable control panel with mechanical thermostat and on/off green and orange indicator light for heating element operation.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish.
- Sliding doors, with sound deadening internal and external panels, run on the upper part on the s/s bearings and on the lower part on a hidden runner. Doors are easy to remove thus facilitating cleaning procedures.

**APPROVAL:** \_\_\_\_\_

Front

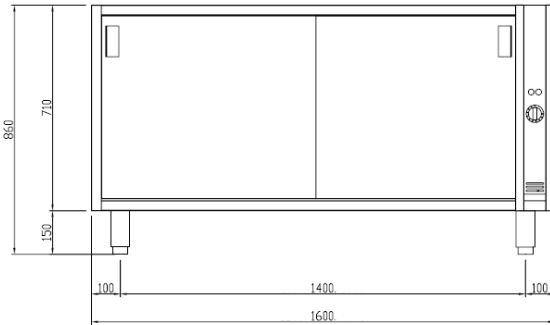


Side



EI = Electrical inlet (power)

Top

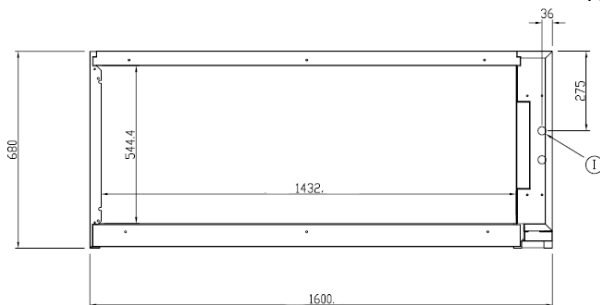

## Electric

### Supply voltage:

121908 (TE2SE16)

230 V/1 ph/50/60 Hz

### Total Watts:

1.8 kW

## Key Information:

**Cabinet width:**

1430 mm

**Cabinet depth:**

620 mm

**Cabinet height:**

645 mm

**N° of doors:**

2

**Door Type:**

Sliding

**External dimensions, Width:**

1600 mm

**External dimensions, Depth:**

680 mm

**External dimensions, Height:**

860 mm

**Net weight:**

102 kg