



Modular Preparation 1600 mm Passthrough Ambient Unit with Sliding Doors


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

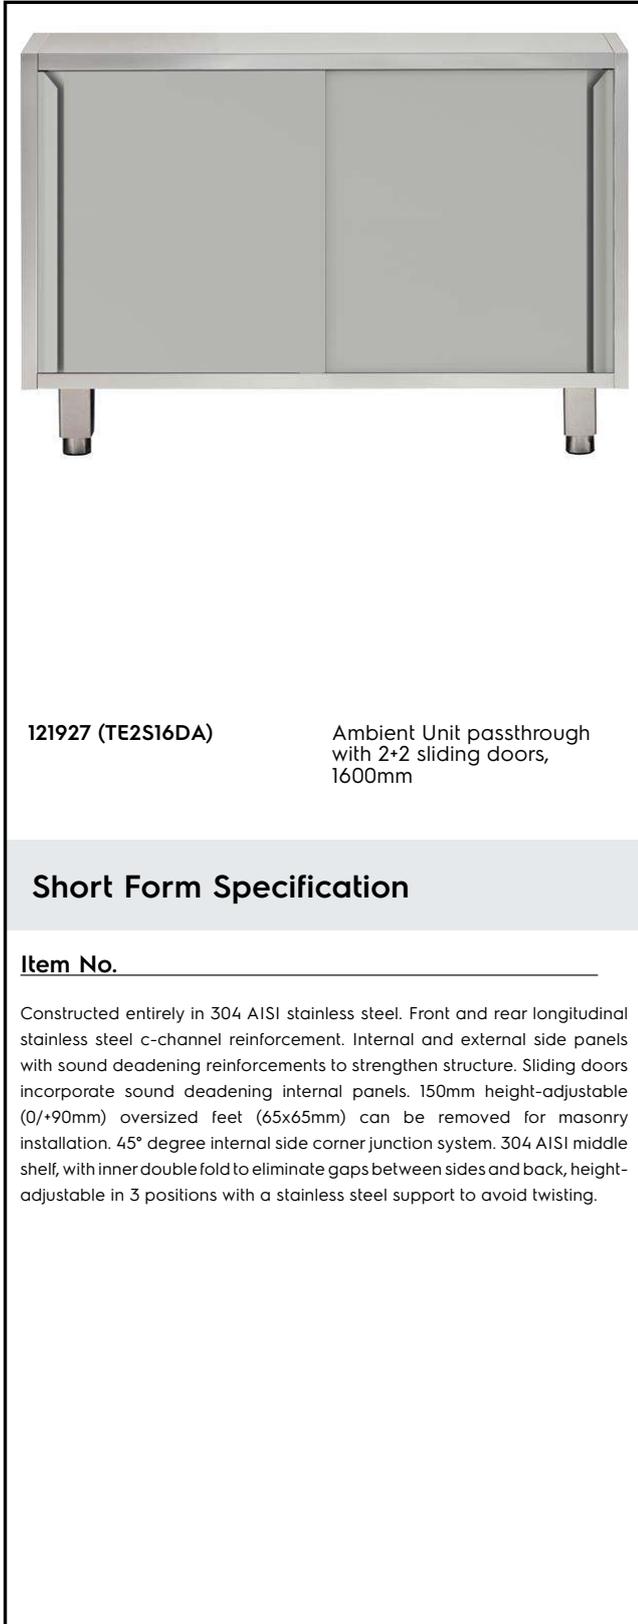

121927 (TE2S16DA)

Ambient Unit passthrough
with 2+2 sliding doors,
1600mm

Short Form Specification

Item No. _____

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Sliding doors incorporate sound deadening internal panels. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

Main Features

- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.

Construction

- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Sound deadening reinforcements between internal and external side panels to strengthen structure.
- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Doors made in 304 AISI stainless steel with Scotch-Brite finishing.
- Sliding doors, with sound deadening internal and external panels, run on the upper part on the s/s bearings and on the lower part on a hidden runner. Doors are easy to remove thus facilitating cleaning procedures.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

Key Information:

Cabinet width:		
121927 (TE2S16DA)	1430 mm	
Cabinet depth:	580 mm	
Cabinet height:	645 mm	
N° of doors:	4	
Door Type:	Sliding	
External dimensions, Width:	1600 mm	
External dimensions, Depth:	680 mm	
External dimensions, Height:	860 mm	
Net weight:	116 kg	

