

## Premium Preparation 2000 mm Passthrough Worktop Cupboard

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**133087 (TND2000EN)**

 Pass-through WorkTop  
Cupboard, with 1 shelf and 4  
sliding doors, (6 feet),  
2000mm

### Short Form Specification

**Item No.** \_\_\_\_\_

The 50mm high worktop in 304 AISI stainless steel, 1,5mm in thickness, is sound-deadened and has anti-drip edges and welded corners. Inner welded frame in stainless steel. Under-top reinforcement in 304 AISI s/s. Intermediate reinforced shelf in 304 AISI s/s that can be positioned at three different heights. Base shelf in 304 AISI s/s, 1mm in thickness, reinforced by 1,5mm support bars in AISI 304 s/s. Four sound-deadened sliding doors in 304 AISI s/s on both sides. Welded construction for maximum strength. Six 2"-feet in 304 AISI stainless steel, h=200mm, adjustable in height (-50/+20mm).

### Main Features

- Worktop cupboard can be mounted on 125 mm diameter castors (2 with brakes) using the optional accessory kit.
- Handles in stainless steel for better hygiene and reliability.
- Sturdiness, stability and reliability of table accurately tested.

### Construction

- Inner welded frame in stainless steel to guarantee superior strength and stability.
- Base panel has 40mm high profile, is 8/10 in thickness with upturned edges and bar reinforcement. It is welded to legs for further structure reinforcement.
- Base panel in AISI 304 stainless steel, 10/10 in thickness reinforced by 15/10 support bars in AISI 304.
- Intermediate shelf in stainless steel with riveted corners and trasversal reinforcement in stainless steel.
- 100 mm upstand with 10 mm radioused corner and 13 mm deep, designed to be used against a wall.
- Heavy duty construction entirely in AISI 304 stainless steel to offer maximum durability.
- 304 AISI stainless steel feet, 150 mm high and 54 mm in diameter, adjustable by -35/+25 mm.

### Optional Accessories

- Wheel kit for cupboards, 4 PNC 855299 ☐  
wheels (2 with brakes), D=100 mm


**APPROVAL:** \_\_\_\_\_




**Electrolux**  
PROFESSIONAL

## Premium Preparation 2000 mm Passthrough Worktop Cupboard


Front

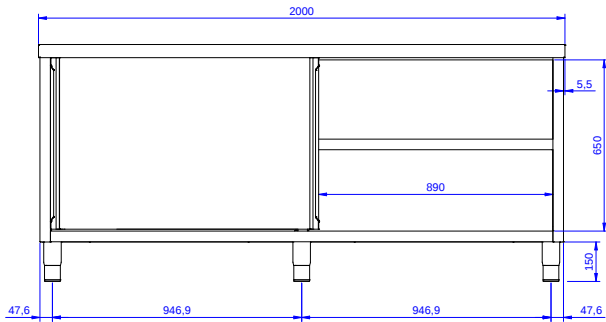

Side



Top

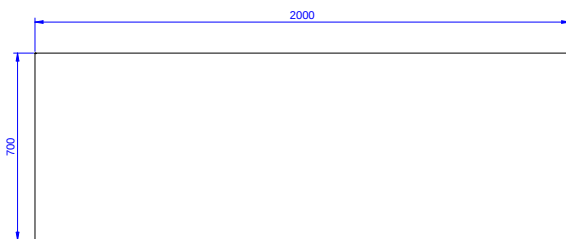

Premium Preparation  
2000 mm Passthrough Worktop Cupboard

The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2026.02.13

**Key Information:**

|                                 |           |
|---------------------------------|-----------|
| Cabinet width:                  |           |
| 133087 (TND2000EN)              | 1945 mm   |
| Cabinet depth:                  | 604 mm    |
| Cabinet height:                 | 610 mm    |
| External dimensions,<br>Width:  | 2000 mm   |
| External dimensions,<br>Depth:  | 700 mm    |
| External dimensions,<br>Height: | 900 mm    |
| Number and type of doors:       | 4 Sliding |
| Worktop thickness:              | 50 mm     |
| Net weight:                     | 75 kg     |