

## Modular Preparation 2400 mm Cupboard Base for Sink Top

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



121829 (TEL2S24)

 Cupboard Base for Sinks  
Top, 2400mm

### Short Form Specification

#### Item No.

Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Easily removable sliding doors with sound deadening internal and external panels have stainless steel bearings on the top and a hidden runner on the bottom. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.

### Main Features

- Masonry installation possible by simply removing feet.
- Extremely easy to clean thanks to the smooth edges.

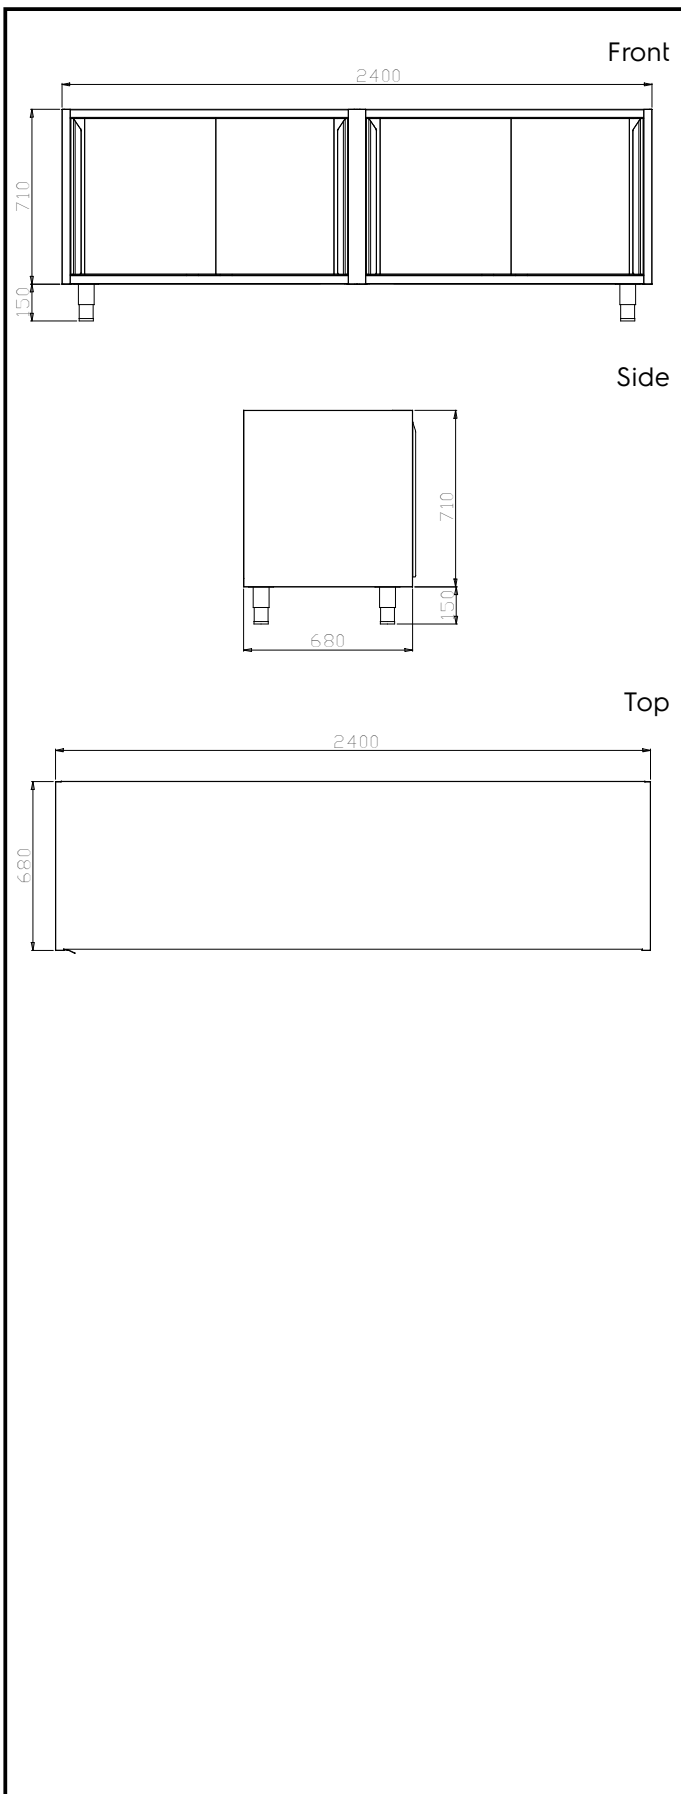
### Construction

- Mounted on 150 mm height adjustable (0/+90 mm) oversized (65x65 mm) feet.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- Sliding doors, with sound deadening internal and external panels, run on the upper part on the s/s bearings and on the lower part on a hidden runner. Doors are easy to remove thus facilitating cleaning procedures.
- Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish.

### Optional Accessories

- Stainless steel plinth for end elements, 700mm depth PNC 855837 ☐
- Stainless steel plinth for end elements, central installation, 700mm depth PNC 855838 ☐
- Stainless steel plinth, 2400mm PNC 855839 ☐

APPROVAL: \_\_\_\_\_

**Key Information:**

<b>Cabinet width:</b>	
121829 (TEL2S24)	2400 mm
<b>Cabinet depth:</b>	680 mm
<b>Cabinet height:</b>	710 mm
<b>N° of doors:</b>	4
<b>Door Type:</b>	Sliding
<b>External dimensions, Width:</b>	2400 mm
<b>External dimensions, Depth:</b>	700 mm
<b>External dimensions, Height:</b>	860 mm
<b>Net weight:</b>	60 kg