

## Ventilation Equipment

### 304 S/S Wall Hood+Filters 1600X900mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



642294 (MP916DT)

 304 stainless steel Wall  
 Hood with filters

### Short Form Specification

Item No. \_\_\_\_\_

Constructed in 304 AISI stainless steel. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel and condensate collecting tray.

#### Main Features

- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.
- Low noise level.

#### Construction

- Eyebolts and screw anchors for ceiling installation.
- Back drain pipe with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- Entirely constructed in 304 AISI stainless steel.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

#### Included Accessories

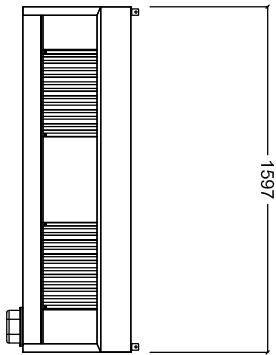
- 2 of 304 Stainless steel labyrinth filter (h=500 mm) PNC 640052

#### Optional Accessories

- Speed Variator for motors up to 1,17 kW PNC 640076
- Drain for hoods, diam.1/2" (m), with plug PNC 640409

APPROVAL: \_\_\_\_\_

Front

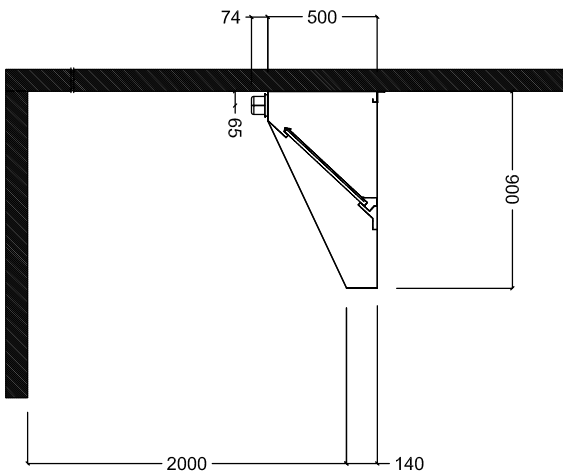

**Key Information:**

External dimensions, Width:	
642294 (MP916DT)	1600 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	500 mm
Net weight:	29 kg

**Air Emission:**

Air capacity:	1600 mc/h
---------------	-----------

Side



Top

