

## Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate

TEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



371411 (E7IIKTAOMCI)

Half module gas Fry Top with smooth brushed chrome cooking Plate, sloped, thermostatic control, scraper included, Q Mark

## **Short Form Specification**

#### Item No.

To be installed on open base installations or bridging supports. Smooth cooking surface in brushed chrome. Suitable to be used with Natural or LPG gas. Temperature range from 100°C to 280°C. Removable drawer below the cooking surface for the collection of grease and fat. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

#### **Main Features**

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Large grease collection container available as optional accessory to be installed under top units over open base cupboard.
- Stainless steel high splash guard on the rear and sides of cooking surface. Splash guard can be easily removed for cleaning.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Frontal simmering zone.
- Temperature range from 100° up to 280°C.
- Rough brushed chrome surface is highly resistant to scratches and facilitates cleaning operations at the end of the day.
- Scraper for smooth plate included as standard.
- Suitable for countertop installation.

#### Construction

- Cooking surface completely smooth.
- Cooking surface 12mm thick brushed chrome for optimum grilling results and ease of use.
- Q Mark model delivered with nozzles for G30-50 mbar.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

#### **Included Accessories**

• 1 of Scraper for smooth plate fry PNC 164255 tops

#### Optional Accessories

installation, 1600mm

Optional Accessories		
• Scraper for smooth plate fry tops	PNC 164255	
<ul> <li>Junction sealing kit</li> </ul>	PNC 206086	
<ul> <li>Draught diverter, 120 mm diameter</li> </ul>	PNC 206126	
<ul> <li>Matching ring for flue condenser, 120 mm diameter</li> </ul>	PNC 206127	
<ul> <li>Support for bridge type installation, 800mm</li> </ul>	PNC 206137	
<ul> <li>Support for bridge type installation, 1000mm</li> </ul>	PNC 206138	
<ul> <li>Support for bridge type installation, 1200mm</li> </ul>	PNC 206139	
<ul> <li>Support for bridge type installation, 1400mm</li> </ul>	PNC 206140	
<ul> <li>Support for bridge type</li> </ul>	PNC 206141	

#### APPROVAL:






# Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate

• Support for bridge type installation, 400mm	PNC 206154	
Chimney upstand, 400mm	PNC 206303	
Right and left side handrails	PNC 206307	
Back handrail 800 mm	PNC 206308	
• Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	
<ul> <li>Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)</li> </ul>	PNC 206346	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
• Kit G.25.3 (NI) gas nozzles for 700 fry	PNC 206466	
tops		
<ul> <li>Frontal handrail, 400mm</li> </ul>	PNC 216046	
• Frontal handrail, 800mm	PNC 216047	
Frontal handrail, 1200mm	PNC 216049	
• Frontal handrail, 1600mm	PNC 216050	
• Large handrail - portioning shelf, 400mm	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC 216277	
<ul> <li>Pressure regulator for gas units</li> </ul>	PNC 927225	





## Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate

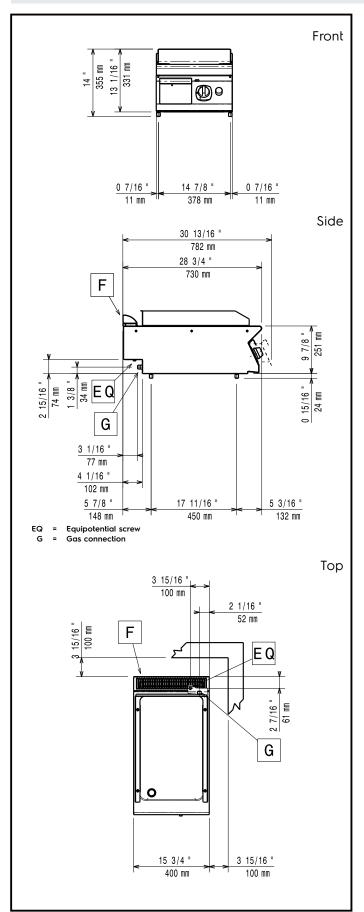

CE W UK

#### Gas

Gas Power: 7 kW

Standard gas delivery: G30 – 50 mbar Gas Type Option: G31 37 mbar Gas Inlet: 1/2"

### **Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Working Temperature MIN: 100 °C **Working Temperature MAX:** 280 °C External dimensions, Width: 400 mm External dimensions, Depth: 730 mm External dimensions, Height: 250 mm Net weight: 40 kg Shipping weight: 42 kg Shipping height: 530 mm Shipping width: 460 mm Shipping depth: 820 mm Shipping volume: 0.2 m<sup>3</sup> Cooking surface width: 330 mm Cooking surface depth: 540 mm

> Modular Cooking Range Line 700XP 400mm Gas Fry Top, Smooth Brushed Chrome Plate

