



Modular Cooking Range Line 900XP 4-Burner Gas Range 10 kW on Gas Oven

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



391577 (E9AALTBBMEI)

4-Burner (10 kW each) gas
Range on gas Oven (8,5
kW), Q Mark

Short Form Specification

Item No. _____

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. Delivered with nozzles for G30-50 mbar.

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- Four 10 kW high efficiency burners are equipped with continuous power regulation from 2.2 kW to 10 kW.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Oven thermostat adjustable from 120 °C to 280 °C.
- 40 mm thick oven door for heat insulation.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Q Mark model delivered with nozzles for G30-50 mbar.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐


APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

• Stainless steel oil filter for 18/23-litre fryer to remove particles of grease and food residuals) - 900XP	PNC 200086	☐	• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Junction sealing kit	PNC 206086	☐	• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Draught diverter, 150 mm diameter	PNC 206132	☐	• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Matching ring for flue condenser, 150 mm diameter	PNC 206133	☐	• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels	PNC 206135	☐	• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Flanged feet kit	PNC 206136	☐	• Kit town gas nozzles (G150) for 900 gas ranges on gas oven	PNC 206385	☐
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	☐	• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐	• Kit G.25.3 (NI) gas nozzles for 900 freestanding gas cookers on oven	PNC 206458	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐	• Side handrail-right/left hand (900XP)	PNC 216044	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐	• Frontal handrail, 800mm	PNC 216047	☐
• Pair of side kicking strips for concrete installation	PNC 206157	☐	• Frontal handrail, 1200mm	PNC 216049	☐
• Single burner smooth plate for direct cooking - fits frontal burners only	PNC 206171	☐	• Frontal handrail, 1600mm	PNC 216050	☐
• Single burner ribbed plate for direct cooking - fits frontal burners only	PNC 206172	☐	• 2 side covering panels for free standing appliances	PNC 216134	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐	• Large handrail - portioning shelf, 400mm	PNC 216185	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐	• Large handrail - portioning shelf, 800mm	PNC 216186	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐	• Pressure regulator for gas units	PNC 927225	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐			
• Pair of side kicking strips (not for refr-freezer base)	PNC 206180	☐			
• 2 panels for service duct for single installation	PNC 206181	☐			
• 2 panels for service duct for back to back installation	PNC 206202	☐			
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	☐			
• Water column with swivel arm (water column extension not included)	PNC 206289	☐			
• Water column extension for 900 line	PNC 206290	☐			
• Stainless steel double grid for 2 burners	PNC 206298	☐			
• Chimney upstand, 800mm	PNC 206304	☐			
• Back handrail 800 mm	PNC 206308	☐			
• Back handrail 1200 mm	PNC 206309	☐			
• Wok pan support for open burners (700/900)	PNC 206363	☐			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐			

Front

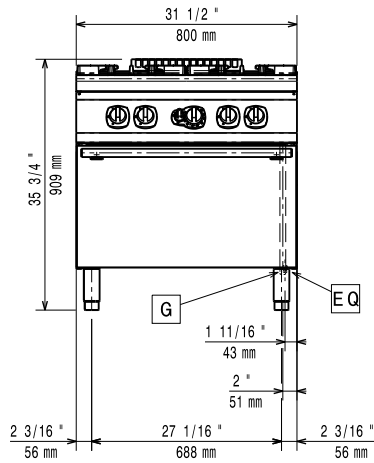


Side

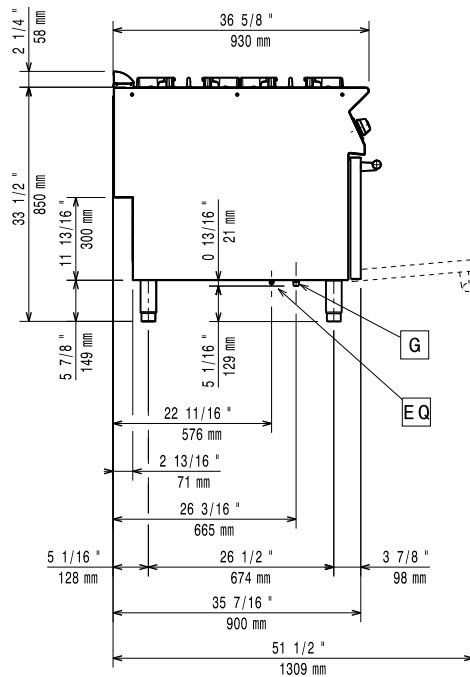

G = Gas connection

Top

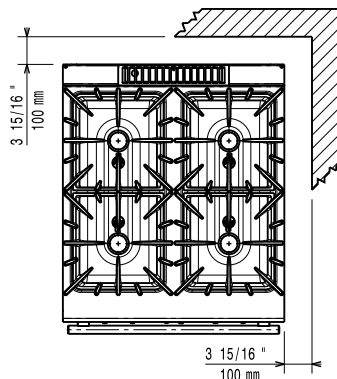

Gas

Gas Power:	48.5 kW
Standard gas delivery:	G30 - 50 mbar
Gas Type Option:	G31 37 mbar
Gas Inlet:	1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Oven working Temperature: 120 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width): 575 mm

Oven Cavity Dimensions (height): 300 mm

Oven Cavity Dimensions (depth): 700 mm

External dimensions, Width: 800 mm

External dimensions, Depth: 930 mm

External dimensions, Height: 850 mm

Net weight: 155 kg

Shipping weight: 137 kg

Shipping height: 1080 mm

Shipping width: 1020 mm

Shipping depth: 860 mm

Shipping volume: 0.95 m³

Front Burners Power: ISO 9001; ISO 14001 - ISO

Back Burners Power: 9001; ISO 14001 kW

Certification group: N9CG

Back Burners Dimension - mm Ø 100 Ø 100

Front Burners Dimension - mm Ø 100 Ø 100