

Warewashing  
Electric Personal Protective Equipment (PPE)  
Washer with electronic control, drain pump,  
detergent dispenser, high opening - Fire Brigade

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**506063 (EPPWEHGFB)**

Electric Personal Protective  
Equipment (PPE) Washer  
with electronic control, drain  
pump, detergent dispenser,  
high opening - Fire Brigade

### Short Form Specification

**Item No.** \_\_\_\_\_

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles. Built-in atmospheric, insulated water boiler (10,5 kW), 18-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 60°C. Boiler with 304 welding for protection against corrosion. Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar). High efficiency air gap (class A) in water inlet circuit to avoid water being syphoned back into the network as a result of a sudden drop in mains pressure.

Fault auto-diagnosis system. Self-cleaning cycle. Drain pump, rinse aid and detergent dispenser included.

Pre-arrangements for connection to an Energy Management device and to an automatic detergent dispenser.

Cell dimensions mm670x710x710h. Load capacity: n.3x1/1 GN or 3 trays mm600x800.

For front-feed loading. IPX5 water protection. Supplied with: n. 1 basket in stainless steel and n. 1 rack for containers and trays.

### Main Features

- Industrial cleaning machine to wash and sanitize protective personal equipments in steel, composite, rubber, fabric, plastic etc. from grease, residues of combustion gases, toxins etc. in just few minutes to save time and minimize contamination
- Door divided in two parts with 180° frontal opening for a better and easier load.
- Fault auto-diagnosis system. Self-cleaning cycle. Drain pump and detergent dispenser included.
- Pre-arrangements for connection to an automatic detergent dispenser.
- IPX5 water protection.
- Low noise level.
- Simple service from the front.

### Construction

- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Equipped with side washing arms in addition to upper and lower wash arms.

**APPROVAL:** \_\_\_\_\_



### Included Accessories


- 1 of Reinforced stainless steel basket for PNC 864394 pot&pan, 688mm

### Optional Accessories


- Filter for total demineralization PNC 864015
- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050
- Filter for total demineralization PNC 864367
- Reinforced stainless steel basket for pot&pan, 688mm PNC 864394



Front

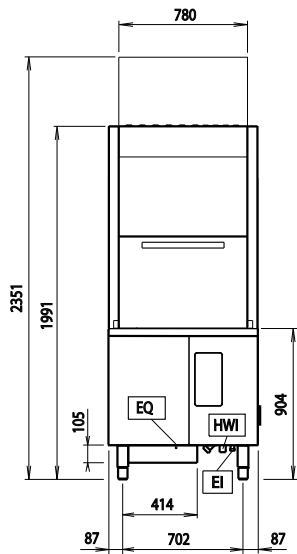


Side

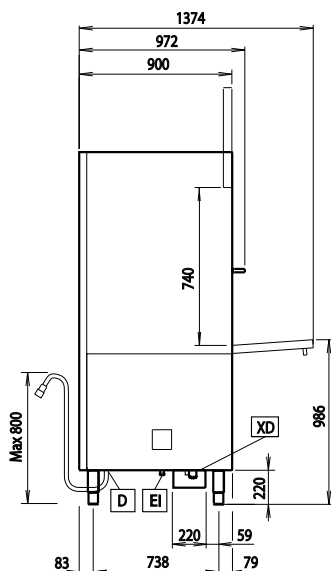

- D = Drain
- EI = Electrical inlet (power)
- EO = Electrical Outlet
- HWI = Hot water inlet
- XD = Detergent connection

Top



### Electric

#### Supply voltage:

506063 (EPPWEHGFB) 400 V/3N ph/50 Hz

#### Default Installed Power:

13 kW

#### Electrical power max.:

ISO 9001; ISO 14001 kW

#### Wash pump power:

2.5 kW

### Water:

#### Pressure, bar min/max:

0.5-7 bar

#### Washing tank capacity (lt):

95

#### Boiler Capacity (lt):

18

#### Washing cycle electrical elements:

7 kW

#### Hot rinse cycle duration

(sec.): ISO 9001; ISO 14001

### Key Information:

Washing cycle temperature: 55-65 °C

Hot rinse cycle temperature: 60 °C

N° of working cycles: 4 (180/360/540/inf)

Cell dimensions - width: 670 mm

Cell dimensions - depth: 710 mm

Cell dimensions - height: 740 mm

External dimensions, Width: 876 mm

External dimensions, Depth: 900 mm

External dimensions, Height: 1991 mm

Net weight: 216 kg

Shipping weight: 255 kg

Shipping height: 2230 mm

Shipping width: 1030 mm

Shipping depth: 1070 mm

Shipping volume: 2.46 m<sup>3</sup>

### Sustainability

Water supply temperature\*: 50 °C

Rinsing water consumption (per cycle): 7 lt