

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



371068 (E7FRGD1BF0)

7-It gas Fryer free standing with 1 "V" shape well (external burners), 1 basket and lid included

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 7 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on 50mm height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- High efficiency 7 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of Door for open base PNC 206350 cupboard
- 1 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

Junction sealing kit	PNC 206086 🗖
 Draught diverter, 120 mm diameter 	PNC 206126 🗅
 Matching ring for flue condenser, 120 mm diameter 	PNC 206127 □
 Flanged feet kit 	PNC 206136 🗆
 Frontal kicking strip for concrete installation, 400mm 	PNC 206147 □
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148 🗅
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150 🗖

APPROVAL:






Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter


Frontal kicking strip for concrete installation, 1200mm	PNC 206151	
Frontal kicking strip for concrete installation, 1600mm	PNC 206152	
 Frontal kicking strip, 400mm (not for refr-freezer base) 	PNC 206175	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178	
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179	
Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	
	PNC 206249	
 Pair of side kicking strips 		
 Pair of side kicking strips for concrete installation 	PNC 206265	
 Chimney upstand, 400mm 	PNC 206303	
Right and left side handrails	PNC 206307	
8	PNC 206308	
Back handrail 800 mm		_
 Flue condenser for 1/2 module, 120 mm diameter 	PNC 206310	
 Door for open base cupboard 	PNC 206350	
Base support for feet or wheels - 400mm (700/900)	PNC 206366	
Base support for feet or wheels - 800mm (700/900)	PNC 206367	
Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 600mm (700/900XP)	PNC 206373	
• Rear paneling - 800mm (700/900)	PNC 206374	
		_
• Rear paneling - 1000mm (700/900)	PNC 206375	
 Rear paneling - 1200mm (700/900) 	PNC 206376	
• Kit town gas nozzles (G150) for 700 grill	PNC 206389	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
Base support for feet or wheels - 600mm (700/900)	PNC 206431	
• Kit G.25.3 (NI) gas nozzles for 900 fryers	PNC 206467	
 2 side covering panels for free standing appliances 	PNC 216000	
Basket for 7lt top and free standing fryers	PNC 921608	
 Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers 	PNC 921693	
Pressure regulator for gas units	PNC 927225	






Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter





EQ = Equipotential screw
G = Gas connection

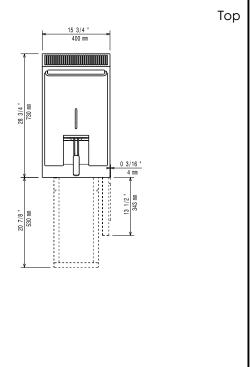

Gas

LPG Gas Pressure:

371068 (E7FRGD1BF0) 11" w.c. (27.7 mbar)

Gas Power: 7 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 235 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 5.5 lt MIN; 7 lt MAX
Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight:40 kgShipping weight:48 kgShipping height:1120 mmShipping width:460 mmShipping depth:820 mmShipping volume:0.42 m³Certification group:N7FG

Modular Cooking Range Line 700XP One Well Freestanding Gas Fryer 7 liter