# Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP Half Module Freestanding Gas Grill

371280 (E7JJASBAMCA)

Half module gas Grill free standing (AGA) - Aus

## **Short Form Specification**

### Item No.

To be installed on height adjustable feet in stainless steel. High efficiency 8 kW stainless steel gas burners with flame failure device, protected by deflection trays. Suitable for natural gas or LPG. Cooking surface grids in enameled cast iron, easily removable for cleaning. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

# Main Features

ITEM #

SIS #

AIA #

<u>MODEL #</u> NAME #

- Stainless steel burners with flame failure device.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Burners are protected by deflection trays to prevent fat dripping on them.
- Stainless steel high splash guard on the rear and sides can be easily removed for cleaning and is dishwasher-safe.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

## Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- IPx4 water protection.

### APPROVAL:



Мо	dulaı	<sup>r</sup> Cooking	g Range	Line
700XP	Half	Module	Freestan	ding
			Gas	Grill

Included Accessories			• 5
	PNC 206422		• •
			• [
Optional Accessories	DNIC 204094		0
Junction sealing kit	PNC 206086		•
• Draught diverter, 120 mm diameter	PNC 206126		• 2
Matching ring for flue condenser, 120     mm diameter	PNC 206127		(
• Kit 4 wheels - 2 swivelling with brake	PNC 206135		• [
- it is mandatory to install Base		_	• [
support and wheels		_	•
Flanged feet kit	PNC 206136		•
<ul> <li>Frontal kicking strip for concrete installation, 400mm</li> </ul>	PNC 206147		- 1
Frontal kicking strip for concrete	PNC 206148		• [
installation, 800mm		-	8
<ul> <li>Frontal kicking strip for concrete</li> </ul>	PNC 206150		• [
installation, 1000mm		_	
<ul> <li>Frontal kicking strip for concrete installation, 1200mm</li> </ul>	PNC 206151		
<ul> <li>Frontal kicking strip for concrete</li> </ul>	PNC 206152		
installation, 1600mm	1100 200102	-	
• Frontal kicking strip, 400mm (not for	PNC 206175		
refr-freezer base)		_	
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176		
<ul> <li>Frontal kicking strip, 1000mm (not for</li> </ul>	PNC 206177		
refr-freezer base)		-	
• Frontal kicking strip, 1200mm (not for	PNC 206178		
refr-freezer base)	DNIC 20/170		
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 200179		
Kit 4 feet for concrete installation	PNC 206210		
(not for 900 line free standing grill)			
<ul> <li>Pair of side kicking strips</li> </ul>	PNC 206249		
Pair of side kicking strips for	PNC 206265		
concrete installation	DNC 20/707		
Chimney upstand, 400mm	PNC 206303 PNC 206307		
<ul> <li>Right and left side handrails</li> <li>Back handrail 800 mm</li> </ul>	PNC 206307		
<ul> <li>Flue condenser for 1/2 module, 120</li> </ul>	PNC 206300		
mm diameter	FINC 200310		
• Base support for feet or wheels -	PNC 206366		
400mm (700/900)			
Base support for feet or wheels -     800mm (700 (200))	PNC 206367		
800mm (700/900) • Base support for feet or wheels -	PNC 206368		
1200mm (700/900)	1100 200000	-	
• Base support for feet or wheels -	PNC 206369		
1600mm (700/900)		_	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370		
<ul> <li>Rear paneling - 600mm (700/900XP)</li> </ul>	PNC 206373		
<ul> <li>Rear paneling - 800mm (700/900)</li> </ul>	PNC 206374		
• Rear paneling - 1000mm (700/900)	PNC 206375		
• Rear paneling - 1200mm (700/900)	PNC 206376		
• Kit town gas nozzles (G150) for 700	PNC 206389		
grill		_	
• Stainless steel grids for free standing wide grills (700XP)	PNC 206414		
<ul> <li>Stainless steel grids with drain shape</li> </ul>	PNC 206415		
for from the star aligner wind the second share a second			


 Stainless steel grids with drain shape PNC 206415
 for free standing wide top grills (700XP)

<ul> <li>Scraper for grids with drainage channels - top grills</li> </ul>	PNC 206421	
<ul> <li>Scraper for free standing grills</li> </ul>	PNC 206422	
<ul> <li>Base support for feet or wheels - 600mm (700/900)</li> </ul>	PNC 206431	
<ul> <li>Kit 6 wheels - 3 swivelling with brake</li> </ul>	PNC 206432	
<ul> <li>2 side covering panels for free standing appliances</li> </ul>	PNC 216000	
<ul> <li>Frontal handrail, 400mm</li> </ul>	PNC 216046	
<ul> <li>Frontal handrail, 800mm</li> </ul>	PNC 216047	
<ul> <li>Frontal handrail, 1200mm</li> </ul>	PNC 216049	
<ul> <li>Frontal handrail, 1600mm</li> </ul>	PNC 216050	
<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
<ul> <li>Pressure regulator for gas units</li> </ul>	PNC 927225	

Modular Cooking Range Line 700XP Half Module Freestanding Gas Grill


# **Electrolux**

# Modular Cooking Range Line 700XP Half Module Freestanding Gas Grill

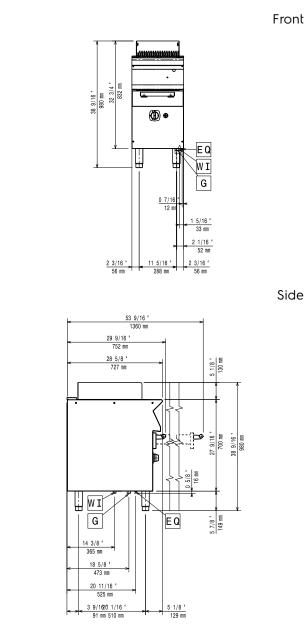

#### EQ Equipotential screw Gas connection =

G



Top

## Gas

Gas Power:

371280 (E7JJASBAMCA)	
Standard gas delivery:	
Gas Type Option:	
Gas Inlet:	

8 kW Natural Gas LPG;Town 3/4"

316 mm

478 mm

1180 mm 460 mm

810 mm

0.44 m<sup>3</sup>

40 kg

58 kg

## **Key Information:**

Cooking surface width:
Cooking surface depth:
Net weight:
Shipping weight:
Shipping height:
Shipping width:
Shipping depth:
Shipping volume:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group: N7GG

# Modular Cooking Range Line 700XP Half Module Freestanding Gas Grill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.