



Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Two Wells Freestanding Electric Fryer 7 liter

ITEM #

MODEL #

NAME #

SIS #

AIA #



371078 (E7FREH2BF0)

7+7-lt electric Fryer free standing with 2 "V" shape wells (external heating elements), 2 baskets and lids included

371141 (E7FREH22FN)

7+7-lt electric Fryer free standing with 2 "V" shape wells (external heating elements), 2 baskets and lids included

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency infrared heating elements (10.8kW) attached to the outside of the well. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Melting function to safely heat-up solid shortening used to fry products. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on height adjustable feet in stainless steel.
- Deep drawn V-Shaped wells.
- High efficiency infrared heating elements are attached to the outside of the wells.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the wells.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.

Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

Included Accessories

- 2 of Door for open base PNC 206350 cupboard
- 2 of Basket for 7lt top and free PNC 921608 standing fryers

Optional Accessories

- Junction sealing kit PNC 206086 ☐
- Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Support for bridge type installation, 1000mm (only for 371141) PNC 206138 ☐
- Support for bridge type installation, 1200mm (only for 371078) PNC 206139 ☐
- Frontal kicking strip for concrete installation, 800mm PNC 206148 ☐

APPROVAL:



Experience the Excellence
www.electroluxprofessional.com


• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	☐
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	☐
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	☐
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	☐
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	☐
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	☐
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	☐
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210	☐
• Pair of side kicking strips	PNC 206249	☐
• Pair of side kicking strips for concrete installation	PNC 206265	☐
• Chimney upstand, 800mm (only for 371078)	PNC 206304	☐
• Right and left side handrails	PNC 206307	☐
• Back handrail 800 mm	PNC 206308	☐
• Door for open base cupboard	PNC 206350	☐
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	☐
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	☐
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	☐
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	☐
• Rear paneling - 800mm (700/900)	PNC 206374	☐
• Rear paneling - 1000mm (700/900)	PNC 206375	☐
• Rear paneling - 1200mm (700/900)	PNC 206376	☐
• Chimney grid net, 400mm (700XP/900)	PNC 206400	☐
• 2 side covering panels for free standing appliances	PNC 216000	☐
• Basket for 7lt top and free standing fryers	PNC 921608	☐
• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	☐




Electrolux
PROFESSIONAL

Modular Cooking Range Line 700XP Two Wells Freestanding Electric Fryer 7 liter

Front

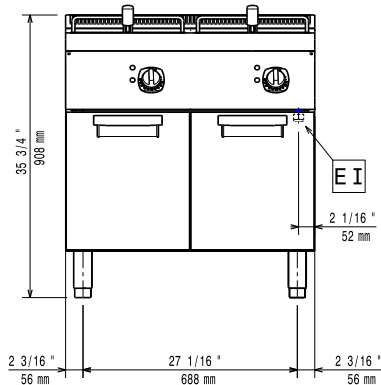


Side

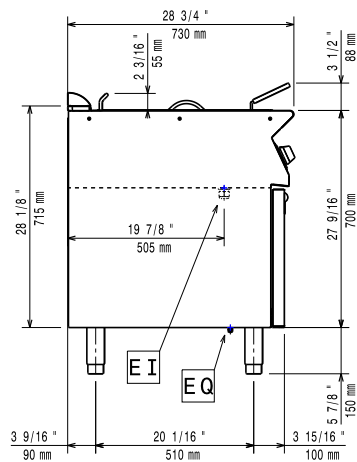

EI = Electrical inlet (power)
EQ = Equipotential screw

Top

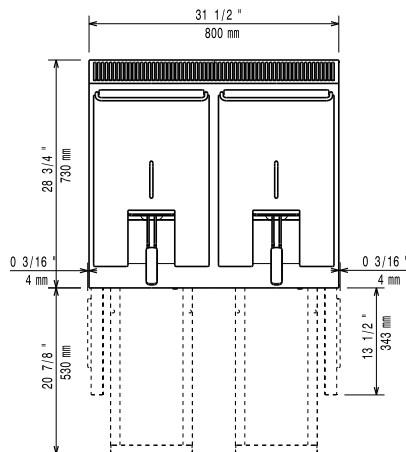

Electric

Supply voltage:

371078 (E7FREH2BF0)

380-400 V/3N ph/50-60 Hz

371141 (E7FREH22FN)

230 V/3 ph/50/60 Hz

Predisposed for:

Total Watts:

10.8 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions

(width):

240 mm

Usable well dimensions

(height):

235 mm

Usable well dimensions

(depth):

380 mm

Well capacity:

5.5 lt MIN; 7 lt MAX

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

69 kg

Shipping weight:

81 kg

Shipping height:

371078 (E7FREH2BF0)

1130 mm

371141 (E7FREH22FN)

1140 mm

Shipping width:

820 mm

Shipping depth:

860 mm

Shipping volume:

0.8 m³

Certification group:

371078 (E7FREH2BF0)

EFE72M07

371141 (E7FREH22FN)

N7FE2



Modular Cooking Range Line
700XP Two Wells Freestanding Electric Fryer 7 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.19