# Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP 4-Hot Square Plates Electric Boiling Top Electric Oven - Marine



371150 (E7ECMH4QE5)

4-Hot Square Plate (2,6 kW each) electric Range on electric Oven (6 kW) marine

## **Short Form Specification**

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. Four 2.6 kW square cast-iron hot plates hermetically sealed to the one-piece top. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

#### APPROVAL:

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

### **Main Features**

- The four 2.6kW cast-iron square plates are hermtically sealed to the one-piece top.
- Base compartment consists of an electric standard oven with thick oven door for heat insulation, positioned beneath the base plate.
- Electric oven to have separate thermostats for top and bottom heating elements.
- Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans).
- Ribbed enamelled steel oven base plate.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Oven thermostat adjustable from 100 °C to 300 °C.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

#### **Included Accessories**

• 1 of GN2/1 chrome grid for static PNC 164250 oven

#### **Optional Accessories**

- GN2/1 chrome grid for static PNC 164250 🗅 oven
- Junction sealing kit PNC 206086 🗅
- Kit 4 wheels 2 swivelling with brake - it is mandatory to install Base support and wheels
- Flanged feet kit PNC 206136 🗆
- Frontal kicking strip for concrete PNC 206148 installation, 800mm
- Frontal kicking strip for concrete PNC 206151 🗅 installation, 1200mm
- Frontal kicking strip for concrete PNC 206152 installation, 1600mm
- 2 cast iron plate bars for electric PNC 206168 🗅 cooking top
- Frontal kicking strip, 800mm (not PNC 206176 D for refr-freezer base)
- Frontal kicking strip, 1000mm (not PNC 206177 for refr-freezer base)
- Frontal kicking strip, 1200mm (not PNC 206178 for refr-freezer base)
- Frontal kicking strip, 1600mm (not PNC 206179 D) for refr-freezer base)



<ul> <li>Kit 4 feet for concrete installation (not for 900 line free standing grill)</li> </ul>	PNC 206210	
Pair of side kicking strips	PNC 206249	
<ul> <li>Pair of side kicking strips for concrete installation</li> </ul>	PNC 206265	
• Water column with swivel arm (water column extension not included)	PNC 206289	
• Water column extension for 700 line	PNC 206291	
<ul> <li>Right and left side handrails</li> </ul>	PNC 206307	
<ul> <li>Back handrail 800 mm</li> </ul>	PNC 206308	
<ul> <li>Base support for feet or wheels - 800mm (700/900)</li> </ul>	PNC 206367	
<ul> <li>Base support for feet or wheels - 1200mm (700/900)</li> </ul>	PNC 206368	
<ul> <li>Base support for feet or wheels - 1600mm (700/900)</li> </ul>	PNC 206369	
<ul> <li>Base support for feet or wheels - 2000mm (700/900)</li> </ul>	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
<ul> <li>Chimney grid net, 400mm (700XP/900)</li> </ul>	PNC 206400	
<ul> <li>2 side covering panels for free standing appliances</li> </ul>	PNC 216000	
Frontal handrail, 1200mm	PNC 216049	
<ul> <li>Frontal handrail, 1600mm</li> </ul>	PNC 216050	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
• Full size basket (220x350x240) for	PNC 921611	


 Full size basket (220x350x240) for pasta cookers - 700XP and EMPower



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Electrolux PROFESSIONAL

## Modular Cooking Range Line 700XP 4-Hot Square Plates Electric Boiling Top Electric Oven - Marine

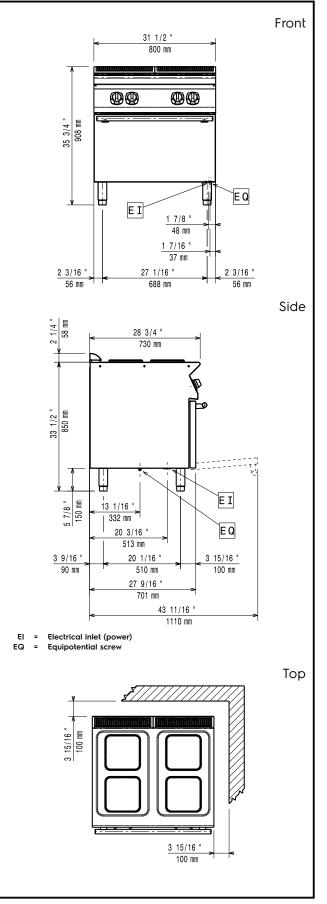

CE

DNV-GL

Electric	
Supply voltage: Electrical power, max:	400 V/3 ph/50/60 Hz 16.4 kW
Key Information:	
Oven Heat Input: Oven working Temperature:	6 kW 100 °C MIN; 300 °C MAX
Oven Cavity Dimensions (width):	540 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	650 mm
External dimensions, Width:	800 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	850 mm
Net weight:	80 kg
Certification group:	N7CE1
Front Plates Power:	2.6 - 2.6 kW
Back Plates Power:	2.6 - 2.6 kW
Front Plates dimensions:	230x230 230x230
<b>Back Plates dimensions:</b>	230x230 230x230
Waterproof index:	IPX4

Modular Cooking Range Line 700XP 4-Hot Square Plates Electric Boiling Top Electric Oven - Marine

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.