



## Digital Cabinets Roll-Through Compact Refrigerator 750 lt - 1 Full, 1 Glass door

ITEM #  
MODEL #  
NAME #  
SIS #  
AIA #



725098 (RI075R2FGT)

1-full and 1-glass door Roll-through Refrigerator,  
750lt, +2+10°C, AISI 304,  
R290

### Main Features

- Ventilated cooling for optimal temperature distribution.
- Lift-up control panel to better access main components.
- Interior light and lockable door.
- Digital control panel with temperature display.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- One full door and one glass door.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Complies with main international certification bodies and is CE marked.
- Inner side protectors to protect the internal walls.
- Right hinged glass door.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

### Short Form Specification

#### Item No.

External and internal in AISI 304 stainless steel. Insulation thickness mm60. One right hinged full door and one glass door with lock and internal light. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch; internal lighting. Operating temperature +2+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R290 gas in refrigeration circuit.

#### APPROVAL:



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

## Construction

- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Built-in compressor to suit operating conditions.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- External panels are in AISI 304 stainless steel for higher level of hygiene.

## User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

## Sustainability



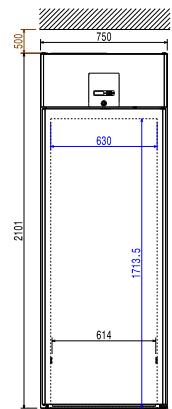
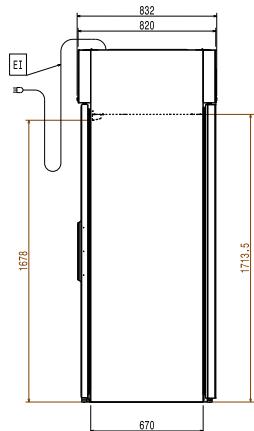
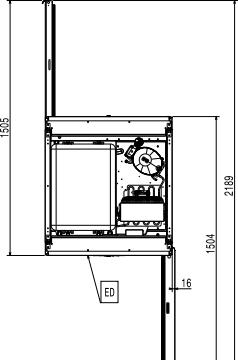
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.

## Optional Accessories

- Insulated floor-ramp for 750lt Roll-in PNC 881279   
Pass-through Refrigerator
- Ethernet connector for IR33 PNC 881299   
(CAREL) Refrigerated Cabinets and Counters
- Trolley 18x2/1GN for roll-in 750lt PNC 881521

## Recommended Detergents

- S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T PNC 0S2881
- S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity PNC 0S3257


**Front**

**Side**

**Top**
**Electric**

**Supply voltage:** 220-240 V/1 ph/50 Hz  
**Predisposed for:** 220-230 V 60 Hz

**Key Information:**

**Door hinges:**  
**External dimensions, Width:** 750 mm  
**External dimensions, Depth:** 832 mm  
**External dimensions, Height:** 2101 mm  
**Number and type of doors:** 2 Full;Glass  
**External side panels:** 304 AISI  
**External top panels:** 304 AISI  
**External door material:** Glass  
**Internal panels material:** 304 AISI

**Refrigeration Data**

**Operating temperature min.:** 2 °C  
**Operating temperature max.:** 10 °C  
**Compressor power:** 1/3 hp

**ISO Certificates**

**ISO Standards:** ISO 9001; ISO 14001; ISO 45001; ISO 50001

**Sustainability**

**Refrigerant type:** R290  
**Refrigeration power:** 520 W  
**Refrigerant weight (unit 1):** 150 g

EI = Electrical inlet (power)