

## Digital Cabinets Roll-Through Refrigerator 1600 lt - 1 Full, 1 Glass door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**725103 (RI16R2FGT)**

 1-full and 1-glass door Roll-in  
 Pass-through Refrigerator  
 1600lt, +2+10°C, AISI 304,  
 R290

### Short Form Specification

#### Item No. \_\_\_\_\_

External and internal in AISI 304 stainless steel. Body insulation thickness mm75. N. 1 full door and N. 1 glass door with heated frame and internal lighting. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost; external digital temperature display. Operating temperature +2+10°C. For ambient temperatures up to 43 ° C. CFC and HCFC free. R290 gas in refrigeration circuit.

### Main Features

- Ventilated cooling for optimal temperature distribution.
- Lift-up control panel to better access main components.
- Interior light and lockable door.
- Digital control panel with temperature display.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- One full door and one glass door.
- Complies with main international certification bodies and is CE marked.
- Plug-in installation: 1 phase, 220/240V supply.
- Inner side protectors to protect the internal walls.
- Right hinged glass door.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

APPROVAL: \_\_\_\_\_

### Construction

- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- The whole interior cell is constructed of AISI 304 stainless steel with rounded corners for a better cleanability.

- Bakery/pastry trolley with rack holding 400x600mm grids for 20 GN 2/1 oven and blast chiller freezer, 80mm pitch (16 runners) PNC 922762 ☐
- Banquet trolley with rack holding 45 plates for 20 GN 1/1 oven and blast chiller freezer, 90mm pitch PNC 922763 ☐
- Banquet trolley with rack holding 116 plates for 20 GN 2/1 oven and blast chiller freezer, 66mm pitch PNC 922764 ☐

### User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).

### Sustainability




- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- 75 mm thick insulation, with cyclopentane injection for long-term insulation and energy saving.


### Optional Accessories

- Trolley with tray rack, 15 GN 1/1, 84mm pitch PNC 922683 ☐
- Trolley with tray rack, 15 GN 2/1, 84mm pitch PNC 922686 ☐
- Trolley with tray rack, 20 GN 1/1, 63mm pitch PNC 922753 ☐
- Trolley with tray rack, 16 GN 1/1, 80mm pitch PNC 922754 ☐
- Banquet trolley with rack holding 54 plates for 20 GN 1/1 oven and blast chiller freezer, 74mm pitch PNC 922756 ☐
- Trolley with tray rack 20 GN 2/1, 63mm pitch PNC 922757 ☐
- Trolley with tray rack, 16 GN 2/1, 80mm pitch PNC 922758 ☐
- Banquet trolley with rack holding 92 plates for 20 GN 2/1 oven and blast chiller freezer, 85mm pitch PNC 922760 ☐
- Bakery/pastry trolley with rack holding 600x400mm grids for 20 GN 1/1 oven and blast chiller freezer, 80mm pitch (16 runners) PNC 922761 ☐

Front

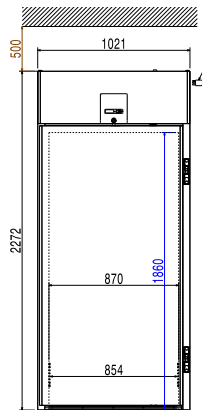


Side

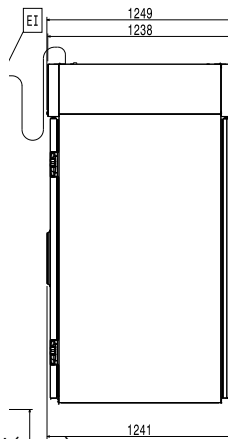

EI = Electrical inlet (power)

Top

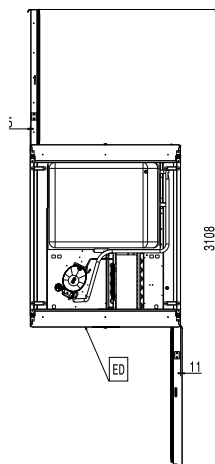

### Electric

Supply voltage: 220-240 V/1 ph/50 Hz

### Key Information:

#### Built-in Compressor and Refrigeration Unit

##### Door hinges:

External dimensions, Width: 1021 mm  
 External dimensions, Depth: 1249 mm  
 External dimensions, Height: 2272 mm  
 Number and type of doors: 2 Full;Glass  
 External side panels: 304 AISI  
 External top panels: 304 AISI  
 External door material: Glass;Stainless Steel AISI  
 Internal panels material: 304 AISI

### Refrigeration Data

Operating temperature min.: 2 °C  
 Operating temperature max.: 10 °C  
 Compressor power:

### ISO Certificates

ISO Standards: ISO 9001; ISO 14001; ISO 45001; ISO 50001

### Sustainability

Refrigerant type: R290  
 Refrigeration power: 546 W  
 Refrigerant weight (unit 1): 150 g