

## ecostore Premium 2 Door Digital Freezer, 1430lt (-22/-15) - R290 Class C

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**725485 (ESP142FFC)**

 2-door Freezer  
 1430lt, -22-15°C (R290),  
 digital, AISI 304, Class C

### Short Form Specification

#### Item No. \_\_\_\_\_

Two full door freezer entirely constructed in 304 AISI stainless steel with bottom panel in anti-corrosive material. Large digital display featuring cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads). HACCP-compliant control with alarms and history. Frost Watch Control to defrost only when required with automatic evaporation of defrost water. Optiflow: back to front forced air flow and removable air conveyors provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; Internal LED light. CFC and HCFC free. R290 gas in refrigeration circuit.

### Main Features

- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Performance guaranteed at ambient temperatures of +40°C (Climatic class 5).
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Optiflow: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions.
- Electrolux Professional Fridge Control APP make the life easier for our customers:
  - Monitor safety of preservation process thanks to HACCP data & alarms for precise control
  - Save time and easy data management having the possibility to send the HACCP information in excel format directly to e-mail address
  - Quick operations: set the cabinet temperature/turbocooling and set date/hour
- Easy serviceability thanks to the intuitive control panel with access via app.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to 30 days of event are kept in memory.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Rilsan coated grids for improved protection.
- Large digital white-digit display with cabinet temperature display and setting. Bluetooth technology included allows to keep HACCP historical data and download them through the app.
- Tropicalized unit.

### Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with rounded corners, pressed from a single sheet.
- The rounded internal corners, the easily removable runners, grids and air conveyors allow for ease of cleaning and high hygiene standards.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.

**APPROVAL:** \_\_\_\_\_

- Easy access to the main components for maintenance.
- Lockable door.

### Sustainability



- Frost Watch Control: fully automatic defrost starts only when ice is actually building-up in the evaporator and adapt the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- CFC and HCFC-free insulation.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Interior LED light to save energy and for best internal visibility.

### Included Accessories

- 6 of 2/1GN grey rilsan grid with 2 runners PNC 881020

### Optional Accessories


- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242 ☐
- Set of 8 GN1/1 PVC containers for fish PNC 880243 ☐
- Kit 20 pair runners and tray supports to fit pastry trays (400x600mm) PNC 880333 ☐
- Kit of 6 swivelling wheels, 2 with brake, diam 50 mm PNC 880340 ☐
- 1/1GN plastic container with false bottom PNC 880705 ☐
- 2/1GN grey rilsan grid PNC 881004 ☐
- 2/1GN aisi 304 stainless steel grid PNC 881016 ☐
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018 ☐
- 2/1GN grey rilsan grid with 2 runners PNC 881020 ☐
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers PNC 881021 ☐
- Pedal opening for 1430lt refrigerator PNC 881033 ☐
- 2/1GN pvc container with lid and 2 runners PNC 881039 ☐
- 2/1GN perforated shelf PNC 881042 ☐
- 1/1GN rilsan steel wire basket h=150mm PNC 881043 ☐
- 3 grey rilsan central grids for 1430lt (not for glass door) PNC 881044 ☐
- 2/1GN grey rilsan basket+2 runners h=150mm PNC 881047 ☐
- 5 swivelling wheels (2 with brake), diam 125mm, for 1430 lt refrigerators, NOT for remote models PNC 881294 ☐
- IoT module for refrigerated cabinets and counters PNC 881298 ☐
- POE switch PNC 922432 ☐




**Electrolux**  
PROFESSIONAL

## ecostore Premium 2 Door Digital Freezer, 1430lt (-22/-15) - R290 Class C

Front

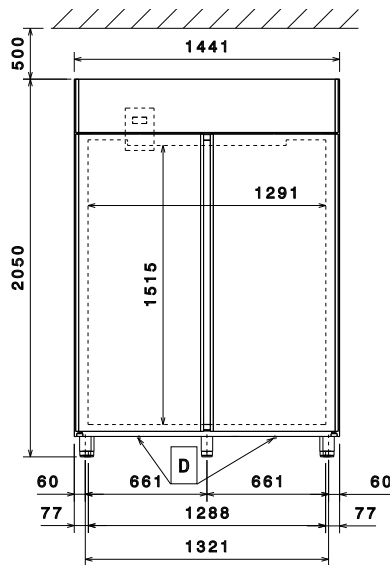


Side

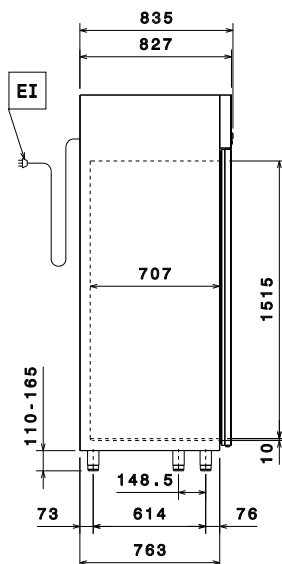

EI = Electrical inlet (power)

Top

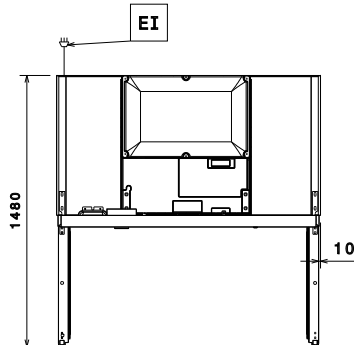

### Electric

Supply voltage: 220-240 V/1 ph/50 Hz  
Electrical power, max: 0.7 kW

### Capacity:

Number and type of grids (included): 6 - GN 2/1

### Key Information:

Net Volume: 1160 lt  
Door hinges:  
External dimensions, Width: 1441 mm  
External dimensions, Depth: 835 mm  
External dimensions, Depth with Doors Open: 1480 mm  
External dimensions, Height: 2050 mm  
Number and type of doors: 2 Full  
Type of external material: 304 AISI  
Type of internal material: 304 AISI  
Internal panels material: 304 AISI  
Number of positions & pitch: 44; 30 mm  
Gross capacity: 1430 lt  
Type of model (EU Regulation. 2015/1094): vertical frozen

### Refrigeration Data

Control type: Digital  
Refrigeration power at evaporation temperature: -30 °C  
Operating temperature min.: -22 °C  
Operating temperature max.: -15 °C  
Operating mode: Ventilated

### Sustainability

Refrigerant type: R290  
GWP Index: 3  
Refrigeration power: 947 W  
Energy Class (EU Reg. 2015/1094): C  
Yearly and daily energy consumption (EU Reg. 2015/1094): 3500kWh/year - ISO 9001; ISO 14001kWh/24h  
Climate class (EU Reg. 2015/1094): Heavy Duty (5)  
Energy Efficiency Index-EEI (EU Reg. 2015/1094): 48.69



ecostore Premium  
2 Door Digital Freezer, 1430lt (-22/-15) - R290 Class C

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.02



**Electrolux**  
PROFESSIONAL

## ecostore Premium 2 Door Digital Freezer, 1430lt (-22/-15) - R290 Class C



### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

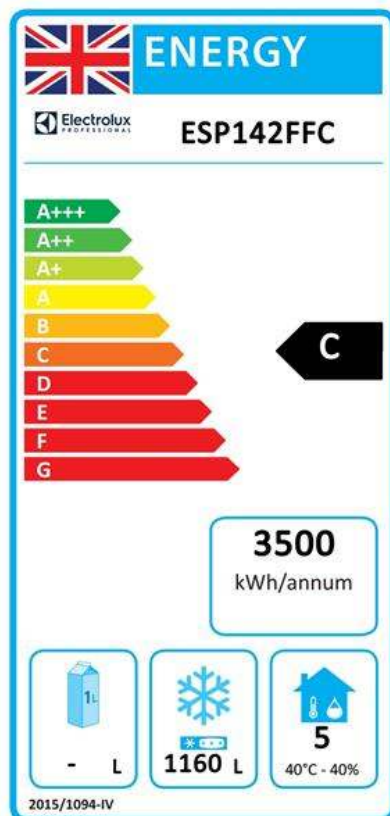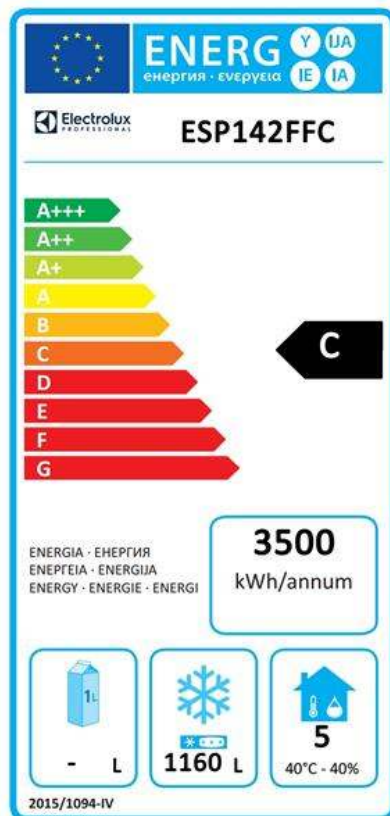

ecostore Premium  
2 Door Digital Freezer, 1430lt (-22/-15) - R290 Class C

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.02