

160 Line
Refrigerated Counter 160 lt -
undercounter glass door (grey) R600a

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


727789 (RUCR16G1V6)

1-glass door Undercounter Refrigerator 160lt, +2/+10°C, prepainted grey, R600a

Short Form Specification

Item No. _____

Grey painted reversible glass door with lock. Reversible handle. Top in grey ABS. Grey painted external sides. Interior in white High Impact Polystyrene with 30mm insulation. Inner cell with rounded corners. Door with removable "balloon" gasket. Built-in refrigeration unit; ventilated operating mode; automatic defrost; automatic evaporation of defrost water; electro-mechanical control; internal light. Temperature range +2°/+10°C at 32 °C ambient temperature. CFC and HCFC free insulation. R600a gas in refrigeration circuit. Gas in foam: Cyclopentane. IP23 protection.

Main Features

- Internal light and lockable door.
- Suitable for use in ambient temperatures of up to 32 °C.
- Refrigerators models have operating temperatures that can be adjusted from +2 to +10 °C to suit both meat and dairy storage requirements.
- Very quiet operation: noise level less than 45 dB (A).
- Automatic defrost and automatic evaporation of defrost water.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- The rounded internal corners, the easily removable grids allow for ease of cleaning and high hygiene standards.
- Reversible door.
- Built-in refrigeration unit.
- CFC and HCFC free (ecological refrigerant type: R600a).


Included Accessories

- 1 of Set of 3 grids for 160lt undercounter refrigerator, prepainted grey PNC 881209

Optional Accessories

- Rear wheel kit for 160lt for freestanding refrigerator and freezer PNC 880143
- Stacking kit for 160lt undercounter refrigerator, prepainted grey PNC 880146

APPROVAL: _____

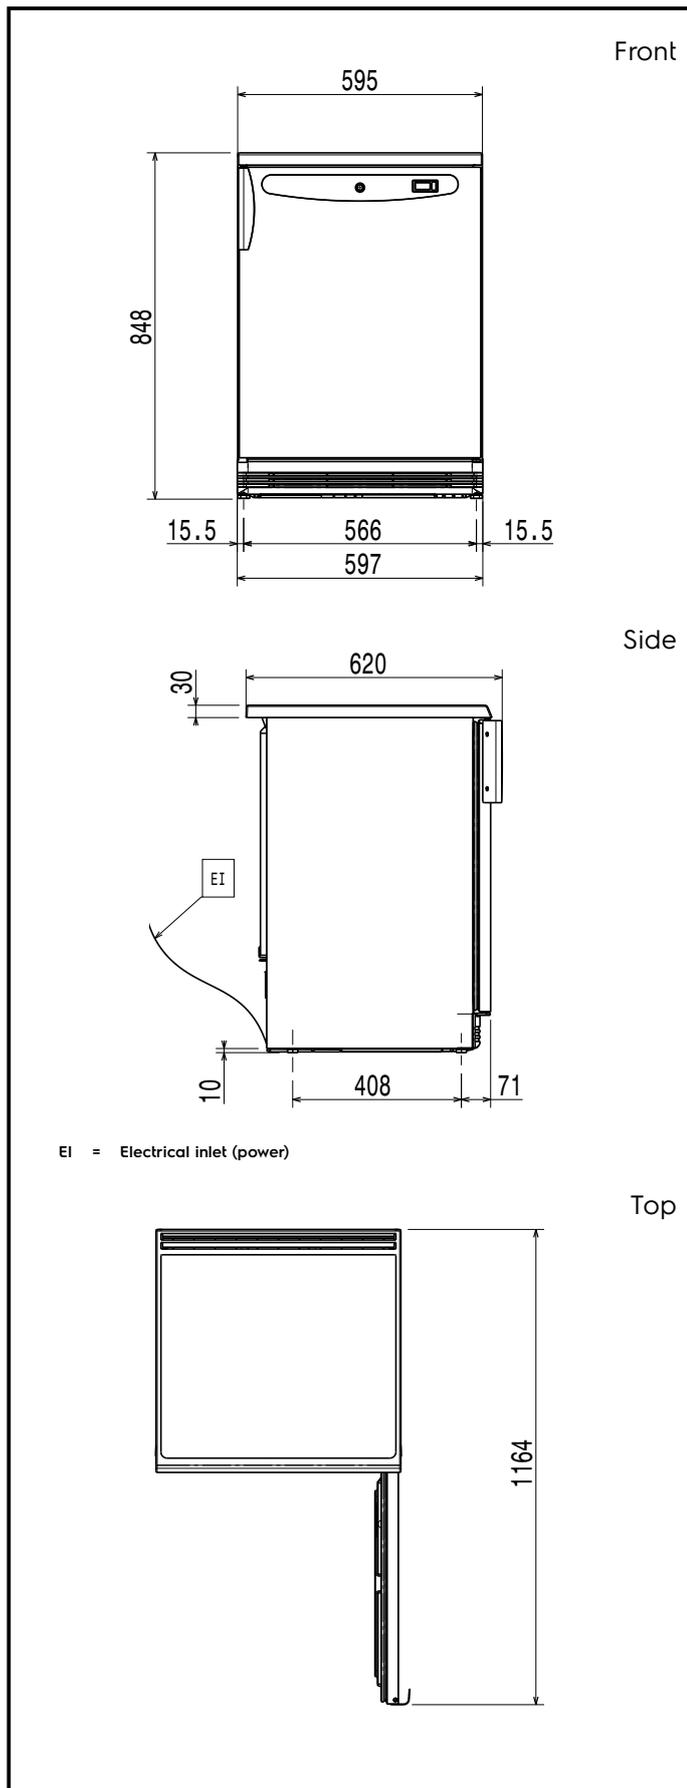

Electric

Supply voltage:	727789 (RUCR16G1V6)	220-240 V/1 ph/50 Hz
Electrical power max.:		0.11 kW

Key Information:

Gross capacity:	165 lt
Net Volume:	87 lt
External dimensions, Width:	600 mm
External dimensions, Depth:	637 mm
External dimensions, Height:	850 mm
Number and type of doors:	1 Glass
Height adjustment:	0/10 mm
Number and type of grids (included):	3 -
External side panels:	Prepainted Steel
External top panels:	Plastic
External door material:	Glass
Internal panels material:	High Impact White Polystyrene

Built-in Compressor and Refrigeration Unit

Refrigeration Data


Control type:	Mechanical
Refrigeration power at evaporation temperature:	-12 °C
Operating temperature min.:	2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

Product Information (EU Regulation 2015/1094)

Type of model (EU Reg. 2015/1094):	counter chilled
------------------------------------	-----------------

Sustainability

Energy Class (EU Reg. 2015/1094):	B
Yearly and daily energy consumption (EU Reg. 2015/1094):	542kWh/year - 1kWh/24h
Climate class (EU Reg. 2015/1094):	Light Duty (cl.3)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	26,95
Noise level:	49 dBA
Refrigerant type:	R600a
GWP Index:	3
Refrigeration power:	168 W
Refrigerant weight:	28 g

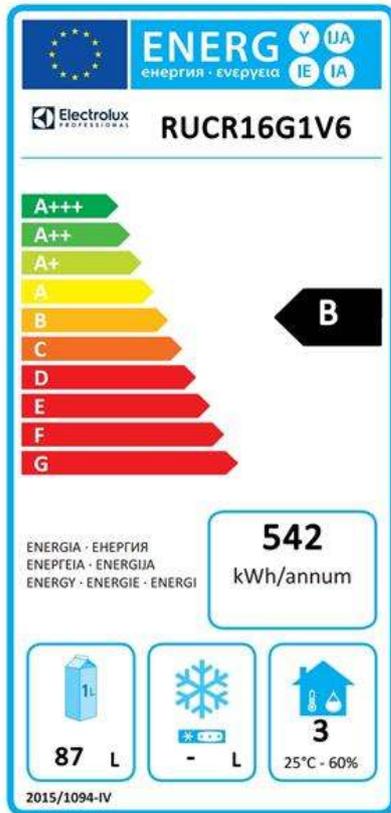

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

