


Ice Makers Ice Cuber (22gr), 47kg/24h, 20kg bin, air-cooled - drain pump

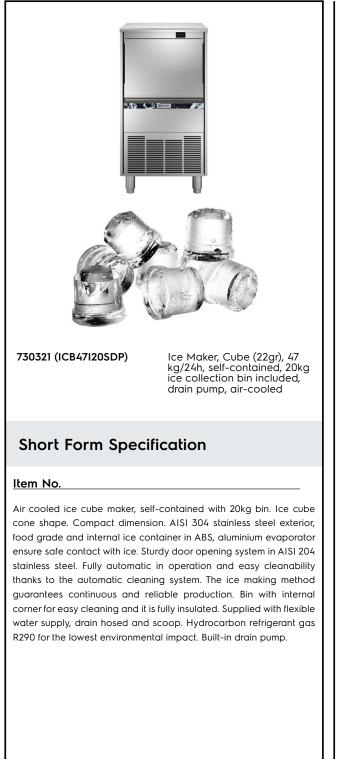

| ITEM #       |  |  |
|--------------|--|--|
| MODEL #      |  |  |
| NAME #       |  |  |
| <u>SIS #</u> |  |  |
| AIA #        |  |  |

#### **Main Features**

- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- The innovative anti-scale spray system with flexible nozzles avoids limescale deposits through small vibrations.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Ice cube cone shape.
- Fully automatic in operation.
- Rounded internal corners of the bin assure ease of cleaning.
- Food grade ABS interior.
- Bin included.
- Compliant to CE requirements for safety.

#### Construction

- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- AISI 304 stainless steel exterior.
- Aluminium evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.
- Internal ice containers in ABS.
- Hygienical plastic spray arms removable without the use of tools.
- Supplied with flexible water supply, drain hoses and scoop.
- Built-in drain pump.
- Easy access to the main components for maintenance.
- ON-OFF rocker switch.
- Adjustable 105-155mm feet.
- Plug as standard (schuko type).

APPROVAL:



### Sustainability




- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Reduced energy consumption by fully insulated storage bin.

## **Optional Accessories**

- Drain pump kit
- PNC 880690 • Kit of 4 small black feet, 13mm (0/+22mm) PNC 880692

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Electrolux PROFESSIONAL

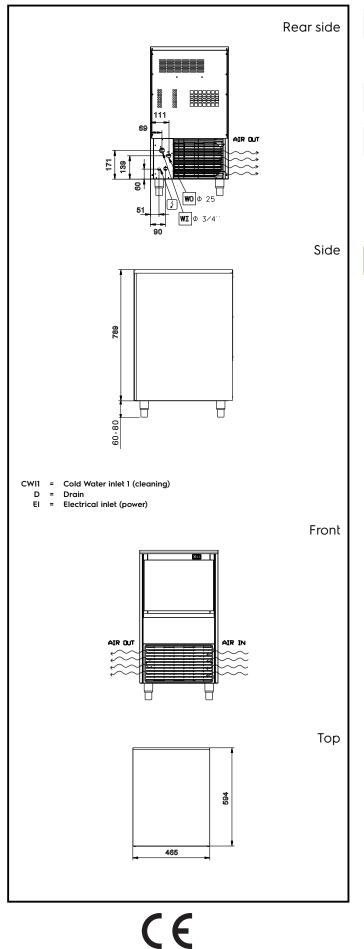

## Ice Makers Ice Cuber (22gr), 47kg/24h, 20kg bin, air-cooled - drain pump

| Electric |  |
|----------|--|
| 21004110 |  |

| Supply voltage:<br>730321 (ICB47120SDP)<br>Electrical power max.:   | 220-240 V/1N ph/50 Hz<br>0.44 kW                                  |  |
|---|---|--|
| Capacity:   |   |  |
| Bin capacity:   | ISO 9001; ISO 14001 kg  |  |
| Key Information:  |   |  |
| External dimensions, Width:<br>External dimensions, Depth:<br>External dimensions, Height:<br>Net weight:<br>Output:<br>Kind of cube: | 465 mm<br>595 mm<br>849 mm<br>45 kg<br>47 kg/day<br>Ice Cube 22 g |  |
| Sustainability  |   |  |
| Refrigerant type:<br>Refrigerant weight:<br>Water consumption:  | R290<br>70 g<br>5.3 lt/hr   |  |

Ice Makers Ice Cuber (22gr), 47kg/24h, 20kg bin, air-cooled - drain pump

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.