

# Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



391077 (E9FRGD1GF0)

15-It gas Fryer with 1 "V" shaped well (external burners), 1 basket and lid included

### **Short Form Specification**

#### Item No.

High efficiency 14 kW burners in stainless steel. Suitable for natural gas or LPG. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

#### **Main Features**

- Deep drawn V-Shaped well.
- High efficiency 14 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).
- Supplied as standard with 1 basket and 1 right side door for cupboard.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

#### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- IPX5 water resistance certification.

#### **Included Accessories**

<ul> <li>1 of Door for open base</li> </ul>	PNC 206350
cupboard	

• 1 of Full size basket for 14 and 15lt PNC 921691 free standing fryers

#### Optional Accessories

•	Junction sealing kit	PNC 206086	
•	Draught diverter, 120 mm diameter	PNC 206126	
•	Matching ring for flue condenser, 120 mm diameter	PNC 206127	
•	Flanged feet kit	PNC 206136	
•	Frontal kicking strip for concrete installation, 400mm	PNC 206147	
•	Frontal kicking strip for concrete installation, 800mm	PNC 206148	

#### APPROVAL:






## Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter


•	Frontal kicking strip for concrete installation, 1000mm	PNC 206150		• Deflector for floured products for 15lt fryers	PNC 921696
•	Frontal kicking strip for concrete installation, 1200mm	PNC 206151		Pressure regulator for gas units	PNC 927225
•	Frontal kicking strip for concrete installation, 1600mm	PNC 206152			
•	Pair of side kicking strips for concrete installation	PNC 206157			
•	Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175			
•	Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176			
•	Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177			
•	Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178			
•	Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179			
•	Pair of side kicking strips (not for refr- freezer base)	PNC 206180			
•	2 panels for service duct for single installation	PNC 206181			
•	2 panels for service duct for back to back installation	PNC 206202			
	Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210			
•	Sediment tray for 15lt fryers	PNC 206235			
•	Oil drain pipe for 15lt free standing fryer	PNC 206301			
•	Chimney upstand, 400mm	PNC 206303			
	Back handrail 800 mm	PNC 206308			
	Back handrail 1200 mm	PNC 206309			
	Flue condenser for 1/2 module, 120 mm diameter	PNC 206310	٥		
	Door for open base cupboard	PNC 206350			
	Base support for feet or wheels - 400mm (700/900)	PNC 206366	_		
•	Base support for feet or wheels - 800mm (700/900)	PNC 206367			
•	Base support for feet or wheels - 1200mm (700/900)	PNC 206368			
•	Base support for feet or wheels - 1600mm (700/900)	PNC 206369			
•	Base support for feet or wheels - 2000mm (700/900)	PNC 206370			
•	Rear paneling - 600mm (700/900XP)	PNC 206373			
	Rear paneling - 800mm (700/900)	PNC 206374			
	Rear paneling - 1000mm (700/900)	PNC 206375			
	Rear paneling - 1200mm (700/900)	PNC 206376			
	Chimney grid net, 400mm (700XP/900)	PNC 206400			
	Base support for feet or wheels - 600mm (700/900)	PNC 206431			
	Kit G.25.3 (NI) gas nozzles for 900 fryers	PNC 206467			
	2 side covering panels for free standing appliances				
	Full size basket for 14 and 15lt free standing fryers	PNC 921691			
	2 half size baskets for 14 and 15lt fryers	PNC 921692			
	Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	_		
•	Unclogging rod for 15lt fryers drainage pipe	PNC 921695			






## Modular Cooking Range Line 900XP One Well Gas Fryer 15 liter





EQ = Equipotential screw
G = Gas connection

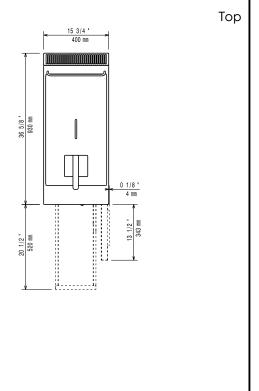

CE

#### Gas

Gas Power: 14 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG
Gas Inlet: 1/2"

#### **Key Information:**

Usable well dimensions

(width): 240 mm

Usable well dimensions

(height): 505 mm

Usable well dimensions

(depth): 380 mm

Well capacity: 13 lt MIN; 15 lt MAX
Thermostat Range: 120 °C MIN; 190 °C MAX

Net weight:50 kgShipping weight:65 kgShipping height:1080 mmShipping width:460 mmShipping depth:1020 mmShipping volume:0.51 m³Certification group:N9FG1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

