

Modular Cooking Range Line 900XP Half Module Gas PowerGrill Top HP

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



391219 (E9GRGDGC0P)

Half module gas PowerGrill

Short Form Specification

Item No.

To be used with natural or LPG gas. High efficiency 11 kW stainless steel burners with self stabilizing flame. Cooking surface grids in enameled cast iron, easily removable for cleaning. Stainless steel AISI 441 deflective shields below radiants avoid burner clogging. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by AISI441 stainless steel deflector reaching approx. 700°C; top and side radiant plates distribute evenly the heating power while protecting the deflector from direct contact with the dripping fat, thus reducing flare ups (PATENT US9591947B2 and related family).
- Cooking grid reaching temperatures up to 350°C.
- Full-depth grease collection drawer, with hole to indicate when full, to collect residual cooking grease and fat. Can be filled-up with water for vapor-emission effect.
- Stainless-steel removable splash guards on the rear and sides
- All components (deflector, radiant plates, cooking grids, splash guards) can be dismantled for cleaning purposes.
- "Power Control" exclusive function: control knob allows fine-tuning of the power on a 240° rotation range between max and min, to optimize consumption while perfectly adapting to the food being cooked.
- "Stand-by" position on the control knob allows minimizing power consumption during non-peak periods, while allowing a fast recovery at the moment of need.
- The special design of the control knob system guarantees against water infiltration.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

Construction

- Unit is 930 mm deep to give a larger working surface area
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Side and rear panel in AISI 304 stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All the functional components are accessible via the front of the appliance.

Optional Accessories

 Junction sealing kit 	PNC 206086	
 Support for bridge type installation, 800mm 	PNC 206137	
 Support for bridge type installation, 1000mm 	PNC 206138	
 Support for bridge type installation, 1200mm 	PNC 206139	
 Support for bridge type installation, 1400mm 	PNC 206140	
 Support for bridge type installation, 1600mm 	PNC 206141	

APPROVAL:






Modular Cooking Range Line 900XP Half Module Gas PowerGrill Top HP

 Support for bridge type installation, 400mm 	PNC 206154	
Chimney upstand, 400mm	PNC 206303	
Chimney upstand, 1000mm	PNC 206305	
Back handrail 800 mm	PNC 206308	
Back handrail 1200 mm	PNC 206309	
• Scraper kit with hooks for HP grills	PNC 206347	
• Side handrail-right/left hand (900XP)	PNC 216044	
• Frontal handrail, 400mm	PNC 216046	
• Frontal handrail, 800mm	PNC 216047	
• Frontal handrail, 1200mm	PNC 216049	
• Frontal handrail, 1600mm	PNC 216050	
 Large handrail - portioning shelf, 400mm 	PNC 216185	
 Large handrail - portioning shelf, 800mm 	PNC 216186	
Pressure regulator for gas units	PNC 927225	





Modular Cooking Range Line 900XP Half Module Gas PowerGrill Top HP

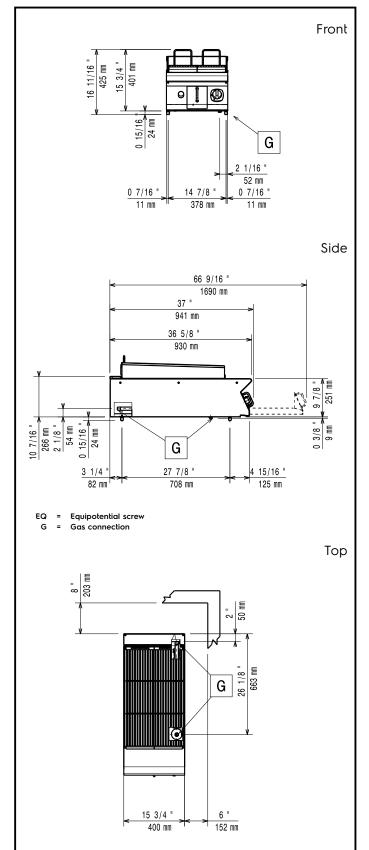

Gas

Gas Power: 10.5 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG; Natural Gas

Gas Inlet: 3/4"

Key Information:

External dimensions, Width: 400 mm 930 mm External dimensions, Depth: External dimensions, Height: 250 mm Net weight: 60 kg Shipping weight: 65 kg Shipping height: 580 mm Shipping width: 460 mm Shipping depth: 1020 mm Shipping volume: 0.27 m³ Certification group: N9EGG Cooking surface width: 371 mm Cooking surface depth: 644 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

