

ITEM #	
MODEL #	
MODEL #	
NAME #	
616	
SIS #	
AIA#	



391269 (E9GRTHGCFU)

Full module gas Grill free standing - town gas

#### **Short Form Specification**

#### Item No.

To be used with natural or LPG gas. High efficiency 22 kW stainless steel burners with self stabilizing flame. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Rght-angled side edges to allow flush-fitting junction between units.

#### Main Features

- Stainless steel AISI441 burners with self stabilizing flame.
- Burners are protected by deflection trays to prevent fat dripping on them.
- Drip tray to collect residual cooking juices and fat
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softener food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

#### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

#### **Included Accessories**

 1 of Scraper for free standing PNC 206422 grills

#### **Optional Accessories**

concrete installation, 1200mm

<ul> <li>Junction sealing kit</li> </ul>	PNC 206086 🗖
<ul> <li>Draught diverter, 150 mm diameter</li> </ul>	PNC 206132 🗖
<ul> <li>Matching ring for flue condenser, 150 mm diameter</li> </ul>	PNC 206133 □
<ul> <li>Flanged feet kit</li> </ul>	PNC 206136 🗖
<ul> <li>Frontal kicking strip for concrete installation, 800mm</li> </ul>	PNC 206148 □
<ul> <li>Frontal kicking strip for concrete installation, 1000mm</li> </ul>	PNC 206150 □
<ul> <li>Frontal kicking strip for</li> </ul>	PNC 206151 🗖

#### APPROVAL:





Frontal kicking strip for concrete	PNC 206152	
installation, 1600mm		
<ul> <li>Pair of side kicking strips for concrete installation</li> </ul>	PNC 206157	
<ul> <li>Frontal kicking strip, 800mm (not for refr-freezer base)</li> </ul>	PNC 206176	
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	
<ul> <li>Frontal kicking strip, 1200mm (not for refr-freezer base)</li> </ul>	PNC 206178	
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	
<ul> <li>Pair of side kicking strips (not for refr-freezer base)</li> </ul>	PNC 206180	
2 panels for service duct for single installation	PNC 206181	
2 panels for service duct for back to back installation	PNC 206202	
<ul> <li>Kit 4 feet for concrete installation (not for 900 line free standing grill)</li> </ul>	PNC 206210	
• Flue condenser for 1 module, 150 mm diameter	PNC 206246	
Water filling tap for free standing grills	PNC 206281	
Chimney upstand, 800mm	PNC 206304	
Back handrail 1200 mm	PNC 206309	
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
<ul> <li>Base support for feet or wheels - 2000mm (700/900)</li> </ul>	PNC 206370	
• Rear paneling - 800mm (700/900)	PNC 206374	
• Rear paneling - 1000mm (700/900)	PNC 206375	
• Rear paneling - 1200mm (700/900)	PNC 206376	
<ul> <li>Chimney grid net, 200mm (700XP/900)</li> </ul>	PNC 206399	
<ul> <li>Stainless steel grid for free standing grills (900XP)</li> </ul>	PNC 206404	
<ul> <li>Stainless steel grid with drainage channels for free standing V- shaped grills (900XP)</li> </ul>	PNC 206405	
Scraper for grids with drainage channels - top grills	PNC 206421	
Scraper for free standing grills	PNC 206422	
<ul> <li>Side handrail-right/left hand (900XP)</li> </ul>	PNC 216044	
• Frontal handrail, 800mm	PNC 216047	
• Frontal handrail, 1200mm	PNC 216049	
<ul> <li>Frontal handrail, 1600mm</li> </ul>	PNC 216050	
<ul> <li>2 side covering panels for free standing appliances</li> </ul>	PNC 216134	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	


Modular Cooking Range Line 900XP Full Module Town Gas Grill



• Pressure regulator for gas units PNC 927225 □





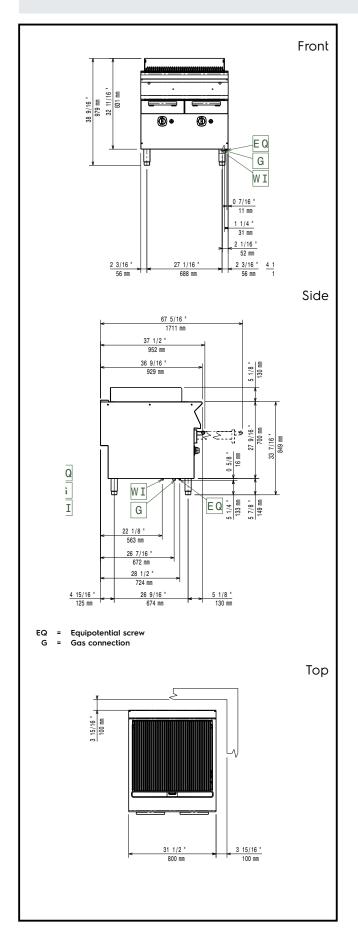

Modular Cooking Range Line 900XP Full Module Town Gas Grill



Gas

Gas Power: 20 kW

Natural Gas G20 (20mbar) Standard gas delivery: Gas Type Option: LPG;Town Gas

Gas Inlet: 3/4"

**Key Information:** 

External dimensions,

800 mm Width:

External dimensions,

930 mm Depth:

External dimensions,

Height: 850 mm Net weight: 96 kg Shipping weight: 113 kg Shipping height: 1040 mm Shipping width: 900 mm Shipping depth: 1060 mm Shipping volume: 0.99 m<sup>3</sup> Certification group: N9GT Cooking surface width: 631 mm Cooking surface depth: 640 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

