

## High Productivity Cooking Electric Rectangular Boiling Pan, 200lt Hygienic Profile, Backsplash + Tap

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**586531 (PBEN20EJEM)**

 Electric Boiling Pan 200lt (h),  
 rectangular with mixing tap,  
 GuideYou panel, backsplash

### Short Form Specification

#### Item No.

AISI 304 stainless steel construction. Deep drawn vessel in AISI 316 stainless steel. Insulated and counterbalanced lid. Water mixing unit included. Unit to include food tap. Food is uniformly heated via the base and the side walls of the pan by an indirect heating system using integrally generated saturated steam at a maximum temperature of 125°C in a jacket with an automatic deaeration system. Safety valve avoids overpressure of the steam in the jacket. Safety thermostat protects against low water level in the double jacket. TOUCH control panel. SOFT function. Possibility to store recipes in single or multiphase cooking process, with different temperature settings. Built in temperature sensors for precise control of cooking process. IPX6 water resistant. Configuration: Standing against a wall. Installation options (not included): floor mounted on 200mm high feet or a plinth which can be either steel or masonry construction.

### Main Features

- Kettle is suitable to boil, steam, poach, braise or simmer all kinds of produce.
- Square inner kettle allows working with stacked Gastronorm containers, which facilitate loading and unloading operations.
- Large capacity food tap enables safe and effortless discharging of contents.
- Isolated upper well rim avoids risk of harm for the user.
- Discharge tap is very easy to disassemble and clean.
- IPX6 water resistant.
- Built in temperature sensor to precisely control the cooking process.
- USB connection to easily update the software, upload/download recipes and download HACCP data.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory - contact the Company for more details).

### Construction

- Cooking vessel in 1.4435 (AISI 316L) stainless steel. Double-jacket in 1.4404 (AISI 316L) stainless steel designed to operate at a pressure of 1.5 bar.
- External panelling and internal frame made of 1.4301 (AISI 304) stainless steel.
- Safety valve avoids overpressure of the steam in the double jacket.
- 2" diameter discharge tap for rapid emptying of the well.
- Minimised presence of narrow gaps for easier cleaning of the sides to meet the highest hygiene standards.
- Integrated water mixing tap to make water filling and pan cleaning operations easier.
- Can be prearranged for energy optimisation or external surveillance systems (optional).
- GuideYou Panel - activated by the user via settings - to easily follow the multiphase recipes, granting a proper and controlled cooking and a better appliance optimization. The system will provide maintenance reminders, in line with ESSENTIA program, helping the user to properly take care of the product, avoiding downtimes.
- Highly-visible and bright led TOUCH control panel features user-friendly icons and intuitive self-explanatory command options. Display visualizes:
  - Actual and set temperature
  - Set and remaining cooking time
  - Pre-heating phase (if activated)

APPROVAL: \_\_\_\_\_

- GuideYou Panel (if activated)
- Deferred start
  - Soft Function to reach the target temperature smoothly
- 9 Power Control levels from simmering to fierce boiling
- Pressure mode (in pressure models)
- Stirrer ON/OFF settings (in round boiling models)
- Error codes for quick trouble-shooting
- Maintenance reminders

### Sustainability




- High-quality thermal insulation of the pan saves energy and keeps operating ambient temperature low.


### Optional Accessories

- |   |  |   |
|---|--|---|
| <ul style="list-style-type: none"> <li>• Strainer for dumplings for all tilting &amp; stationary braising and pressure braising pans (except 80lt) and for all stationary rectangular and 100lt round boiling pans PNC 910053 <input type="checkbox"/></li> <li>• Scraper for dumpling strainer for boiling and braising pans PNC 910058 <input type="checkbox"/></li> <li>• Base plate for 150 and 200lt rectangular boiling pans PNC 910182 <input type="checkbox"/></li> <li>• Suspension frame GN1/1 for rectangular boiling and braising pans PNC 910191 <input type="checkbox"/></li> <li>• Manometer kit for stationary boiling pans - long - factory fitted PNC 912120 <input type="checkbox"/></li> <li>• Power Socket, CEE16, built-in, 16A/400V, IP67, red-white - factory fitted PNC 912468 <input type="checkbox"/></li> <li>• Power Socket, CEE32, built-in, 32A/400V, IP67, red-white - factory fitted PNC 912469 <input type="checkbox"/></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP68, blue-white - factory fitted PNC 912470 <input type="checkbox"/></li> <li>• Power Socket, TYP23, built-in, 16A/230V, IP55, black - factory fitted PNC 912471 <input type="checkbox"/></li> <li>• Power Socket, TYP25, built-in, 16A/400V, IP55, black - factory fitted PNC 912472 <input type="checkbox"/></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP55, black - factory fitted PNC 912473 <input type="checkbox"/></li> <li>• Power Socket, CEE16, built-in, 16A/230V, IP67, blue-white - factory fitted PNC 912474 <input type="checkbox"/></li> <li>• Power Socket, TYP23, built-in, 16A/230V, IP54, blue - factory fitted PNC 912475 <input type="checkbox"/></li> <li>• Power Socket, SCHUKO, built-in, 16A/230V, IP54, blue - factory fitted PNC 912476 <input type="checkbox"/></li> <li>• Power Socket, TYP25, built-in, 16A/400V, IP54, red-white - factory fitted PNC 912477 <input type="checkbox"/></li> <li>• Measuring rod and strainer for 200lt stationary rectangular boiling pans PNC 912481 <input type="checkbox"/></li> <li>• Connecting rail kit for appliances with backsplash, 800mm PNC 912497 <input type="checkbox"/></li> <li>• Set of 4 feet for stationary units (height 200mm) - factory fitted PNC 912732 <input type="checkbox"/></li> <li>• Automatic water filling (hot and cold) for stationary units (width 700-1000mm): rectangular pressure boiling and braising pans - factory fitted PNC 912736 <input type="checkbox"/></li> <li>• Kit energy optimization and potential free contact - factory fitted PNC 912737 <input type="checkbox"/></li> <li>• Mainswitch 60A, 10mm<sup>2</sup> - factory fitted PNC 912774 <input type="checkbox"/></li> </ul> |  | <ul style="list-style-type: none"> <li>• External touch control device for stationary units - factory fitted PNC 912783 <input type="checkbox"/></li> <li>• Wall mounting kit for stationary units - factory fitted PNC 912787 <input type="checkbox"/></li> <li>• Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) PNC 912977 <input type="checkbox"/></li> <li>• Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) PNC 912978 <input type="checkbox"/></li> <li>• Rear closing kit for stationary units with backsplash - factory fitted PNC 912991 <input type="checkbox"/></li> <li>• Stainless steel plinth for stationary units - against the wall - factory fitted PNC 913345 <input type="checkbox"/></li> <li>• Kit endrail and side panels, flush-fitting, for installation with backsplash, left - factory fitted PNC 913378 <input type="checkbox"/></li> <li>• Kit endrail and side panels, flush-fitting, for installation with backsplash, right - factory fitted PNC 913379 <input type="checkbox"/></li> <li>• Kit endrail and side panel (12.5mm), for installation with backsplash, left - factory fitted PNC 913402 <input type="checkbox"/></li> <li>• Kit endrail and side panel (12.5mm), for installation with backsplash, right - factory fitted PNC 913403 <input type="checkbox"/></li> <li>• Drain standpipe for boiling pans (PBEN20/30/40 &amp; PPEN20/30) PNC 913429 <input type="checkbox"/></li> <li>• Connectivity kit for ProThermetic Boiling and Braising Pans ECAP - factory fitted PNC 913577 <input type="checkbox"/></li> </ul> |
|---|--|---|

Front

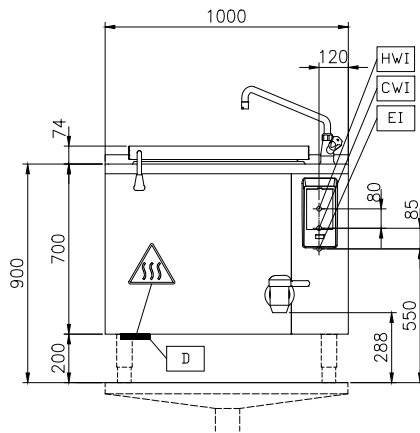


Side

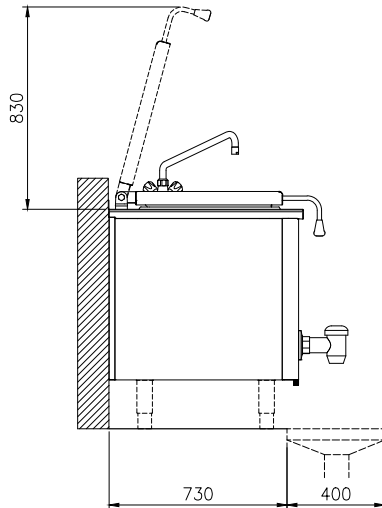

CWI = Cold Water inlet 1 (cleaning)  
 EI = Electrical inlet (power)  
 HWI = Hot water inlet

Top

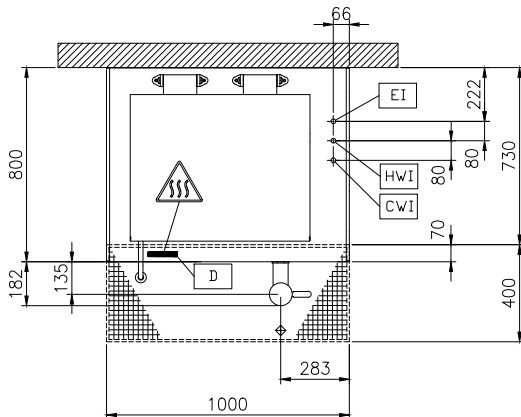

## Electric

### Supply voltage:

586531 (PBEN20EJEM)

400 V/3N ph/50/60 Hz

### Total Watts:

30.2 kW

## Installation:

### Type of installation:

 FS on concrete base; FS on  
 feet; On base; Standing  
 against wall; Wall mounted  
 (with wall-kit)

## Key Information:

### Configuration:

 Rectangular; Fixed; With  
 splashback

### Working Temperature MIN:

50 °C

### Working Temperature MAX:

110 °C

### Vessel (rectangle) width:

686 mm

### Vessel (rectangle) height:

571 mm

### Vessel (rectangle) depth:

556 mm

### External dimensions, Width:

1000 mm

### External dimensions, Depth:

800 mm

### External dimensions, Height:

700 mm

### Net weight:

200 kg

### Net vessel useful capacity:

200 lt

### Double jacketed lid:

✓

### Heating type:

Indirect