

## Warewashing Large Pot & Pan Washer with Drain Pump & Detergent Dispenser

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**506064**  
**(EPPWELGFB)** Electric Pot&Pan Washer with electronic control, drain pump, detergent dispenser

### Short Form Specification

**Item No.** \_\_\_\_\_

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles.

Built-in atmospheric, insulated water boiler (10,5 kW), 18-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 60°C. Boiler with 304 welding for protection against corrosion. Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar).

High efficiency air gap (class A) in water inlet circuit to avoid water being syphoned back into the network as a result of a sudden drop in mains pressure. Fault auto-diagnosis system. Self-cleaning cycle. Drain pump and detergent dispenser included.

Pre-arrangements for connection to an Energy Management device and to an automatic detergent dispenser. WRC compliant components.

Cell dimensions mm1340x710x570h.

Load capacity: n.6x1/1 GN.

For front-feed loading. IPX5 water protection.

Supplied with: n. 1 basket in stainless steel and n. 2 racks for containers and trays.

### Main Features

- Industrial cleaning machine to wash and sanitize protective personal equipments in steel, composite, rubber, fabric, plastic etc. from grease, residues of combustion gases, toxins etc. in just few minutes to save time and minimize contamination
- Door divided in two parts with 180° frontal opening for a better and easier load.
- Fault auto-diagnosis system. Self-cleaning cycle. Drain pump and detergent dispenser included.
- Pre-arrangements for connection to an automatic detergent dispenser.
- IPX5 water protection.
- Low noise level.
- Simple service from the front.

### Construction

- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Equipped with side washing arms in addition to upper and lower wash arms.


**APPROVAL:** \_\_\_\_\_

**Included Accessories**

- 2 of Extra rack for containers and trays PNC 864182
- 1 of Reinforced stainless steel basket for PNC 864395 pot&pan, 1351mm

**Optional Accessories**

- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050
- Extra rack for containers and trays PNC 864182
- Filter for total demineralization PNC 864367
- Reinforced stainless steel basket for pot&pan, 1351mm PNC 864395
- Kit for trays in Potwashers PNC 864471

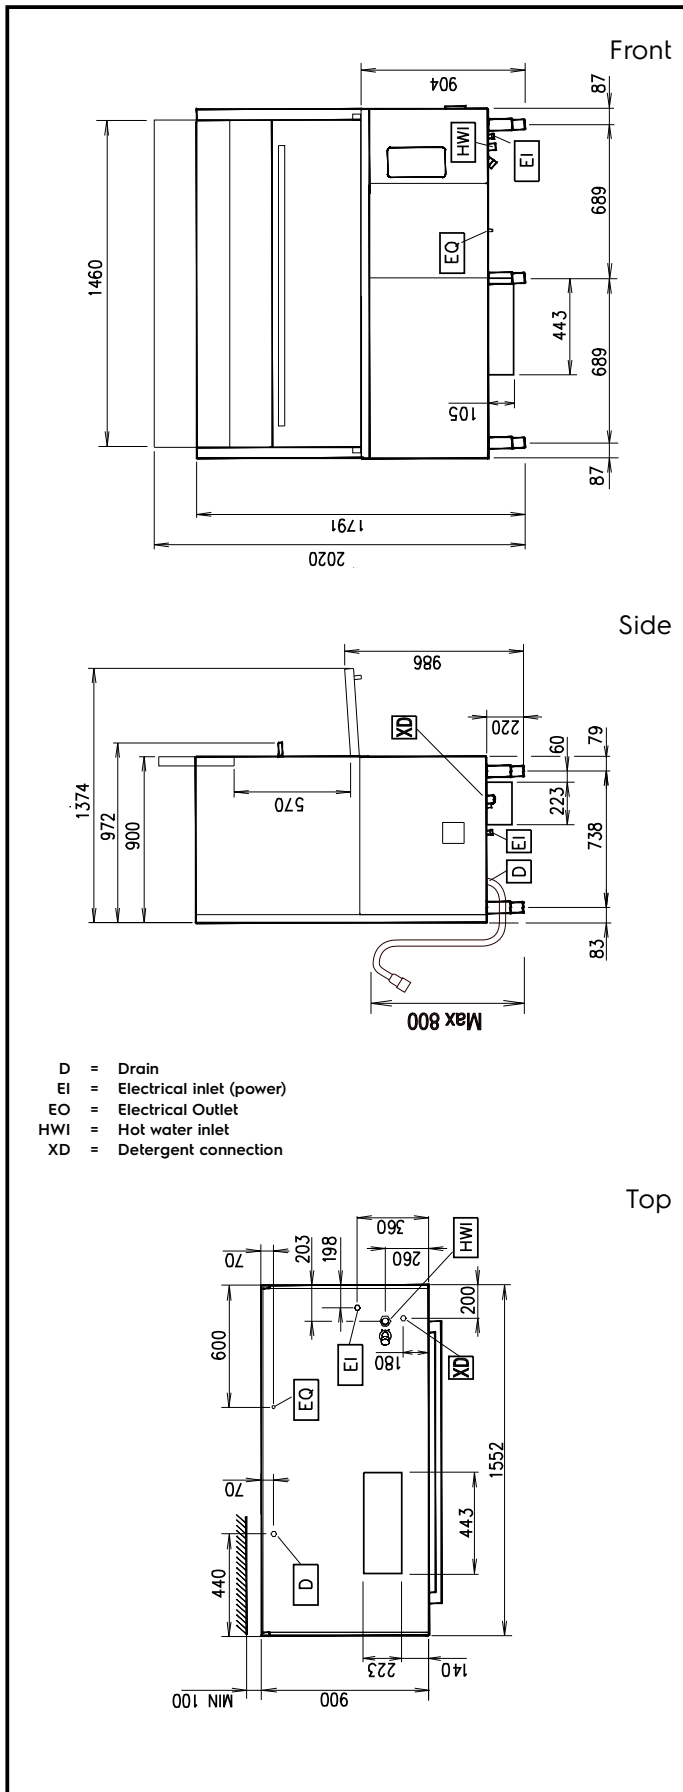

## Electric

<b>Supply voltage:</b>	506064 (EPPWELGFB)	400 V/3N ph/50 Hz
<b>Default Installed Power:</b>		17 kW
<b>Electrical power max.:</b>		26 kW
<b>Wash pump power:</b>		5 kW

## Water:

<b>Pressure, bar min/max:</b>	0.5-7 bar
<b>Washing tank capacity (lt):</b>	150
<b>Boiler Capacity (lt):</b>	18
<b>Washing cycle electrical elements:</b>	10,5 kW
<b>Hot rinse cycle duration (sec.):</b>	ISO 9001; ISO 14001

## Key Information:

<b>Washing cycle temperature:</b>	55-65 °C
<b>Hot rinse cycle temperature:</b>	60 °C
<b>N° of working cycles:</b>	4 (180/360/540/inf)
<b>Cell dimensions - width:</b>	1340 mm
<b>Cell dimensions - depth:</b>	710 mm
<b>Cell dimensions - height:</b>	570 mm
<b>External dimensions, Width:</b>	1552 mm
<b>External dimensions, Depth:</b>	900 mm
<b>External dimensions, Height:</b>	1791 mm
<b>Net weight:</b>	300 kg
<b>Shipping weight:</b>	380 kg
<b>Shipping height:</b>	2090 mm
<b>Shipping width:</b>	1770 mm
<b>Shipping depth:</b>	1130 mm
<b>Shipping volume:</b>	4.18 m <sup>3</sup>

## Sustainability

<b>Water supply temperature*:</b>	50 °C
<b>Rinsing water consumption (per cycle):</b>	12 lt