

Vacuum Packers

Mobile Vacuum Packer - 60 m³/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


600047 (EVP65F)

 Mobile Vacuum Packer - 60
 m³/h - 380 V/3/50

Short Form Specification

Item No. _____

Floor standing model on wheels. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 9 operating programs (including the external vacuum one). Mechanical "soft air" device allows the controlled re-admission of air into the chamber. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. 2 sealing bars: length 650mm each.

Main Features


- Digital control panel allows the selection of up to 9 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program: P1 to P8 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing) while P9, "external vacuum" is composed by only 2 selections (vacuum and extravacuum).
- To ensure simplicity of use and maximum reliability electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process.
- "Soft air" device allowing to control the re-admission of air into the chamber.
- Free-standing appliance mounted on 4 castors.
- Safety system protects the machine in case of sealing bar overheating.
- Equipped with 2 sealing bars.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Digital control panel allows programming and storing of up to 9 operating programs for a better vacuum pressure and heat seal times.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.

Construction


- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglass lid.
- Pressure chamber with rounded corners.

APPROVAL: _____

Front

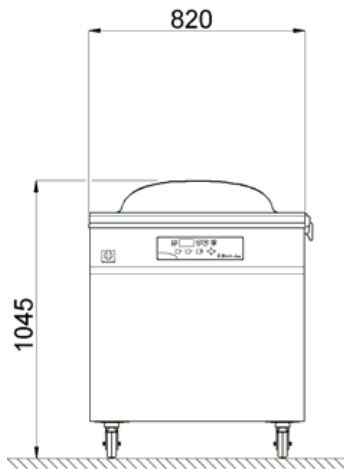


Side

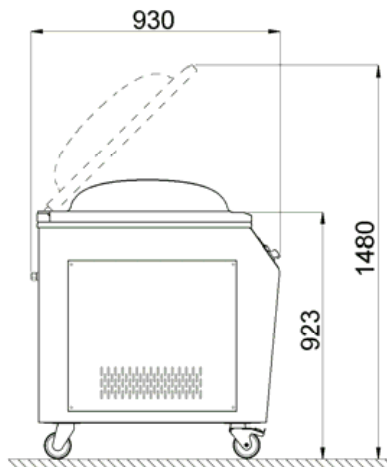

EI = Electrical inlet (power)

Other

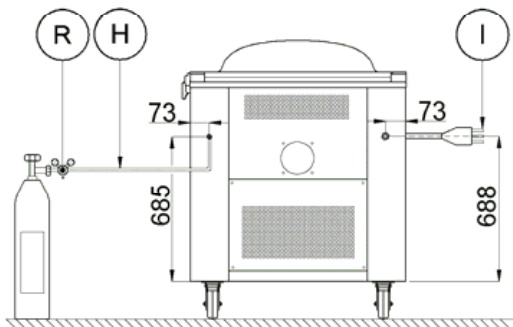

Electric

Supply voltage:

600047 (EVP65F)

380 V/3 ph/50 Hz

Total Watts:

2.5 kW

Key Information:

Pump:	60 m ³ /h
External dimensions, Width:	820 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	1050 mm
Chamber width:	720 mm
Chamber depth:	670 mm
Chamber height:	250 mm
Sealing bar length:	650 mm
Net weight (kg):	251