

Digital Cabinets

Roll-in Compact Refrigerator 750 lt - 1 door

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


726650 (R1075R1F)

 1-door roll-in Refrigerator
 750lt, 0+10°C, AISI 304

Short Form Specification

Item No.

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- One full door.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Inner side protectors to protect the internal walls.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction


- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Bottom panel with rounded internal corners avoids dirt traps.
- Refrigerant type: R134a.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K). CFC and HCFC-free insulation.

Optional Accessories


- Trolley 18x2/1GN for roll-in 750lt PNC 881521

APPROVAL: _____

Front

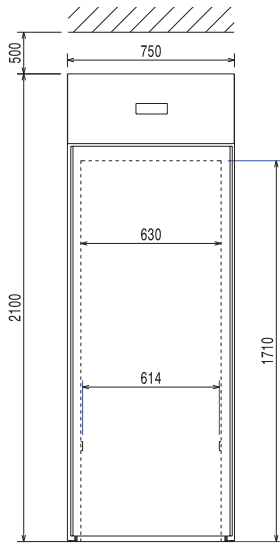


Side

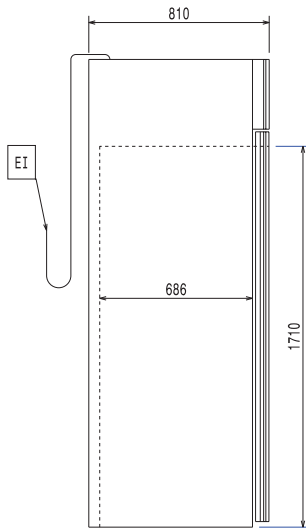

EI = Electrical inlet (power)

Top

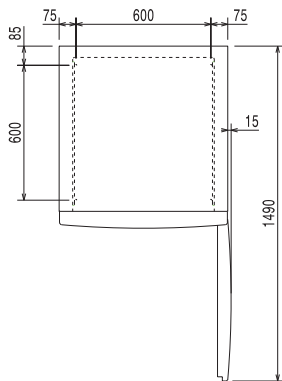

Electric

Supply voltage:

726650 (R1075R1F)

230 V/1 ph/50 Hz

Key Information:

| | |
|------------------------------|------------------|
| Door hinges: | Right Side |
| External dimensions, Width: | 750 mm |
| External dimensions, Height: | 2100 mm |
| Number and type of doors: | 1 Full |
| External side panels: | 304 AISI |
| External top panels: | Galvanized Steel |
| External door material: | 304 AISI |
| Internal panels material: | 304 AISI |

Refrigeration Data

| | |
|-----------------------------|--------|
| Compressor power: | 3/8 hp |
| Refrigerant type: | R134a |
| Refrigeration power: | 523 W |
| Refrigerant weight: | 260 g |
| Operating temperature min.: | 0 °C |
| Operating temperature max.: | 10 °C |