

## Vacuum Packers

### Vacuum packer 60m<sup>3</sup>/h on wheels

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



602183 (EVP60A)

Vacuum Packer, 60 m<sup>3</sup>/h, on wheels

### Short Form Specification

**Item No.** \_\_\_\_\_

Vacuum packer on wheels, made in 304 AISI stainless steel with domed transparent PMMA Plexiglas lid. Vacuum level control through high-precision sensor. Pressure chamber with rounded corners for easy cleaning. Digital control panel with 10 editable user programs (vacuum, extra vacuum, sealing time, gas percentage). External vacuum in bags or containers possible. Display shows alarm messages if malfunctions are detected (e.g. oil cleaning cycle needed). 3 PE filling plates included. Equipped with two sealing bars 620 mm each, on front/rear. Optional Bluetooth label printer available, for HACCP compliance.

### Main Features


- Vacuum packer on wheels with oil lubricated vacuum pump.
- Vacuum level control through high-precision sensor.
- Pressure chamber made of constant thickness, hydroformed, stainless steel with rounded corners for easy cleaning.
- Sturdy, transparent PMMA (plexiglass) lid with rounded edges; opens automatically at the end of the cycle.
- Control panel, resistant to liquids, humidity, dirt and dust.
- 10 editable user programs (vacuum, extra vacuum, sealing time, gas percentage).
- Adjustable sealing time 0.1 to 6 seconds.
- Specific pump oil cleaning cycle (H2Out).
- Automatic warnings if food needs cooling down (hot), failure in the packing process, gas missing, oil change.
- 3 PE filling plates included.
- Equipped with two sealing bars 620 mm each, on front/rear, easily removable for cleaning.
- With device to lift the removable sealing bar.
- Unit pre-arranged to be connected to an inert gas system.

### Construction


- Entirely constructed in 304 AISI stainless steel.
- Free-standing appliance mounted on 4 castors, 2 with brakes.
- Easily accessible oil drain.
- Chromed aluminium die-cast hinges.

APPROVAL: \_\_\_\_\_

Front




Side




EI = Electrical inlet (power)


Top



Other



Perspective

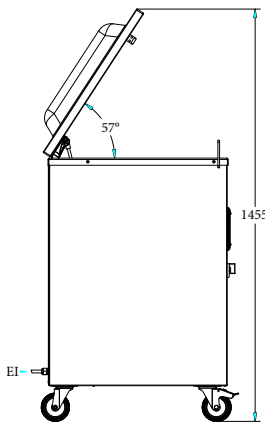

#### Electric

Supply voltage: 400 V/3N ph/50-60 Hz  
 Total Watts: 1.5 kW

#### Key Information:

Filling board nr: 3  
 Gas nozzles: 4+4  
 External dimensions, Width: 697 mm  
 External dimensions, Depth: 772 mm  
 External dimensions, Height: 1034 mm  
 Net weight (kg): 168.5  
 Well Capacity: 61 lt  
 Pump: 60 m<sup>3</sup>/h  
 Sealing bar position: Front+Rear  
 Sealing bar length: 620 mm  
 Max chamber (chamber + cover) dimensions: 536 x 650 x 200 mm  
 Chamber working dimensions: 430 x 545 x 130 mm