

Modular Cooking Range Line thermaline 90 - 100 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



589151 (MCNABBAOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 100 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860 2 with 20 mm drop nose top.

C	Optional Accessories			
	Connecting rail kit for appliances with backsplash, 900mm	PNC	912499	
	Folding shelf, 300x900mm		912581	
	Folding shelf, 400x900mm Fixed side shelf, 200x900mm		912582 912589	
	Fixed side shelf, 300x900mm		912590	
	Fixed side shelf, 400x900mm	PNC	912591	
•	Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC	912981	
•	Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC	912982	
•	Back panel, 100x700mm, for units with backsplash	PNC	913006	
•	Back panel, 100x800mm, for units with backsplash	PNC	913019	
•	Endrail kit, flush-fitting, with backsplash, left	PNC	913117	
•	Endrail kit, flush-fitting, with backsplash, right	PNC	913118	
•	Endrail kit (12.5mm) for thermaline 90 units with backsplash, left	PNC	913208	
•	Endrail kit (12.5mm) for thermaline 90 units with backsplash, right	PNC	913209	
•	U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)	PNC	913226	
	Insert profile d=900		913232	
•	Stainless steel side panel (12,5mm), 900x400mm, left side, wall mounted	PNC	913636	

APPROVAL:






Modular Cooking Range Line thermaline 90 - 100 mm Closed Work top, 1 Side with Backsplash

• Stainless steel side panel (12,5mm), 900x400mm, right side, wall mounted	PNC 913637	
 Stainless steel side panel, 900x400mm, flush-fitting, left side, wall mounted 	PNC 913638	
 Stainless steel side panel, 900x400mm, flush-fitting, right side, wall mounted 	PNC 913639	
 Additional wall mounting fixation - US 	PNC 913640	
 Wall mounting kit top - TL85/90 - Factory Fitted 	PNC 913645	



Modular Cooking Range Line thermaline 90 - 100 mm Closed Work top, 1 Side with Backsplash

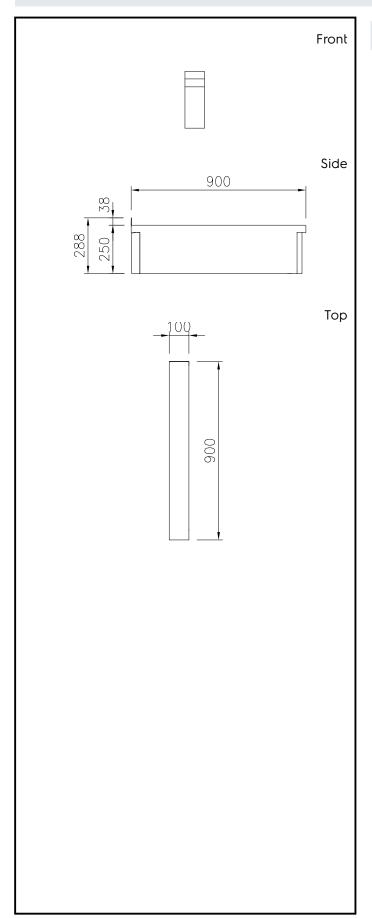

Key Information:

External dimensions, Width:

589151 (MCNABBAOOO)100 mmExternal dimensions, Depth:900 mmExternal dimensions, Height:250 mmNet weight:15 kg

Modular Cooking Range Line thermaline 90 - 100 mm Closed Work top, 1 Side with Backsplash