

## Refrigeration Equipment 3-Door Sandwich/Salad Prep Table 70" Long 18-1/6 Pan


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

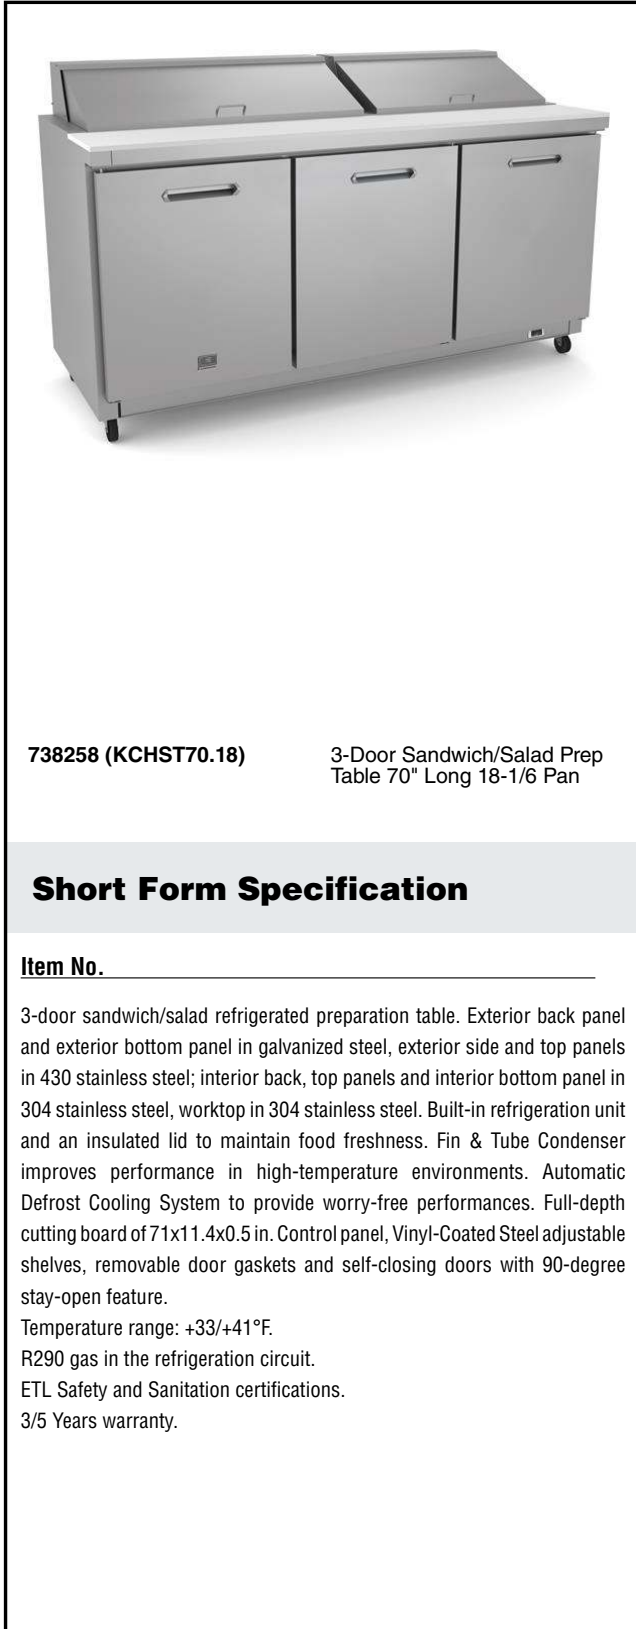

738258 (KCHST70.18)

3-Door Sandwich/Salad Prep  
Table 70" Long 18-1/6 Pan

### Short Form Specification

**Item No.** \_\_\_\_\_

3-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 71x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

### Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 18 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Drawer Kit for 48" Mega Top, Salad Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter PNC 880616
- Drawer Kit for Center Section of 70" Salad, Mega Top Prep Table & 72" Undercounter PNC 880699

APPROVAL: \_\_\_\_\_

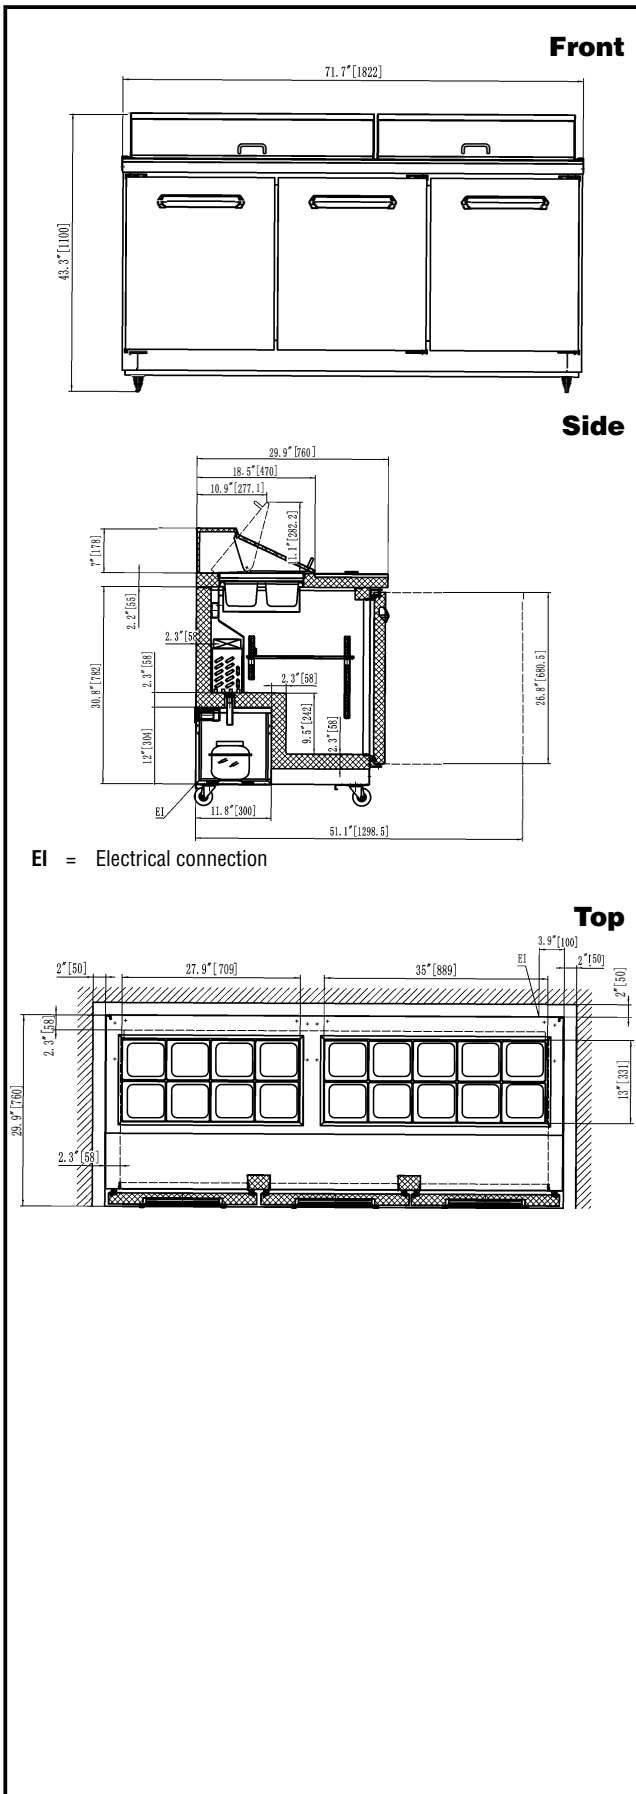

## Electric

<b>Supply voltage:</b>	738258 (KCHST70.18)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>		0.72 kW
<b>Plug type:</b>		NEMA 5-15

## Capacity:

<b>Gross capacity:</b>	18 cu.feet
<b>Number and type of grids (included):</b>	3 - 538x425/580x425

## Key Information:

<b>Door hinges:</b>	1 Left+2 Right
<b>External dimensions, Width:</b>	71 3/4" (1822 mm)
<b>External dimensions, Depth:</b>	29 15/16" (760 mm)
<b>External dimensions, Height:</b>	43 5/16" (1100 mm)
<b>Number and type of doors:</b>	3 Full
<b>Internal Dimensions (depth):</b>	23 13/16" / (605 mm)
<b>Internal Dimensions (height):</b>	23 1/2" / (597 mm)
<b>Internal Dimensions (width):</b>	66 7/16" / (1687 mm)
<b>Shipping height:</b>	47 1/4" (1200 mm)
<b>Shipping weight:</b>	443 lbs (201 kg)
<b>Shipping volume:</b>	63.12 ft <sup>3</sup> (1.79 m <sup>3</sup> )
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Current absorbed:</b>	4.3 Amps
<b>Compressor power:</b>	1/3 hp
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	95 g