

Refrigeration Equipment 1-Door Under Counter Freezer 27" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738265 (KCHUC27F)

1-Door Under Counter Freezer
27" Long

Short Form Specification

Item No. _____

1-door freezer counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature for units with serial number 24020014 or later. External temperature display.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445

APPROVAL: _____

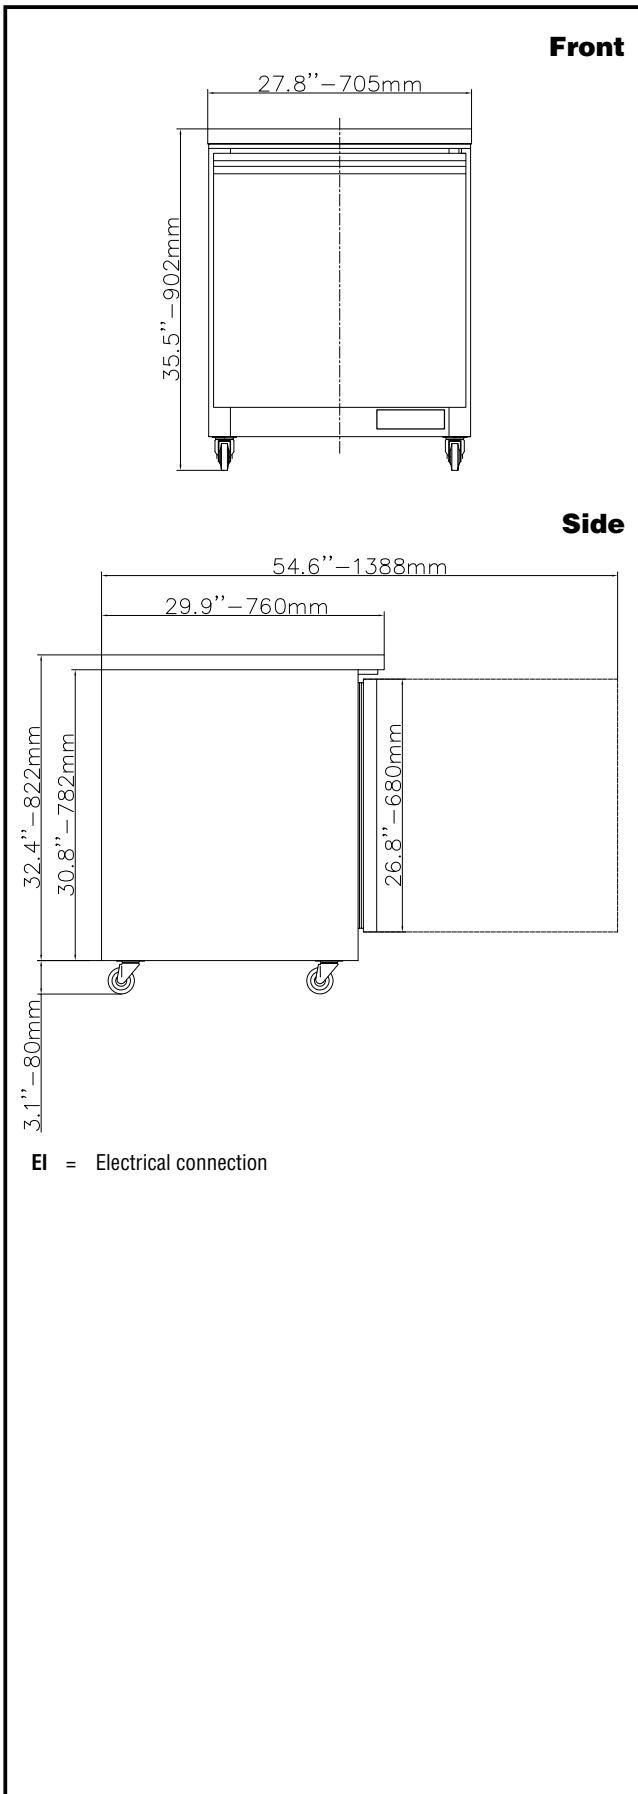

Electric

Supply voltage:	115 V/1 ph/60 Hz
738265 (KCHUC27F)	
Electrical power, max:	0.2 kW
Plug type:	USA NEMA 5-15P

Capacity:

Gross capacity:	6.5 cu.feet
------------------------	-------------

Key Information:

Door hinges:	Right Side
Capacity:	6.50004 cu.ft.
External dimensions, Width:	27 3/4" (705 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	35 1/2" (902 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	22 13/16" / (580 mm)
Internal Dimensions (height):	23 1/2" / (597 mm)
Internal Dimensions (width):	22 1/4" / (565 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	172 lbs (78 kg)
Shipping volume:	20.41 ft ³ (0.58 m ³)
Number and type of grids (included):	1 - Vinyl-Coated Steel
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years
Approvals	ETL C&US; ETL SANITATION

Refrigeration Data

Current absorbed:	1.9 Amps
Compressor power:	1/4 hp
Operating temperature min.:	-9.4 °F
Operating temperature max.:	8.6 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	95 g