

Refrigeration Equipment 3-Solid Door Back Bar Refrigerator Black 73" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738271 (KCHBB72S)

3-Solid Door Back Bar
Refrigerator Black 73" Long

Short Form Specification

Item No. _____

3-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors protect the contents of the unit
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Shallow depth body, for narrow footprint
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting 504 standard 12-ounce long-neck bottles
- Cabinet capable of accepting 882 standard 12-ounce beverage cans

Construction

- Painted black steel exterior, for durable and sleek modern finish
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Stainless steel interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality
- <p>Caster-ready base allows installation of heavy-duty casters for durable support and easy repositioning.</p>

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 40 mm insulation for energy saving

APPROVAL: _____


Optional Accessories

- Three Shelves for 72" Back Bar (1 Right, 1 Left, & 1 Middle) PNC 880610
- Shelf clips (4-pack) PNC 880611
- Middle Shelf for 72 back Bar (Solid & Glass Door) PNC 880620



**Refrigeration Equipment
3-Solid Door Back Bar Refrigerator Black 73" Long**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

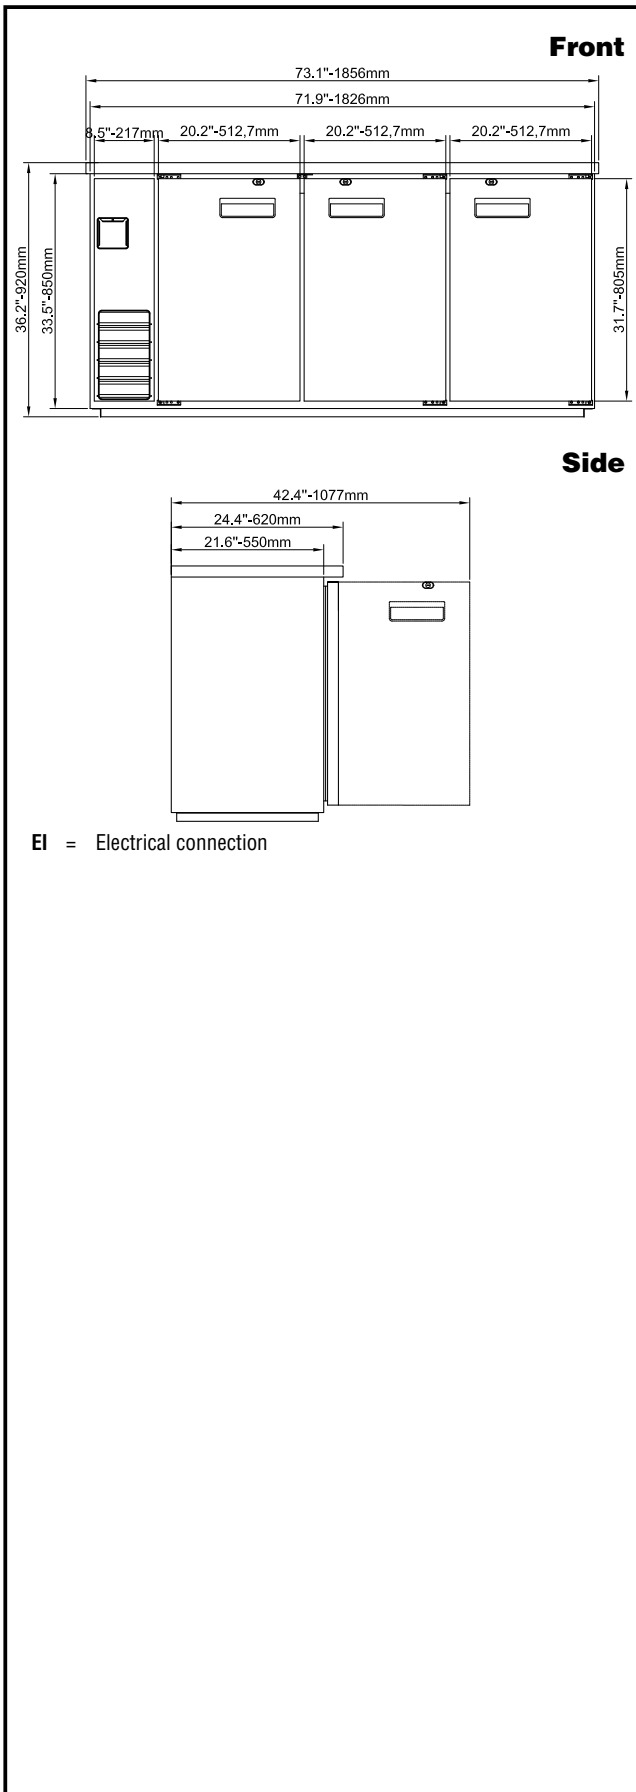

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.31 kW
Plug type:	USA NEMA 5-15P

Capacity:

Gross capacity:	20.8 cu.feet
-----------------	--------------

Key Information:

Number and type of grids (included):	6 - Vinyl-Coated Steel
Warranty:	3 / 5 years
Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 1/4" (920 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	20 " / (508 mm)
Internal Dimensions (height):	28 " / (711.2 mm)
Internal Dimensions (width):	60 " / (1524 mm)
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	337 lbs (153 kg)
Shipping volume:	47.8 ft ³ (1.35 m ³)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/5 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	130 g

