

## Refrigeration Equipment 1-Door Refrigerated Work Top 27" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738299 (KCHUCWT27R)

1-Door Refrigerated Work Top  
27" Long

### Short Form Specification

Item No. \_\_\_\_\_

1-door refrigerator counter top, with worktop, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature for units with serial number 24020014 or later. External temperature display.

R600a gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

### Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445
- Drawer Kit for 27" Undercounter PNC 880614

APPROVAL: \_\_\_\_\_

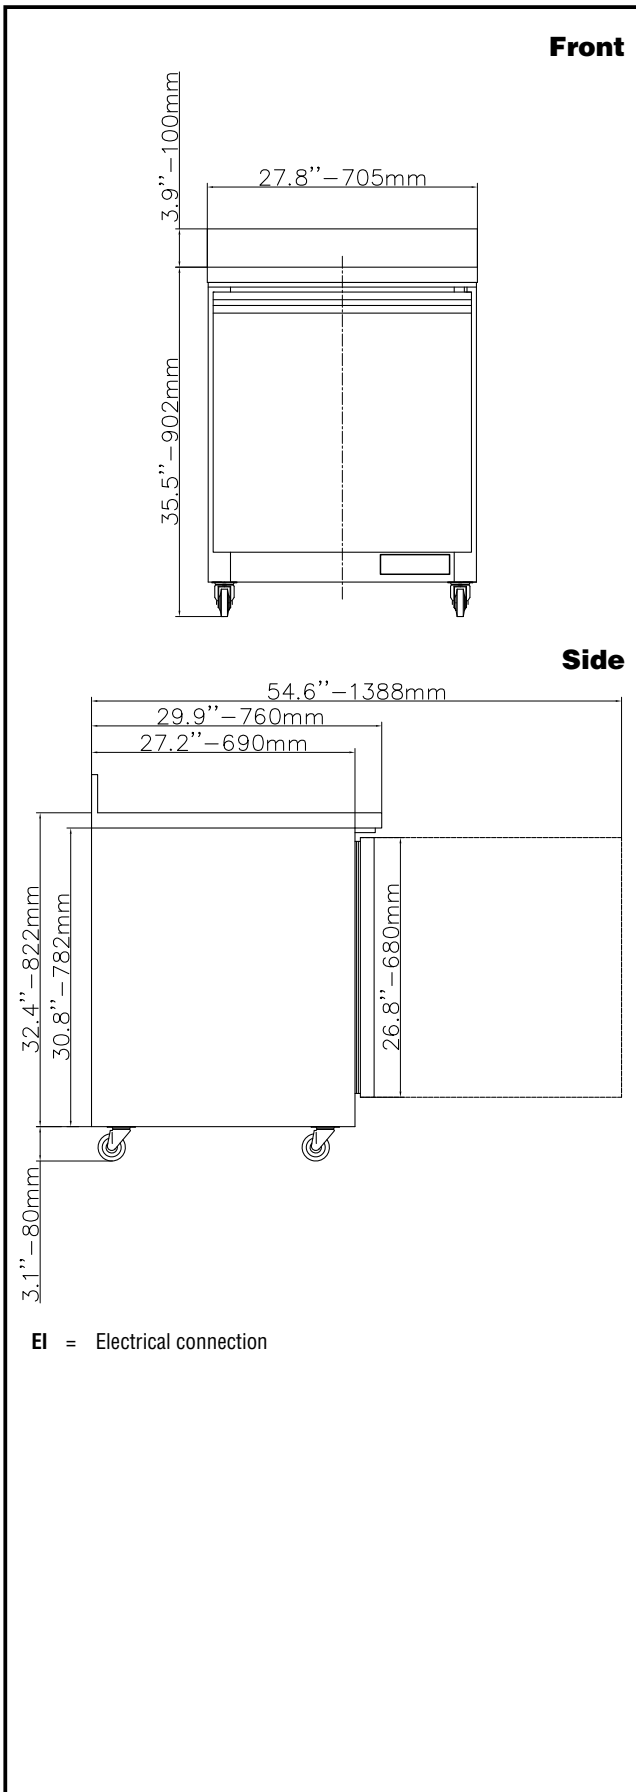

## Electric

### Supply voltage:

738299 (KCHUCWT27R) 115 V/1 ph/60 Hz

### Electrical power, max:

0.16 kW

### Plug type:

USA NEMA 5-15P

## Key Information:

<b>Door hinges:</b>	Right Side
<b>Capacity:</b>	6.50004 cu.ft.
<b>External dimensions, Width:</b>	27 3/4" (705 mm)
<b>External dimensions, Depth:</b>	29 15/16" (760 mm)
<b>External dimensions, Height:</b>	39 5/8" (1007 mm)
<b>Number and type of doors:</b>	1 Full
<b>Internal Dimensions (depth):</b>	22 13/16" / (580 mm)
<b>Internal Dimensions (height):</b>	23 1/2" / (597 mm)
<b>Internal Dimensions (width):</b>	22 1/4" / (565 mm)
<b>Shipping height:</b>	42 1/8" (1070 mm)
<b>Shipping weight:</b>	174 lbs (79 kg)
<b>Shipping volume:</b>	22.52 ft <sup>3</sup> (0.64 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	1 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Polystyrene
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ENERGY STAR;ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	1/10 hp
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	1.5 Amps
<b>Refrigerant type:</b>	R600a
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	70 g



## Refrigeration Equipment 1-Door Refrigerated Work Top 27" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.