



COMMERCIAL

Refrigeration Equipment 3-Hinged Glass Door Full Height Merchandiser Refrigerator 81" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738308 (KCHGM72R)

3-Hinged Glass Door Full Height Merchandiser Refrigerator 81" Long

Short Form Specification

Item No. _____

3-glass door refrigeration with exterior back and bottom panel in galvanized steel, exterior side and top in painted steel; interior back, side top and bottom panels in 304 stainless steel.
Self-closing doors.

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories

- Shelf for 48" and 72" (left/right) Merchandiser (Glass Door) PNC 880594
- Middle Shelf for 72" Merchandiser (Glass Door) PNC 880595
- Shelf clips (4-pack) PNC 880611

APPROVAL: _____

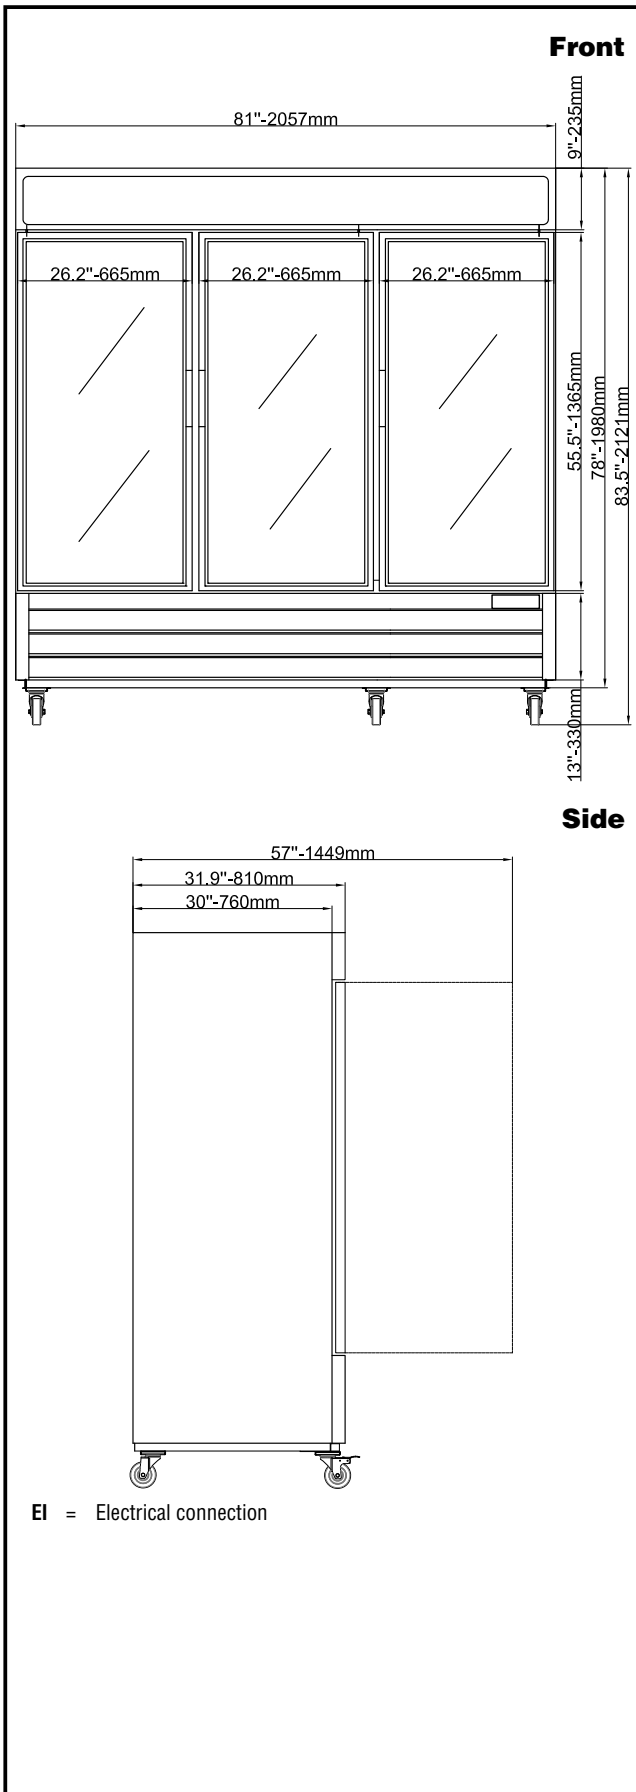

Electric

Supply voltage:	738308 (KCHGM72R)	115 V/1 ph/60 Hz
Electrical power, max:		0.78 kW
Plug type:		USA NEMA 5-15P

Key Information:

Capacity (Cu.Ft.)	72
Door hinges:	1 Left+2 Right
External dimensions, Width:	81 " (2057.4 mm)
External dimensions, Depth:	31 7/8" (810.26 mm)
External dimensions, Height:	79 1/2" (2019 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	27 9/16"
Internal Dimensions (height):	59 1/16"
Internal Dimensions (width):	76 7/16"
Number and type of grids (included):	12 - Vinyl-Coated Steel
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	780 lbs (354 kg)
Shipping volume:	142.86 ft ³ (4.05 m ³)
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Current consumption:	7.5 Amps
Refrigerant type:	R290
Refrigerant weight:	150 g