

Refrigeration Equipment 4-Half Glass Door Full Height Refrigerator 54" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738316 (KCHRI54R4HGDR) 4-Half Glass Door Full Height Refrigerator 54" Long

Short Form Specification

Item No. _____

4 glass half door refrigerator with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing door feature with lock and key.

Cabinet capable of accepting a full-size sheet pan (18X26).

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External digital temperature display.
- Half-door design minimizes cold air loss, improving energy efficiency and temperature consistency
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty Vinyl coated steel shelves.
- Adjustable shelves for flexible storage
- On/off switch controls interior LED lights
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting a full-size sheet pan (18X26)

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- Interior LED light to save energy and for best internal visibility.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 60 mm insulation for energy saving.

Optional Accessories

- 1 Adjustable Foot PNC 206445
- Shelf for 48" and 72" (left/right) Merchandiser (Glass Door) PNC 880594
- Shelf clips (4-pack) PNC 880611

APPROVAL: _____

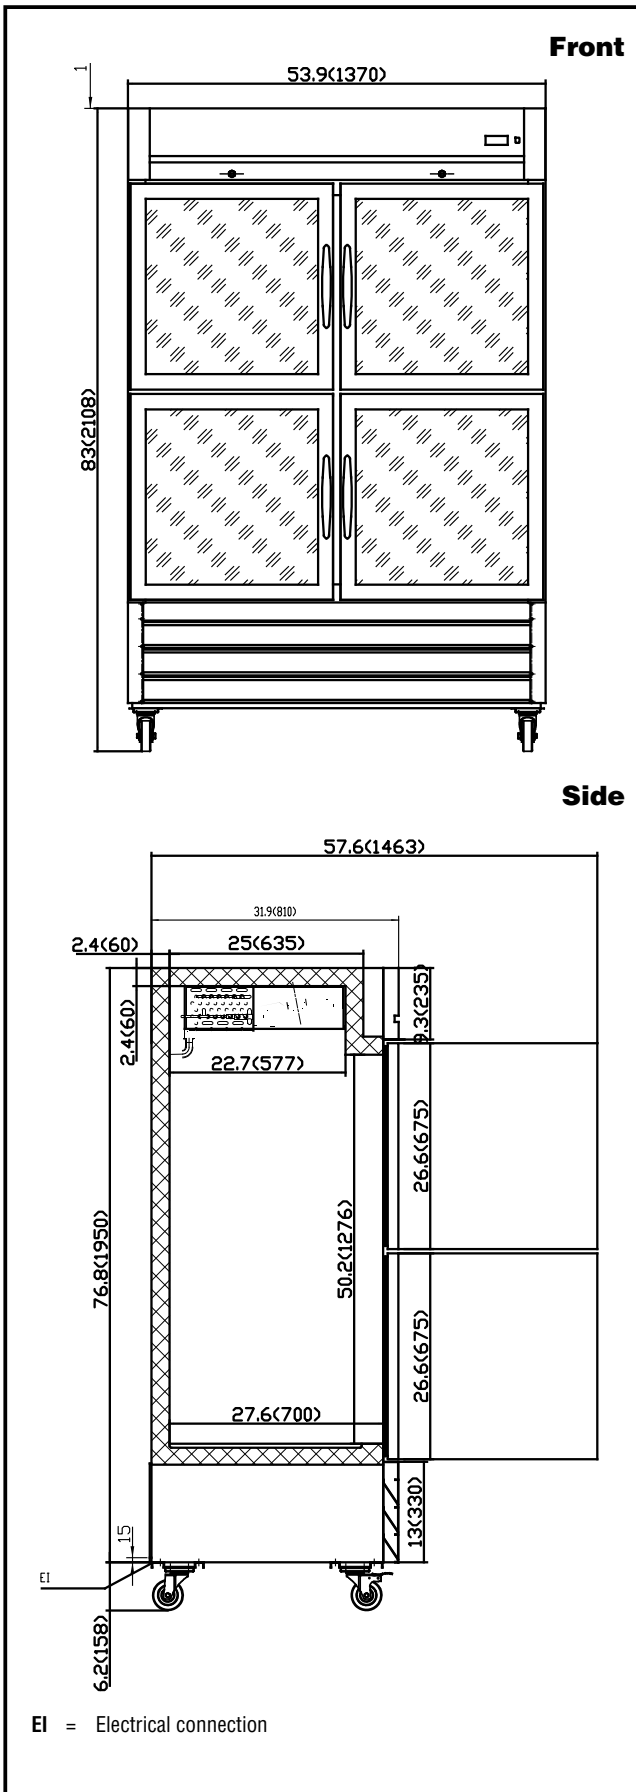

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.54 kW
Plug type:	NEMA 5-15

Capacity:

Gross capacity:	49 cu.feet
-----------------	------------

Key Information:

Number and type of grids (included):	8 - Vinyl-Coated steel
Warranty:	3 / 5 years
Door hinges:	2 Left+2 Right
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	31 7/8" (810 mm)
External dimensions, Height:	83 " (2108 mm)
Number and type of doors:	4x1/2 Glass
Internal Dimensions (depth):	27 1/2" / (698.5 mm)
Internal Dimensions (height):	50 3/16" / (1275.08 mm)
Internal Dimensions (width):	49 3/8" / (1254.76 mm)
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	520 lbs (236 kg)
Shipping volume:	92.27 ft ³ (2.61 m ³)
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Condenser Type:	Fin & Tube
Operating temperature min.:	34.52 °F
Compressor power:	1/3 hp
Operating temperature max.:	38.8 °F
Defrost type:	Automatic

Sustainability

Current consumption:	4.5 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	105 g



Refrigeration Equipment 4-Half Glass Door Full Height Refrigerator 54" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.