

## Refrigeration Equipment 1-Hinged Glass Door Full Height Ice Cube Merchandiser Freezer 26.75 " Long

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738321 1-Hinged Glass Door Full Height Ice Cube  
(KCHGICM23FB) Merchandiser Freezer 26.75" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

1-glass door freezer with exterior back, bottom, and top panels in galvanized steel, exterior side panels in painted steel; interior back, side, top in painted aluminum, and interior bottom panel in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty

### Main Features

- External digital temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.

### Construction


- Lockable door.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: \_\_\_\_\_

### Front

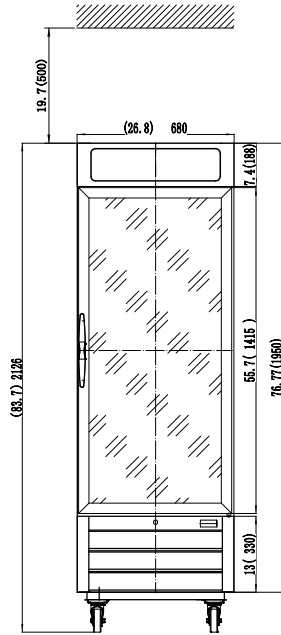


### Side

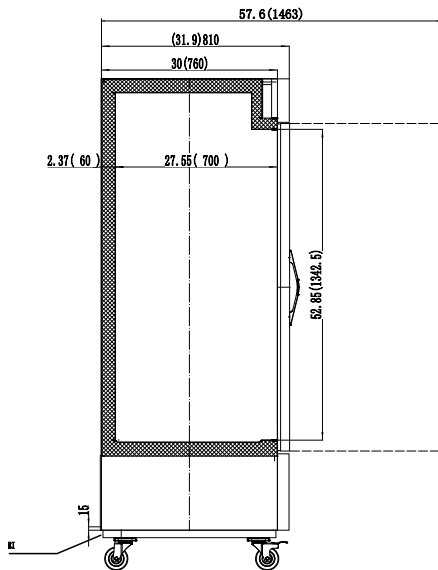

EI = Electrical connection

### Top

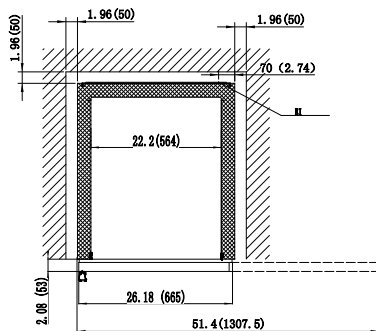

### Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.96 kW
Plug type:	NEMA 5-15

### Capacity:

Gross capacity:	21.3 cu.feet
-----------------	--------------

### Key Information:

Warranty:	3 / 5 years
Capacity:	21.316 cu.ft.
External dimensions, Width:	26 3/4" (680 mm)
External dimensions, Depth:	31 7/8" (810 mm)
External dimensions, Height:	83 11/16" (2126 mm)
Internal Dimensions (depth):	27 1/2" (698.5 mm)
Internal Dimensions (height):	52 3/8" (1330.96 mm)
Internal Dimensions (width):	22 3/16" (563.88 mm)
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	342 lbs (155 kg)
Shipping volume:	49.05 ft <sup>3</sup> (1.39 m <sup>3</sup> )
Type of external material:	Black Prepainted Steel
Type of internal material:	White Prepainted Aluminium
Approvals	ETL C&US;ETL SANITATION

### Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	17.6 °F
Compressor power:	1 hp
Operating temperature max.:	23 °F
Defrost type:	Automatic

### Sustainability

Current consumption:	8 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	110 g