



COMMERCIAL

## Refrigeration Equipment 6-Tub Ice Cream Dipping Cabinet 48" Long

ITEM #

MODEL #

NAME #

SIS #

AIA #



738372 (KCICDC6FH)

6-Tub Ice Cream Dipping  
Cabinet 48" Long

### Short Form Specification

#### Item No.

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames; (6) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

### Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

### Construction

- Tempered glass viewing pains & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.

### Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.


APPROVAL:

Part of



Electrolux  
Professional  
Group

**Kelvinator Commercial**  
www.kelvinatorcommercial.com

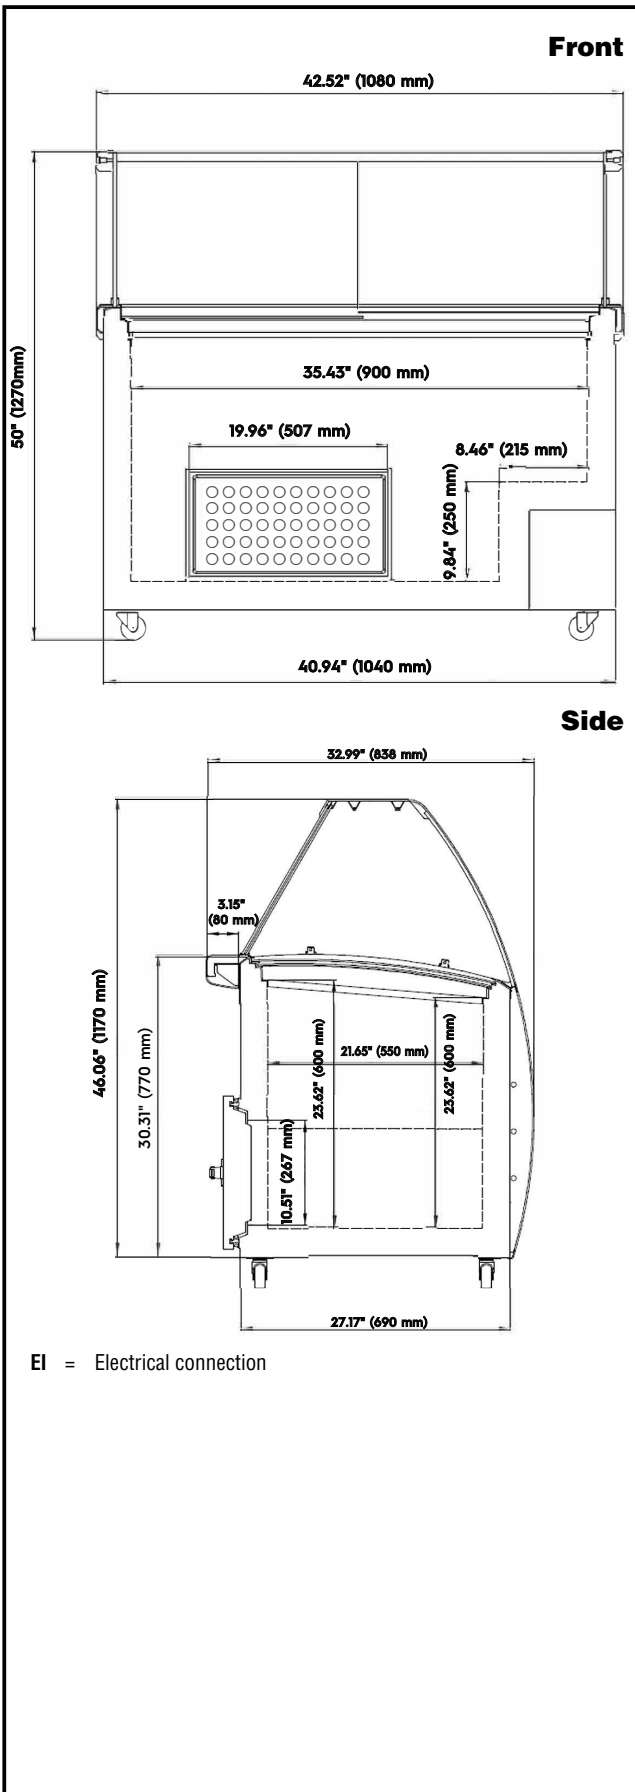

### Electric

Supply voltage:	115 V/1 ph/60 Hz
738372 (KCICDC6FH)	
Electrical power, max:	0.2 kW
Plug type:	USA NEMA 5-15P
Maximum Over-Current Protection (MOP):	0A

### Key Information:

Capacity:	11.4773 cu.ft.
External dimensions, Width:	42 1/2" (1080 mm)
External dimensions, Depth:	33 " (838 mm)
External dimensions, Height:	50 " (1270 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	35 7/16"
Internal Dimensions (width):	21 5/8"
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	304 lbs (138 kg)
Shipping volume:	55.18 ft <sup>3</sup> (1.56 m <sup>3</sup> )
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	;ETL C&US;ETL SANITATION

### Refrigeration Data

Operating temperature min.:	-4 °F
Operating temperature max.:	4 °F
Refrigerant type:	

### Sustainability

Current consumption:	1.4 Amps
Refrigerant type:	R290