



COMMERCIAL

Refrigeration Equipment 8-Tub Ice Cream Dipping Cabinet 53" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738373 (KCICDC8FH)

8-Tub Ice Cream Dipping
Cabinet 53" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (8) barrel ice cream tub frames; (8) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 8-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

Construction

- Tempered glass viewing pains & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.

Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Optional Accessories

- Combined 5L Pan Support Metal Frame & 5L Pan Support Acrylic Frame for 8 Tub Ice Cream Dipping Cabinet PNC 882014


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

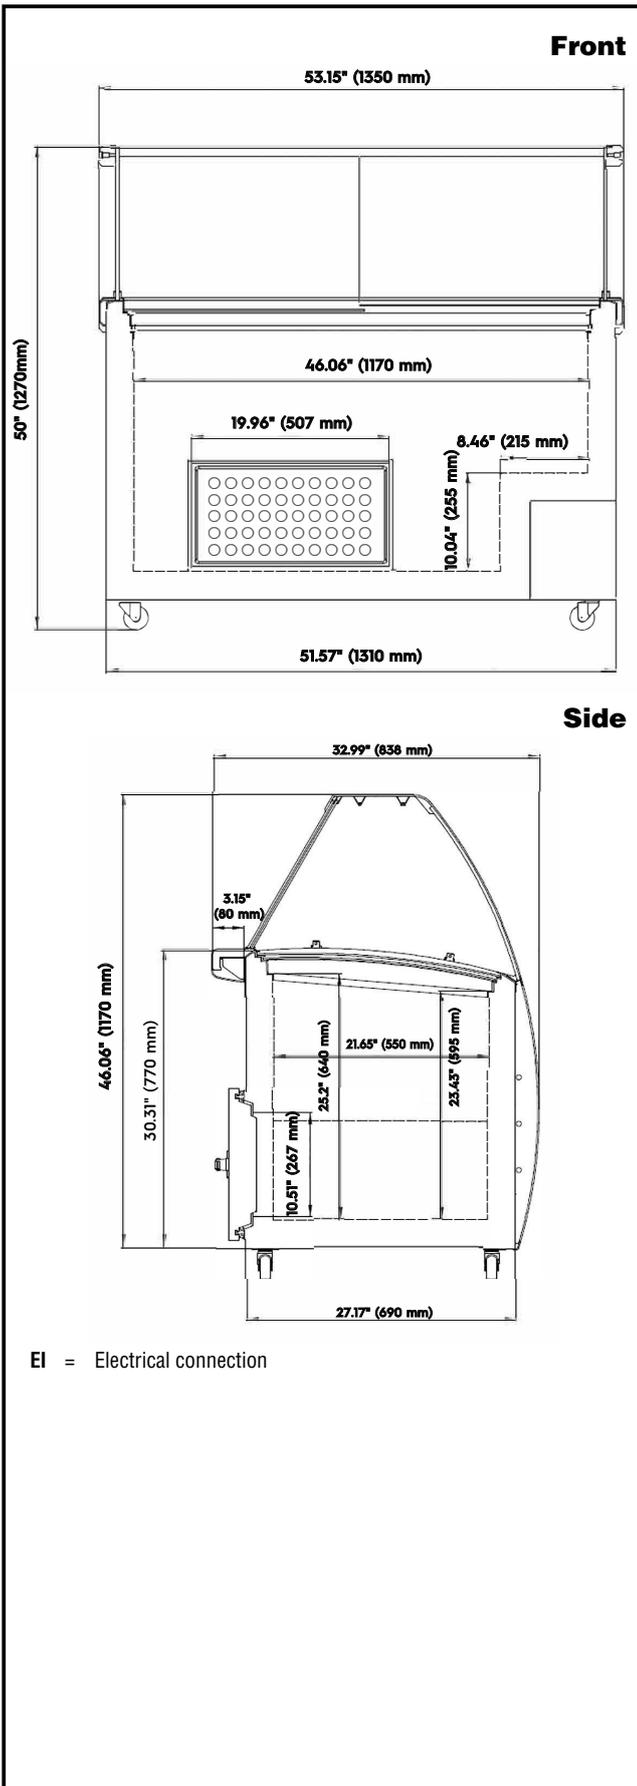

Electric

Supply voltage:	738373 (KCICDC8FH)	115 V/1 ph/60 Hz
Electrical power, max:		0.3 kW
Defrost Power		
Plug type:		USA NEMA 5-15P
Maximum Over-Current Protection (MOP):		0A

Key Information:

Gross capacity:	415 lt
Capacity:	14.6556 cu.ft.
External dimensions, Width:	53 1/8" (1350 mm)
External dimensions, Depth:	33" (838 mm)
External dimensions, Height:	50" (1270 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	46 1/16"
Internal Dimensions (width):	21 5/8"
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	357 lbs (162 kg)
Shipping volume:	67.49 ft ³ (1.91 m ³)
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:	-4 °F
Operating temperature max.:	4 °F

Sustainability

Current consumption:	2 Amps
Refrigerant type:	R290