

Refrigeration Equipment 8-Tub Ice Cream Dipping Cabinet 53" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738373 (KCICDC8FH)

8-Tub Ice Cream Dipping
Cabinet 53" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (8) barrel ice cream tub frames; (8) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Ropack tub bracket insert included after select serial number 004352000182

Main Features

- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 8-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.

Construction

- Tempered glass viewing pans & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Optional Accessories

- Combined 5L Pan Support Metal Frame & 5L Pan Support Acrylic Frame for 8 Tub Ice Cream Dipping Cabinet PNC 882014

APPROVAL: _____

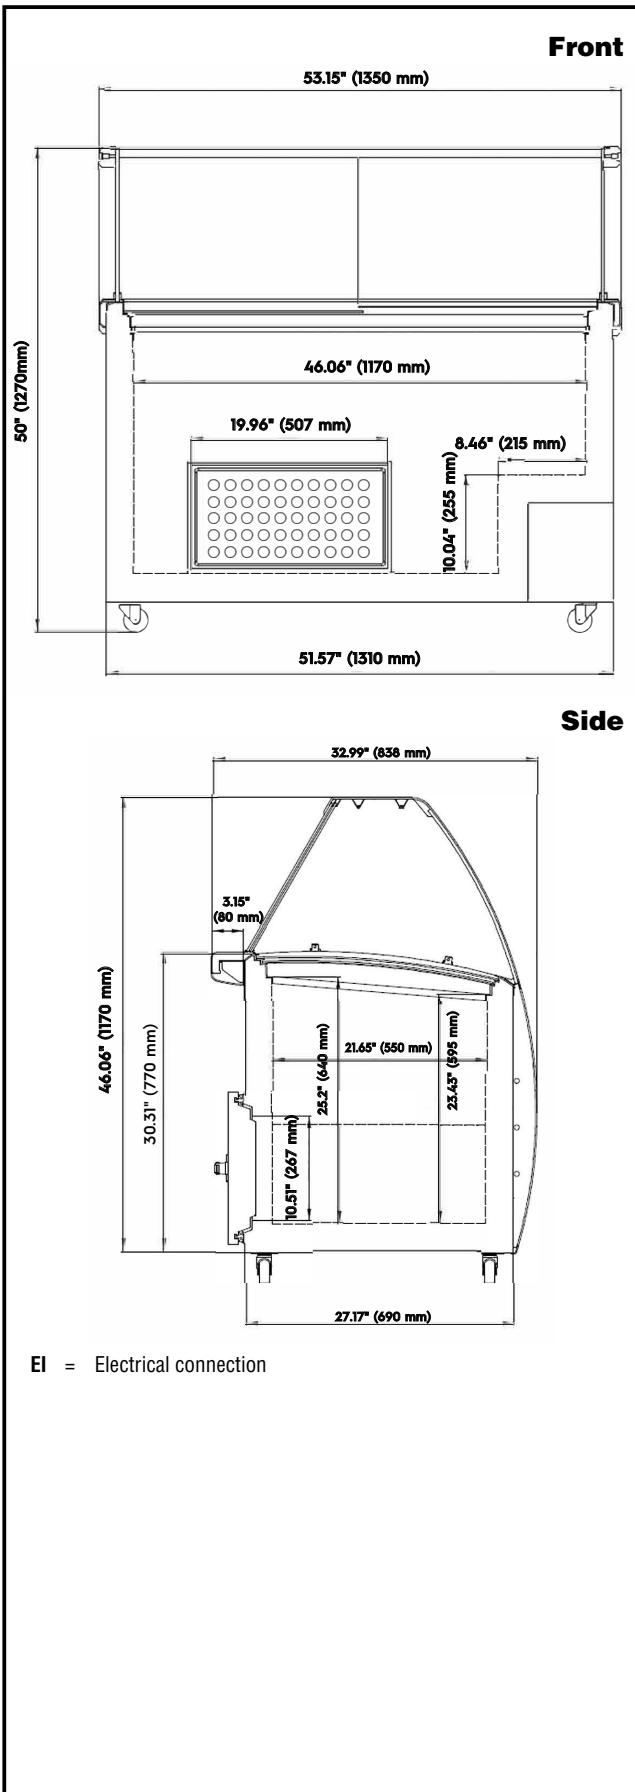

Electric

| | | |
|------------------------|--------------------|------------------|
| Supply voltage: | 738373 (KCICDC8FH) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.3 kW |
| Plug type: | | USA NEMA 5-15P |

Key Information:

| | |
|-------------------------------|--|
| Capacity: | 14.6556 cu.ft. |
| External dimensions, Width: | 53 1/8" (1350 mm) |
| External dimensions, Depth: | 33 " (838 mm) |
| External dimensions, Height: | 50 " (1270 mm) |
| Internal Dimensions (depth): | 23 5/8" / (600 mm) |
| Internal Dimensions (height): | 46 1/16" / (1170 mm) |
| Internal Dimensions (width): | 21 5/8" / (550 mm) |
| Shipping height: | 50 9/16" (1285 mm) |
| Shipping weight: | 357 lbs (162 kg) |
| Shipping volume: | 67.49 ft ³ (1.91 m ³) |
| Type of external material: | Prepainted white |
| Type of internal material: | White Prepainted Steel |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|-----------------------------|------------|
| Compressor power: | 1/4 hp |
| Operating temperature min.: | -14.8 °F |
| Operating temperature max.: | 6.8 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Automatic |

Sustainability

| | |
|----------------------|--------|
| Current consumption: | 2 Amps |
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 110 g |