



COMMERCIAL

# Refrigeration Equipment 3-Door Pizza Prep Table 94 " Long 12-1/3 Pan

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738254 (KCHPT92.12)

3-Door Pizza Prep Table 94  
" Long 12-1/3 Pan

## Short Form Specification

Item No. \_\_\_\_\_

3-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x91.81x19.53 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

## Main Features

- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

## Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 12 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


## Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

## Optional Accessories

- middle shelf for 92" pizza counter PNC 880607
- two shelves for 48" back bar (one right and one left shelves) PNC 880608
- shelf clips PNC 880611

APPROVAL: \_\_\_\_\_

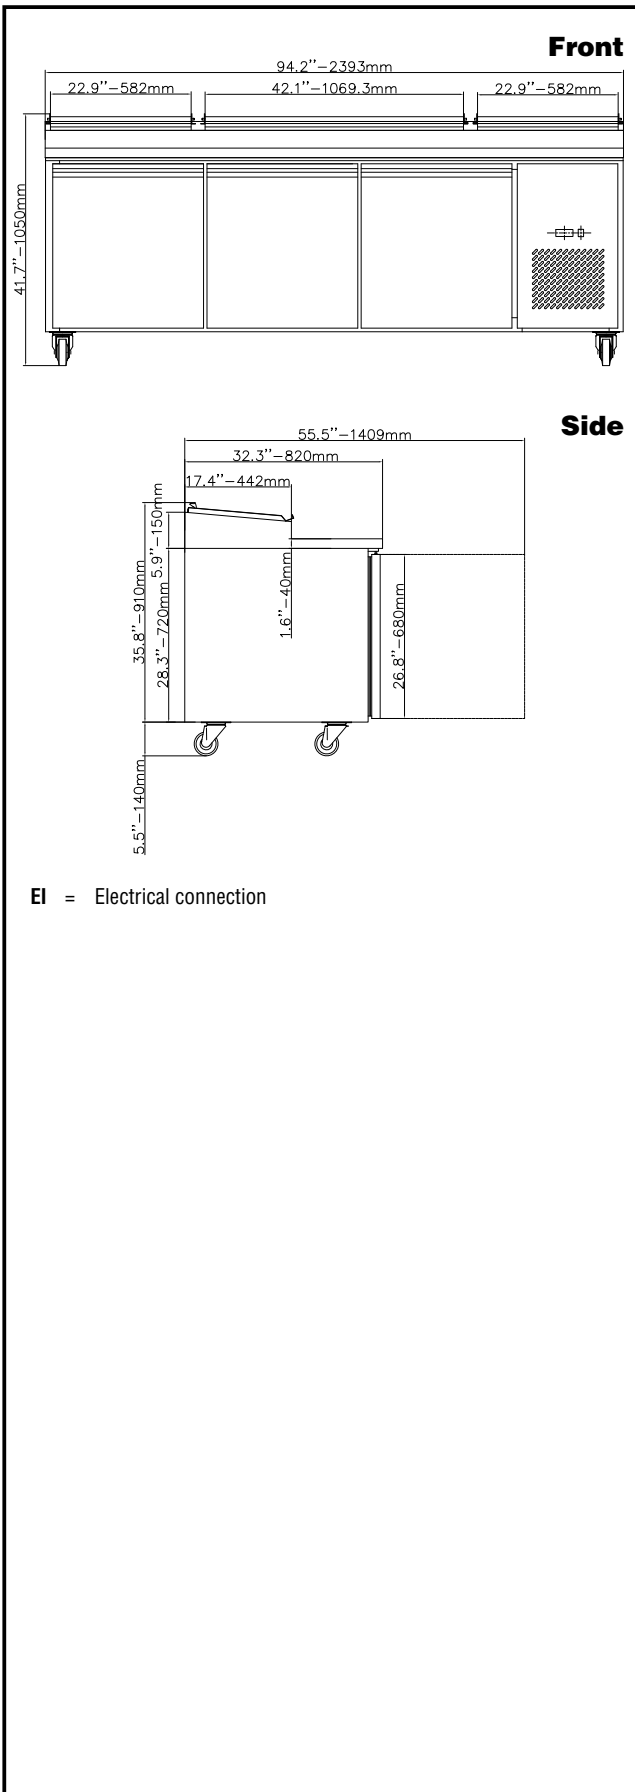

## Electric

Supply voltage:	738254 (KCHPT92.12)	115 V/1 ph/60 Hz
Electrical power, max:		0.9 kW
Plug type:		NEMA 5-15

## Capacity:

Gross capacity:	32 cu.feet
-----------------	------------

## Key Information:

Door hinges:	1 Left+2 Right
External dimensions, Width:	94 3/16" (2393 mm)
External dimensions, Depth:	32 1/4" (820 mm)
External dimensions, Height:	41 5/16" (1050 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	22 13/16"
Internal Dimensions (height):	26 3/16"
Internal Dimensions (width):	69 7/16"
Shipping height:	44 1/2" (1130 mm)
Shipping weight:	551 lbs (250 kg)
Shipping volume:	84.07 ft <sup>3</sup> (2.38 m <sup>3</sup> )
Type of grids (included):	Vinyl-Coated steel
Type of external material:	Stainless Steel
Type of internal material:	304 AISI
Warranty:	3 / 5 years

## Refrigeration Data

Compressor power:	1/2 hp
Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Automatic defrost cooling system:	X
Defrost type:	Auto Defrost

## Sustainability

Current consumption:	9 Amps
Refrigerant type:	R290
Refrigerant weight:	105 g