



COMMERCIAL

Refrigeration Equipment 2-Solid Door Back Bar Cooler Stainless Steel 49" Long


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

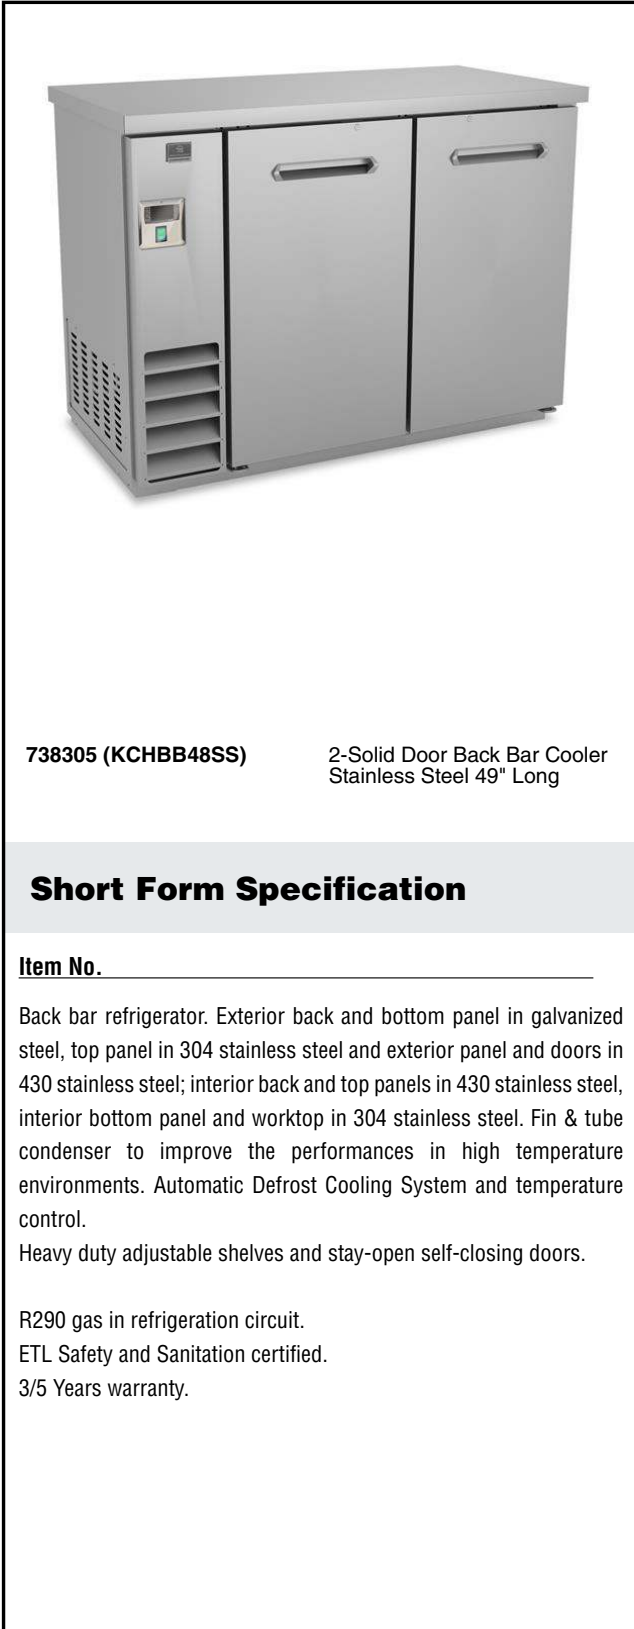

738305 (KCHBB48SS)

2-Solid Door Back Bar Cooler
Stainless Steel 49" Long

Short Form Specification

Item No. _____

Back bar refrigerator. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel and doors in 430 stainless steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- two shelves for 48" back bar (one right and one left shelves) PNC 880608
- shelf clips PNC 880611

APPROVAL: _____

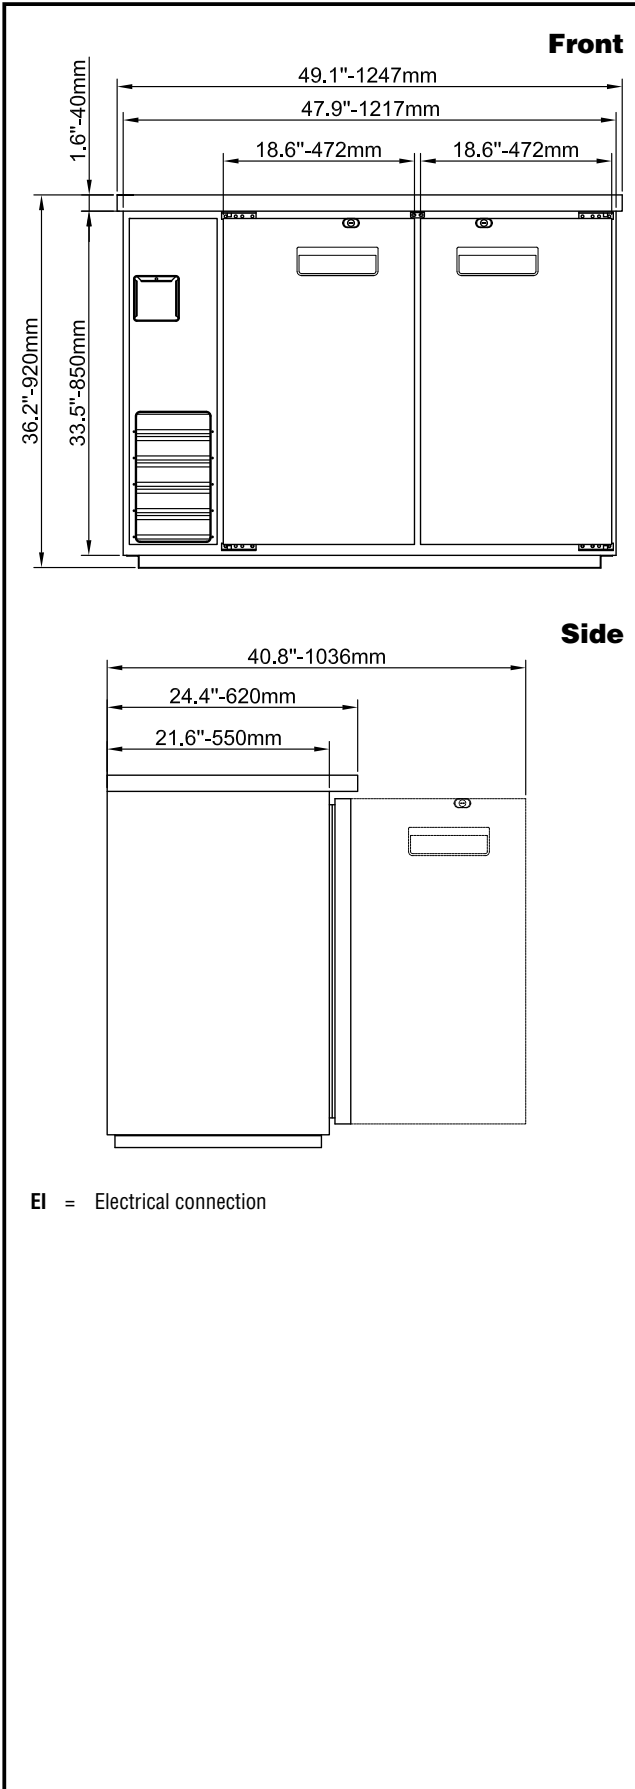

Electric

Supply voltage:	738305 (KCHBB48SS)	115 V/1 ph/60 Hz
Electrical power, max:		0.3 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	12.9 cu.feet
-----------------	--------------

Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Width:	49 1/16" (1247 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	18 1/2"
Internal Dimensions (height):	28 15/16"
Internal Dimensions (width):	36 1/4"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	260 lbs (118 kg)
Shipping volume:	32.45 ft ³ (0.92 m ³)
Number and type of grids (included):	4 - Vinyl-Coated Steel
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Operating temperature min.:	ISO 9001 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube

Sustainability

Current consumption:	3 Amps
Refrigerant type:	R290
Refrigerant weight:	110 g