

## Refrigeration Equipment 2-Solid Door Back Bar Cooler Stainless Steel 49" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738305 (KCHBB48SS)

2-Solid Door Back Bar Cooler  
Stainless Steel 49" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

2-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in 430 stainless steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


### Construction

- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

APPROVAL: \_\_\_\_\_

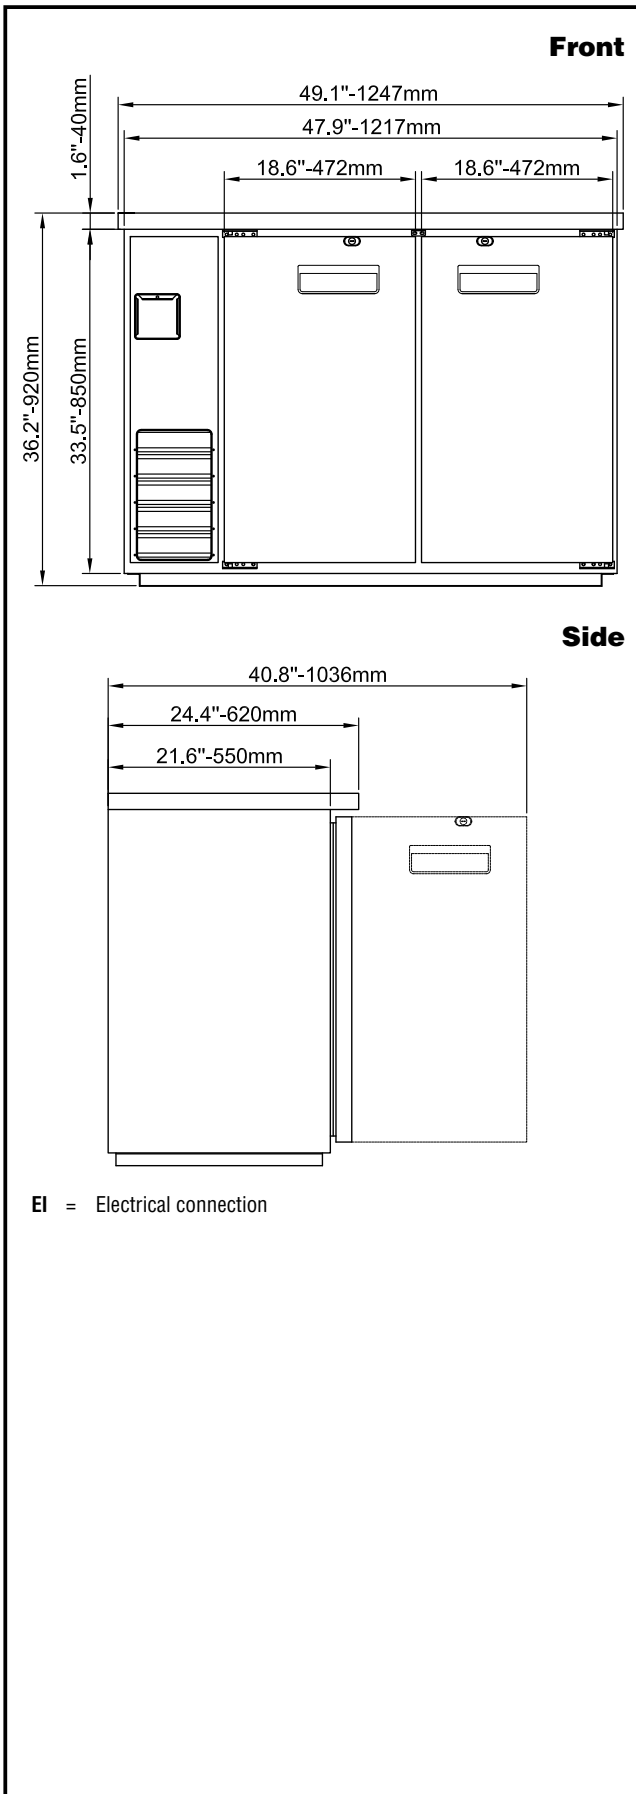

## Electric

<b>Supply voltage:</b>	
738305 (KCHBB48SS)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.31 kW
<b>Plug type:</b>	USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	12.5 cu.feet
------------------------	--------------

## Key Information:

<b>Door hinges:</b>	1 Left+1 Right
<b>Capacity:</b>	12.5 cu.ft.
<b>External dimensions, Width:</b>	49 1/16" (1247 mm)
<b>External dimensions, Depth:</b>	24 7/16" (620 mm)
<b>External dimensions, Height:</b>	36 1/4" (920 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	20 " / (508 mm)
<b>Internal Dimensions (height):</b>	28 " / (711.2 mm)
<b>Internal Dimensions (width):</b>	36 " / (914.4 mm)
<b>Shipping height:</b>	41 5/16" (1050 mm)
<b>Shipping weight:</b>	260 lbs (118 kg)
<b>Shipping volume:</b>	32.45 ft <sup>3</sup> (0.92 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	4 - Vinyl-Coated Steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	Stainless Steel
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	1/5 hp
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	3 Amps
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	110 g