



COMMERCIAL

Refrigeration Equipment 6 Tub Ice Cream Dipping Cabinet R290

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738372 (KCICDC6FH)

6-Tub Ice Cream Dipping
Cabinet 48" Long

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames; (6) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Construction

- Tempered glass viewing pains & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

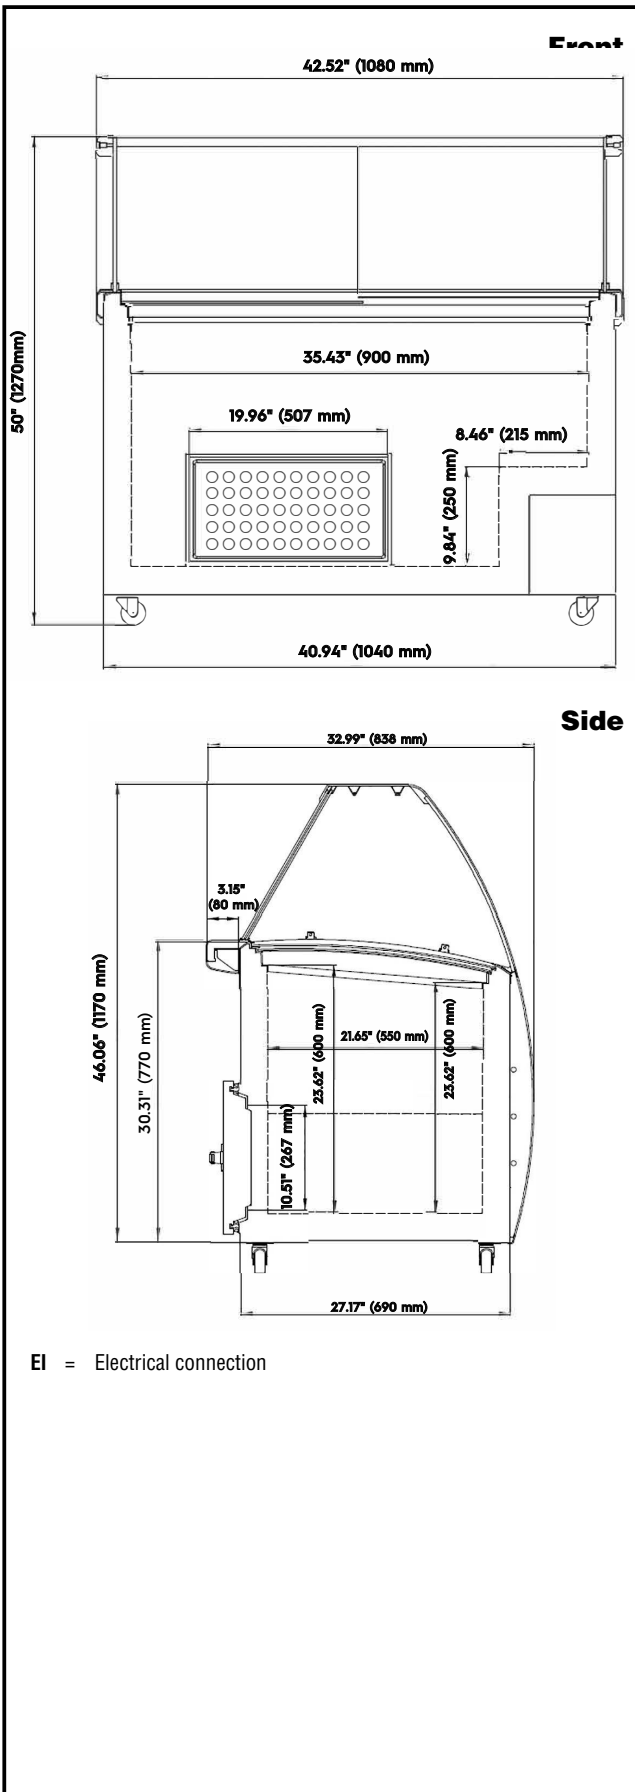

Electric

Supply voltage:	738372 (KCICDC6FH)	120 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Plug type:		USA NEMA 5-15P
Maximum Over-Current Protection (MOP):		0A

Key Information:

Capacity:	10.5944 cu.ft.
External dimensions, Width:	47 5/8" (1210 mm)
External dimensions, Depth:	39 9/16" (1005 mm)
External dimensions, Height:	51 9/16" (1310 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	35 7/16"
Internal Dimensions (width):	21 5/8"
Shipping height:	53 15/16" (1370 mm)
Shipping weight:	392 lbs (178 kg)
Shipping volume:	61.24 ft ³ (1.73 m ³)
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:	-40 °F
Operating temperature max.:	14 °F
Refrigerant type:	

Sustainability

Current consumption:	
Refrigerant type:	R290