



## Modular Cooking Range Line EVO900 1200mm Electric Fry Top HP, Smooth Scratch Resistant Chromium Plate



392404 (Z9IIKDAOMIA)

Large electric fry top with smooth scratch resistant chromium cooking plate, horizontal, thermostatic control, scraper included - HP (availability from Q2 2020)

### Short Form Specification

#### Item No.

Smooth scratch resistant chromium cooking surface. Heating elements positioned beneath the cooking plate to ensure very fast heat-up time to maximum temperature and quick temperature recovery. High precision thermostatic control. To be installed on open base installations, bridging supports or cantilever systems. Removable drawers below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Safety thermostat and thermostatic control.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Two large drain holes on cooking surface permits the draining of fat into two separate 3 liter collectors placed under the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Infrared heating elements mounted below the cooking surface.
- Units have 4 independent controls to regulate temperature of the cooking surface.
- Temperature range from 120° up to 280°C.
- Suitable for countertop installation.

### Construction

- Cooking surface completely smooth.
- AISI 304 stainless steel worktop, 2mm thick.
- Unit is 900mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Non-scratch cooking surface 20mm thick for optimum grilling results and ease of use.

APPROVAL: \_\_\_\_\_

Part of



Electrolux  
Professional  
Group

Zanussi Professional  
[www.zanussiprofessional.com](http://www.zanussiprofessional.com)


**Included Accessories**

- 1 of Scraper for smooth plate for fry tops PNC 164255


**Optional Accessories**

|  |            |                          |
|--|------------|--------------------------|
| • Scraper for smooth plate for fry tops                              | PNC 164255 | <input type="checkbox"/> |
| • Support for bridge type installation, 1200 mm                      | PNC 206139 | <input type="checkbox"/> |
| • Support for bridge type installation, 1400 mm                      | PNC 206140 | <input type="checkbox"/> |
| • Support for bridge type installation, 1600 mm                      | PNC 206141 | <input type="checkbox"/> |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | <input type="checkbox"/> |
| • Water column extension   | PNC 206290 | <input type="checkbox"/> |
| • Water drain for fry tops HP  | PNC 206345 | <input type="checkbox"/> |
| • Base support for feet or wheels - 1200mm (EVO700/EVO900)           | PNC 206368 | <input type="checkbox"/> |
| • - NOT TRANSLATED -   | PNC 206455 | <input type="checkbox"/> |



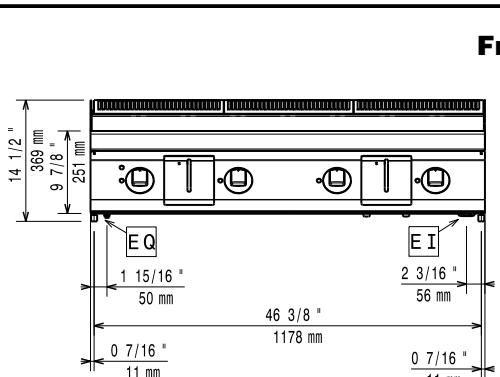

**Front**

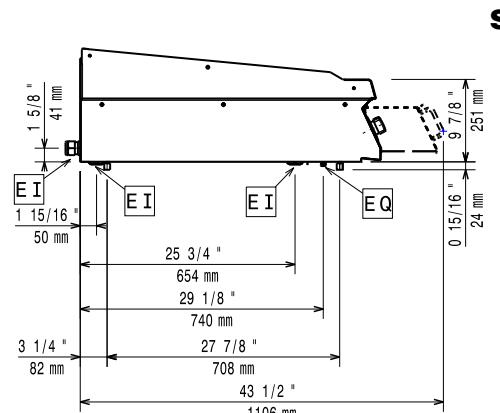


**Side**

**EI** = Electrical inlet (power)

**EQ** = Equipotential screw

**Top**

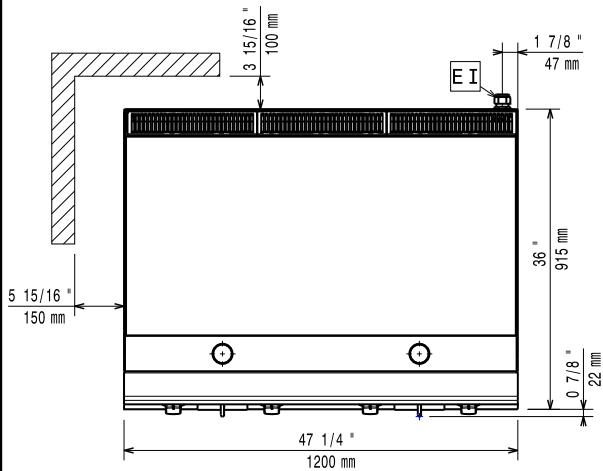

## Electric

**Supply voltage:** 380-400 V/3 ph/50-60 Hz

**Predisposed for:**

**Total Watts:** 20 kW

## Key Information:

**External dimensions, Width:** 1200 mm

**External dimensions, Depth:** 900 mm

**External dimensions, Height:** 250 mm

**Net weight:** 150 kg

**Shipping weight:** 189 kg

**Shipping height:** 580 mm

**Shipping width:** 1020 mm

**Shipping depth:** 1270 mm

**Shipping volume:** 0.75 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



**Modular Cooking Range Line**  
**EVO900 1200mm Electric Fry Top HP, Smooth Scratch Resistant**  
**Chromium Plate**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.01.05