



Modular Cooking Range Line EVO900 Half Module Electric Grill



392270 (Z9GREDGCFU)

Electric grill, half module - free standing

Short Form Specification

Item No.

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids in enameled cast iron, easily removable for cleaning. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has a temperature controlled thermostat.
- Power indicator light.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softener food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL:

Part of



Electrolux
Professional
Group

Zanussi Professional
www.zanussiprofessional.com

Included Accessories

- 1 of Scraper for cast iron grills

PNC 206422

- Stainless steel grid with drainage channels for free standing V-shaped grills (EVO900)

PNC 206409



Optional Accessories

- Junction sealing kit
- 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.

PNC 206086



PNC 206135



- Flanged feet kit
- Frontal kicking strip for concrete installation, 400 mm

PNC 206136



PNC 206147



- Frontal kicking strip for concrete installation, 800 mm
- Frontal kicking strip for concrete installation, 1000 mm

PNC 206148



- Frontal kicking strip for concrete installation, 1200 mm
- Frontal kicking strip for concrete installation, 1600 mm

PNC 206150



- Frontal kicking strip for concrete installation, 1200 mm
- Frontal kicking strip for concrete installation, 1600 mm

PNC 206151



- Frontal kicking strip for concrete installation, 1600 mm
- 2 SIDE KICKING STRIPS-CONCRETE INST-900

PNC 206152



- Side handrail for right/left hand

PNC 206165



- Frontal handrail 400 mm

PNC 206166



- Frontal handrail 800 mm

PNC 206167



- Frontal kicking strip, 400 mm

PNC 206175



- Frontal kicking strip, 800 mm

PNC 206176



- Frontal kicking strip, 1000 mm

PNC 206177



- Frontal kicking strip, 1200 mm

PNC 206178



- Frontal kicking strip, 1600 mm

PNC 206179



- Pair of side kicking strips

PNC 206180



- 2 panels for service duct (single installation)
- Large handrail (portioning shelf) 400 mm

PNC 206181



PNC 206185



- Large handrail (portioning shelf) 800 mm

PNC 206186



- Frontal handrail 1200 mm

PNC 206191



- Frontal handrail 1600 mm

PNC 206192



- 2 panels for service duct (back to back installation)
- 4 feet for concrete installation (not for 900 line freestanding grill)

PNC 206202



- Water filling tap for 400 mm free standing grills
- Chimney upstand, 400 mm

PNC 206210



PNC 206280



- 2 side covering panels, height 700 mm, depth 900 mm

PNC 206303



- Base support for feet or wheels - 400mm (EVO700/900)

PNC 206335



- Base support for feet or wheels - 800mm (EVO700/900)

PNC 206366



- Base support for feet or wheels - 1200mm (EVO700/EVO900)

PNC 206367



- Base support for feet or wheels - 1600mm (EVO700/900)

PNC 206368



- Base support for feet or wheels - 2000mm (EVO700/900)

PNC 206369



- Rear paneling - 600mm (EVO700/900)

PNC 206370



- Rear paneling - 800mm (EVO700/900)

PNC 206373



- Rear paneling - 1000mm (EVO700/900)

PNC 206374



- Rear paneling - 1200mm (EVO700/900)

PNC 206375



- Rear paneling - 1200mm (EVO700/900)


PNC 206376




Modular Cooking Range Line
EVO900 Half Module Electric
Grill

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.19

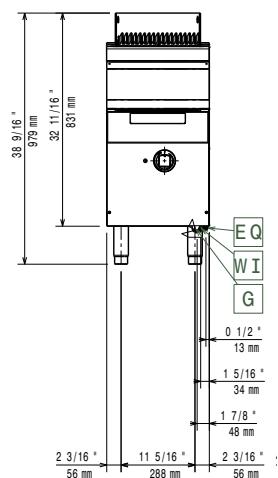


Front

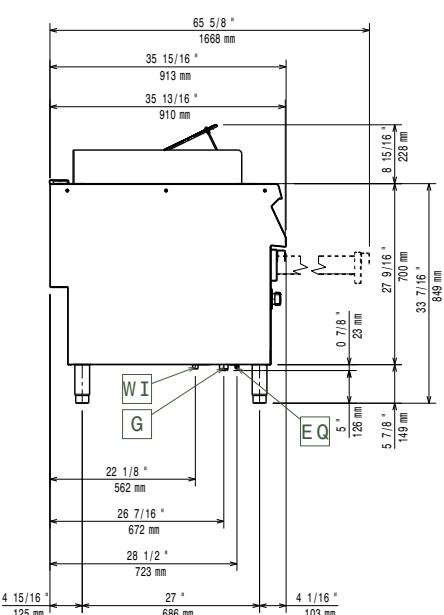

Side

Top

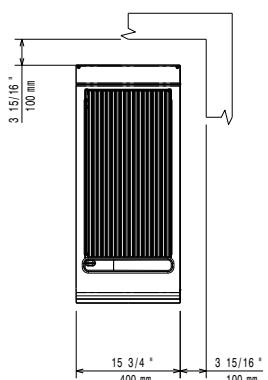

Electric

Supply voltage: 380-400 V/3N ph/50-60 Hz

Predisposed for:

Electrical power max.: 7.5 kW

Total Watts: 7.5 kW

Key Information:

External dimensions, Width: 400 mm

External dimensions, Depth: 900 mm

External dimensions, Height: 850 mm

Net weight: 60 kg

Shipping weight: 73 kg

Shipping height: 1030 mm

Shipping width: 500 mm

Shipping depth: 1020 mm

Shipping volume: 0.53 m³

[NOT TRANSLATED] EG91F

Cooking surface width: 316 mm

Cooking surface depth: 640 mm

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

EI = Electrical inlet (power)

EQ = Equipotential screw



**Modular Cooking Range Line
EVO900 Half Module Electric Grill**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.12.19