

## Digital Cabinets Roll-in Compact Refrigerator 750 lt - Glass door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



110881 (ZRI075R1G)

1-glass door Roll-in  
Refrigerator 750lt, +2+10°C,  
AISI 304, R290

### Short Form Specification

**Item No.** \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged glass door with lock. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch; internal lighting. Operating temperature +2+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R290 gas in refrigeration circuit.

### Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m<sup>2</sup>).
- Right hinged glass door.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Inner side protectors to protect the internal walls.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Interior light and lockable door.
- Digital control panel with temperature display.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Complies with main international certification bodies and is CE marked.
- Tropicalized unit.

APPROVAL: \_\_\_\_\_

### Construction

- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.


### Sustainability

- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


### Optional Accessories

- Insulated floor-ramp for 750lt Roll-in Refrigerator PNC 881278
- Trolley 18 GN 2/1 for 750lt Roll-in PNC 881521

**Front**

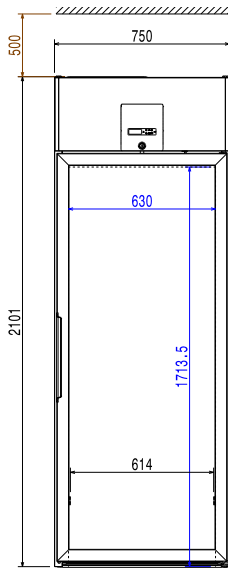


**Side**

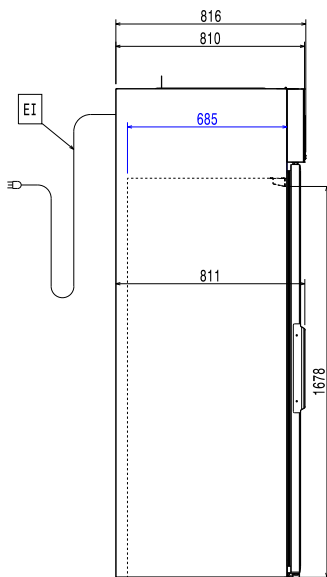

EI = Electrical inlet (power)

**Top**

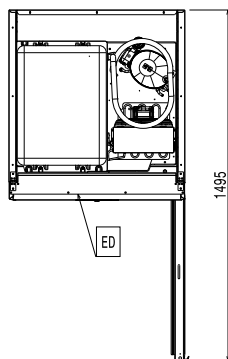

**Electric**

**Supply voltage:**

110881 (ZRI075R1G) 220-240 V/1 ph/50 Hz

**Predisposed for:**

220-230 V 60 Hz

**Key Information:**

<b>Door hinges:</b>	Right Side
<b>External dimensions, Width:</b>	750 mm
<b>External dimensions, Depth:</b>	816 mm
<b>External dimensions, Height:</b>	2101 mm
<b>Number and type of doors:</b>	1 Glass
<b>External side panels:</b>	304 AISI
<b>External top panels:</b>	Galvanized Steel
<b>External door material:</b>	Glass
<b>Internal panels material:</b>	304 AISI

**Refrigeration Data**

<b>Compressor power:</b>	1/3 hp
<b>Operating temperature min.:</b>	2 °C
<b>Operating temperature max.:</b>	10 °C

**Sustainability**

<b>Refrigerant type:</b>	R290
<b>Refrigeration power:</b>	520 W
<b>Refrigerant weight:</b>	150 g