

Premium Preparation 1400 mm Refrigerated Processing Table

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**133634 (TLCR1410N)**Refrigerated processing
counter with polythene cutting
board and upstand, 1400mm

Short Form Specification

Item No. _____

Ideal for processing meat, fish and all foods requiring strict HACCP regulations. Constructed in 304 AISI stainless steel. Segmented (4xGN1/1 size) TEFLON removable worktop surface. Frame on top designed to hold 5xGN1/4 containers (not included). Refrigerated air flow on the worktop surface assuring a +4/+8° C temperature with a 25° C ambient temperature. Built-in refrigeration unit. Ventilated. Refrigerant R134a. CFC and HCFC free. Round section legs and feet in 304 AISI stainless steel, 50mm in diameter. Height-adjustable feet (+0-50mm).

Main Features


- Ideal for processing meat, fish and all foods requiring strict HACCP regulations.
- Guarantees perfect food conservation during processing without disrupting the cold flow chain.
- Sturdiness, stability and reliability of table accurately tested.

Construction


- Round section legs with feet in 304 AISI stainless steel, 50 mm in diameter, adjustable in height by +0/-40 mm.
- Segmented GN1/1 size TEFLON removable worktop for ideal hygiene and cleanability.
- Anti-drip edge under the working top.
- Refrigerated air flow ensures a +4/+8 temperature with a 25°C room temperature.
- Accepts 4 GN 1/1 containers on the well and 5 GN 1/4 containers on the top.
- 100 mm upstand with 10 mm radiused corner and 13 mm deep, designed to be used against a wall.
- Heavy duty construction entirely in AISI 304 stainless steel to offer maximum durability.

APPROVAL: _____

Front

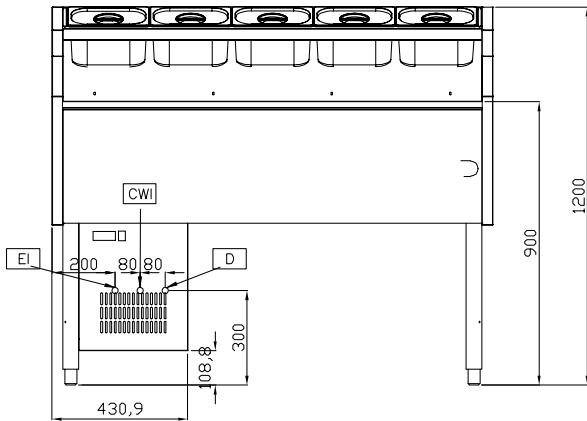


Side

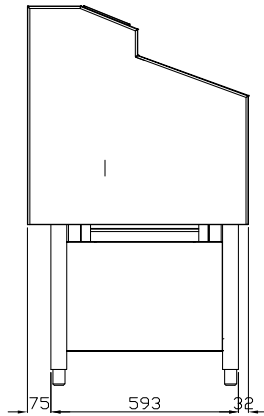

EI = Electrical inlet (power)

Top

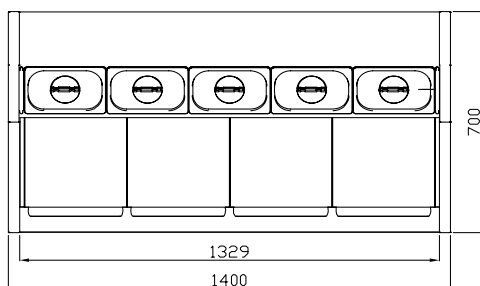

Electric

Supply voltage:

133634 (TLCR1410N) 230 V/1N ph/50 Hz

Total Watts:

0.8 kW

Key Information:

External dimensions,

Width: 1400 mm

External dimensions,

Depth: 700 mm

External dimensions,

Height: 1200 mm

Worktop thickness:

50 mm

Net weight:

145 kg