

#### Modular Cooking Range Line EVO900 6-Burner Gas Range on Large Gas Oven



### **Short Form Specification**

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accomodate shelves (wxd 972x687mm). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm Stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

#### **Main Features**

- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- The two 6 kW high efficiency flower flame burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
  - -60 mm burners with continuous power regulation from 1,5 to 6 kW
  - -100 mm burners with continuous power regulation from 2.2 kW to 10 kW
- Large sized pan support in cast iron with long center fins to allow the use of the largest down to the smallest pans.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Control knobs provide smooth, continuous rotation from min to max power level.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

**APPROVAL:** 

Part of

Electrolux Professional Group

Zanussi Professional www.zanussiprofessional.com



# Modular Cooking Range Line EVO900 6-Burner Gas Range on Large Gas Oven

# **Included Accessories**

• 1 of Chrome grid for large oven

PNC 206204

### **Optional Accessories**

•	Junction sealing kit	PNC	206086	
•	Draught diverter, 150 mm diameter	PNC	206132	
•	Matching ring for flue condenser, 150 mm diameter	PNC	206133	
•	4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install with base supports for feet/wheels.	PNC	206135	
•	Flanged feet kit	PNC	206136	
•	Frontal kicking strip for concrete installation, 1200 mm	PNC	206151	
•	Side handrail for right/left hand	PNC	206165	
•	Frontal handrail 400 mm	-	206166	
•	Single burner radiant plate for pan support		206170	
•	Single burner smooth plate for direct cooking - fits frontal burners only		206171	
•	Single burner ribbed plate for direct cooking - fits frontal burners only	PNC	206172	
	Frontal kicking strip, 1200 mm	-	206178	
	Frontal kicking strip, 1600 mm		206179	
	Pair of side kicking strips		206180	
	2 panels for service duct (single installation)	PNC	206181	
•	Large handrail (portioning shelf) 400 mm		206185	
٠	Frontal handrail 1200 mm		206191	
•	Frontal handrail 1600 mm		206192	
•	2 panels for service duct (back to back installation)		206202	
	Chrome grid for large oven		206204	
•	Pair of cast iron grids for gas ranges and boiling tops		206208	
•	4 feet for concrete installation (not for 900 line freestanding grill)	PNC	206210	
•	Flue condenser for 1 module, 150 mm diameter		206246	
•	Water column with swivel arm (water column extension not included)	PNC	206289	
•	Water column extension		206290	
•	Stainless steel grid for 2 burners		206298	
	Chimney upstand, 1200 mm		206306	
•	2 side covering panels, height 700 mm, depth 900 mm			
	Wok pan support for open burners (EV0700/900)	PNC	206363	
•	Base support for feet or wheels - 1200mm (EV0700/EV0900)	PNC	206368	
•	Base support for feet or wheels - 1600mm (EV0700/900)	PNC	206369	


•	Base support for feet or wheels - 2000mm	PNC 206370	
	(EV0700/900)		


- Rear paneling 1200mm (EV0700/900) PNC 206376 🗆
- Kit town gas nozzles (G150) for EV0900 PNC 206385 gas ranges on gas oven
- Chimney grid net, 400mm PNC 206400
- Pressure regulator for gas units PNC 927225

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



## Modular Cooking Range Line EVO900 6-Burner Gas Range on Large Gas Oven

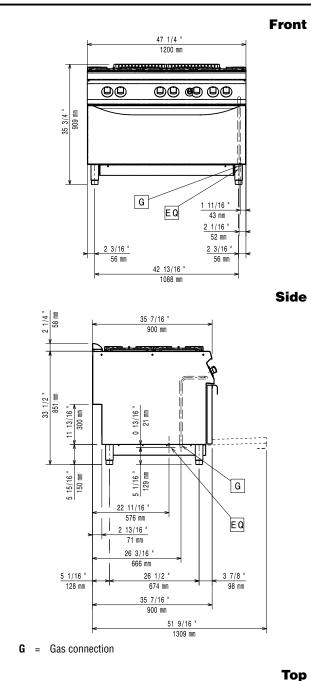

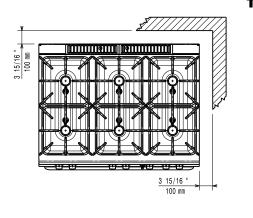

# Gas

Gas Power:	
392037 (Z9GCGL6CL0)	56 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Natural Gas
Gas Inlet:	1/2"

#### **Key Information:**

Front Burners Power:	6 - 6 kW
Back Burners Power:	10 - 10 kW
Middle Burners Power:	6 - 0/6 - 0 kW
Back Burners Dimension - mm	Ø100 Ø100
Front Burners Dimension - mm	Ø60 Ø60
Middle Burners Dimension - mm	Ø60 Ø60
Oven working Temperature:	120 °C MIN; 280 °C MAX
Oven Cavity Dimensions (width):	900 mm
Oven Cavity Dimensions (height):	380 mm
Oven Cavity Dimensions (depth):	700 mm
Net weight:	200 kg
Shipping weight:	217 kg
Shipping height:	1080 mm
Shipping width:	1020 mm
Shipping depth:	1270 mm
Shipping volume:	1.4 m³
Certification group:	N9CG

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

> Modular Cooking Range Line EVO900 6-Burner Gas Range on Large Gas Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.